



TECHNICAL MANUAL

IROCK Non-combustible Insulation Board

1. Introduction
2. Physical Properties
3. Fire Performance
4. Installation

1.1 About This Manual:

This manual has been developed to effectively assist fabricators and contractors to work with IROCK. Due to the uncontrollable conditions onsite and different methods of job scope, as well as the variable skills and judgment of installers and the quality of equipment, tools, etc, the suggestions and recommendations contained in this manual are provided without warranty. The information and recommendations herein are believed to be correct at time of publishing.

BLUECHIP reserves the right to revise the contents of this manual without prior notice. Any construction or use of the product must be in accordance with all local zoning and/or building codes and in accordance with the current NCC at the time of use. Except as contained in a written warranty certificate, the supplier does not provide any other warranty, either express or implied, and shall not be liable for any damages, including consequential damages.

1.2 Company Background:

Founded in 2003 by five brothers, BLUECHIP has grown every year since to become one of Australia's leading suppliers of architectural building envelopes. BLUECHIP's product range covers the complete system from the structure out including all types of cladding materials, composite decking, sub-framing, insulation, waterproofing and fixings.

With offices in Sydney, Melbourne and Perth, BLUECHIP has supplied more than 3,000,000m² of materials to Australian projects since 2003. Our commitment to innovation and ongoing investment in R&D ensures BLUECHIP will continue to lead the market with BCA/NCC compliant facade solutions in the years ahead.

For architects and consultants, BLUECHIP's wide range of different materials and 'complete-system' approach enables the creation of inspiring high-performance facades. For builders and contractors, BLUECHIP's large local stock, well established supply chains and genuine appreciation for our clients means you can trust us to deliver as promised every time.

1.3 Company Details:

Company: Blue Chip Group Pty Ltd
ABN: 98 162 282 064
Head Office: 16 Ashby Close, Forrestfield WA 6058
Phone: 1300 945 123
Email: sales@bluechipgroup.net.au

Important Note:

IROCK is typically a non-faced board. If a facer is desired for a more attractive finish then IROCK can be supplied with a factory applied, prefinished white facer and matching joint tape. This product is called IROCK PLUS and for more information call **1300 945 123** or email sales@bluechipgroup.net.au for further details.



1.4 Product Description:

IROCK rockwool insulation board is a non-combustible insulation material widely used in external wall and facade applications which require high levels of fire safety and thermal performance. IROCK is manufactured by spinning a molten mixture of natural rock and other additives to create fine wool-like fibres which are bonded together using a thermoset resin to form a rigid insulation board. Compliant with NCC 2019 for use in external wall applications, IROCK offers excellent resistance to water absorption and is FSB-1 biosoluble for safe, comfortable installation and long-term performance.

Non-Combustible

IROCK is deemed non-combustible when tested to AS 1530.1 meaning it is compliant for use in external walls and cladding systems which are required to be non-combustible in buildings of types A & B construction.

Moisture Resistant

Although it is not suitable for permanent immersion or exposure to drenching, IROCK insulation board's thermal performance will not be adversely affected by condensation or contact with liquid water.

FSB-1 Biosoluble

Unlike some other insulation products, IROCK mineral-based fibres have an FSB-1 biosolubility rating and are classified non-hazardous in accordance with ASCC guidelines for safe, comfortable use.

Lightweight & Durable

IROCK rockwool insulation boards are both lightweight and highly durable for easy hassle-free handling onsite and they can be easily cut and formed to suit almost any application.

Cost Effective

With a nominal thermal conductivity of 0.036 W/mK and a very economical price-point, IROCK offers excellent thermal efficiency for minimal upfront cost along with life-cycle energy savings for the building in which it is installed.

Environmentally Friendly

Largely manufactured from recycled materials and natural rock, IROCK is environmentally friendly as an initial product and offers environmental benefits in application as thermal insulation.

NCC 2019 Compliant

NCC 2019 Clause C1.9 specifically requires all components of external walls including cladding, insulation and framing to be non-combustible and IROCK is one of only a few materials that meet these criteria.

Acoustic Benefit

IROCK is primarily intended as a thermal insulation material for section J compliance however as an added benefit, it also offers excellent acoustic properties helping to make buildings even more liveable.

1.5 More Information on IROCK:

<https://www.bluechipgroup.net.au/insulation-perth/non-combustible-rockwool-insulation.html>



2.1 Physical Properties – Technical Data

ITEM	TEST STANDARD	UNIT	RESULT
Combustibility	AS 1530.1	-	Pass
Ignitability Index	AS 1530.3	-	0
Spread of Flame Index	AS 1530.3	-	0
Heat Evolved Index	AS 1530.3	-	0
Smoke Developed Index	AS 1530.3	-	1
Thermal Conductivity	ASTM C 518	W/mK	0.036
Emittance of Foil Facings	ASTM E408-71	E	0.05
Material R-value at 0.036W/mK			
▪ 30mm Thickness*	ASTM C518	R-value	0.83*
▪ 40mm Thickness	ASTM C518	R-value	1.11
▪ 50mm Thickness*	ASTM C518	R-value	1.39*
▪ 60mm Thickness	ASTM C518	R-value	1.67
▪ 80mm Thickness	ASTM C518	R-value	2.22
▪ 100mm Thickness*	ASTM C518	R-value	2.78*
Unit Weight (Density)	Actual	Kg/m ³	100
Compressive Strength	ASTM C165-07	KN/m ²	10
Maximum Service Temperature	Actual	Degrees	<750
Melting Temperature	Actual	Degrees	>1000
Rockwool Content	Actual	%	>95
Resin Content	Actual	%	<5
Water Absorption	ASTM C1104	%	<1.1
Fungal Resistance	ASTM C655	-	Pass
Fibre Bio-solubility	ASCC	-	FSB-1
Corrosivity	Actual	pH	7-9

* NOTE: The 30mm, 50mm and 100mm options are “non-stock” and lead-times may apply.

3.1 Fire Performance

Manufactured by Blue Chip Group Pty Ltd; IROCK is a Deemed-to-Satisfy non-combustible insulation material in accordance with the BCA/NCC when tested to AS1530.1 and AS1530.3 and is compliant for use in both external walls and common walls as per the requirements of Clause C1.9.

Accordingly, in terms of fire compliance, IROCK can be installed in either concealed or exposed applications anywhere a non-combustible material is required including in all building classes and in any building of types A, B & C construction including buildings with or without a sprinkler system.

ITEM	TEST STANDARD	UNIT	RESULT
Non-combustible	AS 1530.1	CSIRO	Pass
Ignitability Index	AS 1530.3	AWTA	0
Spread of Flame Index	AS 1530.3	AWTA	0
Heat Evolved Index	AS 1530.3	AWTA	0
Smoke Developed Index	AS 1530.3	AWTA	0-1



4.1 IROCK Installation in Double Brick Cavity Application:

- Construct the inner leaf to at least an appropriate level to allow installation of IROCK insulation boards to proceed.
- Remove excess mortar and mortar droppings from exposed edges of any installed IROCK insulation boards.
- Measure and create holes in the IROCK insulation boards as required to allow for wall ties to protrude through.
- Apply the IROCK insulation boards to the external face of the internal leaf and secure in place using the wall ties and IROCK universal retaining clips.
- If IROCK is being relied upon to create a water barrier in accordance with AS 3700 requirements install a layer of FIRESPAN non-combustible sarking over the IROCK in accordance with AS 4200.2. Tape around the wall ties and along all the FIRESPAN sarking joints with INSULTAPE Reinforced Foil Tape.
- When taping a stiff plastic scraper or blade must be used to apply appropriate pressure to the tape. Surfaces must be sufficiently cleaned to ensure they are dry and free from dust, oil, or grease to ensure long-term tape adhesion.
- The outer leaf is then built up to the level of the top of the IROCK insulation boards and the above process is repeated until the full height of the wall is reached.
- The insulation boards shall be installed in accordance with the latest version of the Australian NCC/BCA as well as any other government regulations or requirements at any given time and for any project.

Important Information:


The instructions in this brochure are for illustration purposes only and are not meant to replace a licensed professional. Any construction or use of the product must be in accordance with all local zoning and/or building codes. The consumer assumes all risks and liability associated with the construction or use of this product. The consumer or contractor should take all necessary steps to ensure the safety of everyone involved in the project, including, but not limited to, wearing the appropriate safety equipment. Except as contained in a written warranty, the supplier does not provide any other warranty, either express or implied, and shall not be liable for any damages, including consequential damages.






4.2 IROCK Installation in Soffit Applications (Exposed or Concealed):

- IROCK insulation boards can be fully restrained to a concrete soffit using appropriate fasteners with a minimum head diameter of 35 mm.
- The fasteners should be evenly distributed over the whole area of the board and must offer a minimum 40 mm penetration into a solid substrate. Alternatively, a designer can calculate the required design strength to identify a suitable embedment for the design loading of a project and/or application.
- Standard fastener layout is 1 x fasteners in the corner of each board (no less than 100mm and no more than 150mm from edge of board) with additional 1 x fasteners in the middle of the board for total of 5 fasteners per 1200 x 600mm board (See below detail).

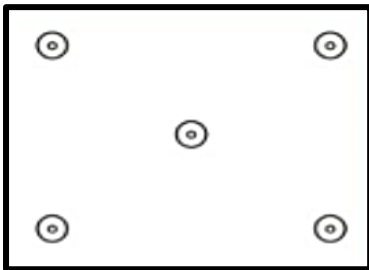

- Where the board may be subject to external wind pressure, the requirement for additional fixings should be assessed in accordance with appropriate Australian standards.
- Consideration should be given to the material the fixing is made from and should be deemed appropriate for the application, exposure and required fire rating by the fixing manufacturer.
- Board joints can be either staggered or squared (See below detail).

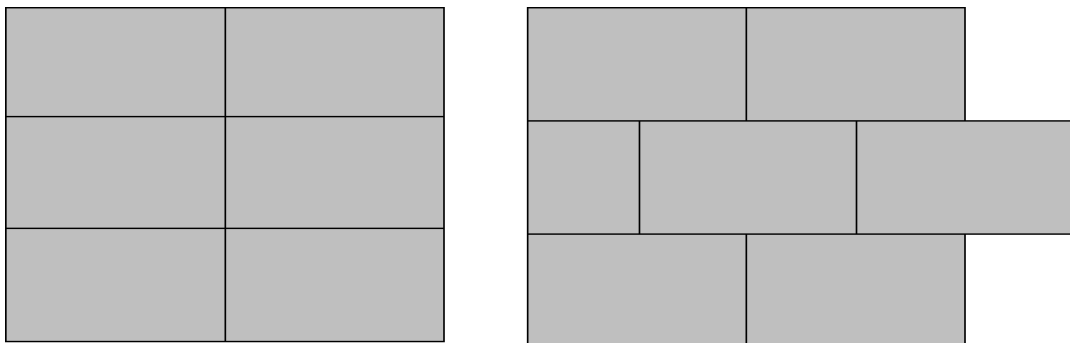

- Cutting should be carried out by using a fine-toothed saw or with a sharp knife ensuring accurate trimming to achieve close-butting joints and continuity of insulation.

Important Note:

If the soffit insulation is exposed and a facer is desired for a more attractive finish (applications such as a shopping centre carpark or internal ceiling) then IROCK can be supplied with a factory applied, prefinished white facer and matching joint tape. This product is called IROCK PLUS and for more information call **1300 945 123** or email sales@bluechipgroup.net.au for further details.



4.3 IROCK Installation in Frame Wall Lining Applications:

- Install suitable furring channel clips at required spacings for chosen lining.
- Fit the IROCK insulation boards over furring channel clips by pushing over the clips to touch the wall, and so that the wings of the clips penetrate the internal side of the insulation board. Care should be taken to avoid the fibre structure of the IROCK insulation boards separating by neatly trimming with a sharp knife where the furring channel clip will penetrate the insulation.
- Butt join the IROCK insulation boards to provide a continuous insulation layer tight against the internal side of the wall.
- If IROCK is being relied upon to create a water barrier in accordance with AS 3700 requirements install a layer of FIRESPAN non-combustible sarking over the IROCK in accordance with AS 4200.2. Tape around the furring channel clips and along all the FIRESPAN sarking joints with INSULTAPE Reinforced Foil Tape.
- Install furring channels by clipping into channel clips. Furring channels should be tight against the internal face of the IROCK insulation boards.
- Install the chosen lining to the furring channels as per manufacturer's instructions.
- The insulation boards shall be installed in accordance with the latest version of the Australian NCC/BCA as well as any other government regulations or requirements at any given time and for any project.

Important Information:

The instructions in this brochure are for illustration purposes only and are not meant to replace a licensed professional. Any construction or use of the product must be in accordance with all local zoning and/or building codes. The consumer assumes all risks and liability associated with the construction or use of this product. The consumer or contractor should take all necessary steps to ensure the safety of everyone involved in the project, including, but not limited to, wearing the appropriate safety equipment. Except as contained in a written warranty, the supplier does not provide any other warranty, either express or implied, and shall not be liable for any damages, including consequential damages.

