




BLUECHIP

We've Got It Covered

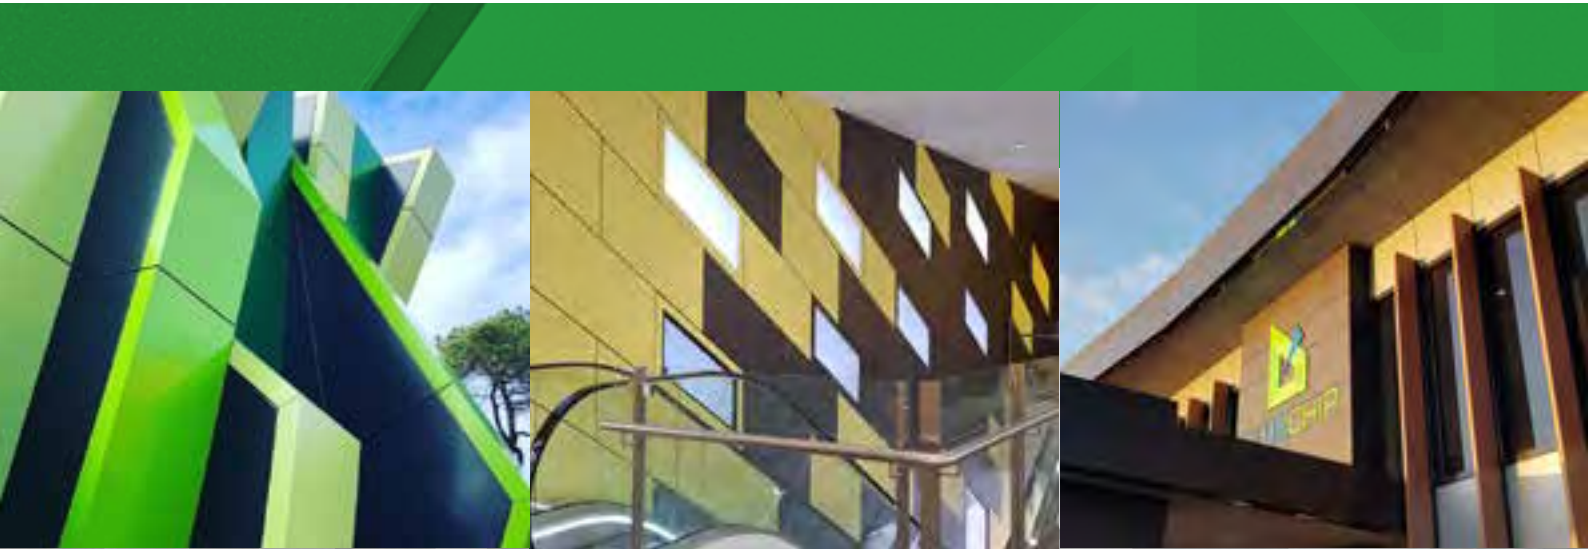

Architectural Catalogue

www.bluechipgroup.net.au



FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.



BLUECHIP

Metal Cladding

1

ULTRACORE	2
ULTRABOND	8
ULTRASURE	12
ULTRANAMEL	16
ULTRALIGN	20
PRODUCT RATES	121



BLUECHIP

Natural Cladding

27

EQUITONE	28
NATURION	34
ULTRAPEARL	38
TERRAFACE	42
CEDRAL	46
PRODUCT RATES	121



BLUECHIP

Timber Cladding

51

ULTRAWOOD	52
SELEKTA	58
FUNDERMAX	62
RITECLAD	68
PRODUCT RATES	121



BLUECHIP

Decking Products

71

TRAXION	72
RITEDECK	74
RITEBOARD	76
RITESCREEN	78
PRODUCT RATES	121



BLUECHIP

Insulation Products

81

IBOARD	82
IBOARD G1	84
IBOARD P17	86
IROCK	88
INSULBLUE	90
FIRES PAN	92
SINIAT WD	94
PRODUCT RATES	121



BLUECHIP

Building Supplies

97

FIBRE CEMENT	98
STEEL FRAMING	106
EXTRUSIONS	108
FASTENERS	110
SARKING	
& INSULATION	114
TAPES & ADHESIVES	116
SEALANTS & TOOLS	118
SERVICE CHARGES	120

METAL CLADDING



2

ULTRACORE

Non-combustible Aluminium
Core Panel



8

ULTRABOND


Fire Resistant Aluminium
Composite Panel



12

ULTRASURE

Prefinished Solid Aluminium
Panel

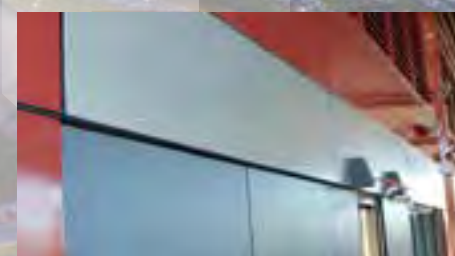

16

ULTRANAMEL

Vitreous Enamel Panel



20

ULTRALIGN

Aluminium Cladding and
Battens

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.


ULTRACORE

Non-combustible Aluminium Core Panel


Description

ULTRACORE manufactured by BLUECHIP is a Deemed-to-Satisfy (DtS) non-combustible aluminium panel when tested to AS 1530.1 and AS 1530.3 as per the requirements of the NCC 2019, Clause C1.9(e) (vii). It has also been tested by Exova Warringtonfire to BS 8414 and AS 5113 full-scale testing, proving it does not contribute to the spread fire. Visually, ULTRACORE aluminium core panel looks the same as traditional aluminium composite panel but with zero combustible core content (0%) meaning it achieves the lowest risk rating, category D, from the Insurance Council of Australia.


Product Benefits




PROVEN V-GROOVE DURABILITY
Unlike SOLID aluminium panels, ULTRACORE can demonstrate 40 years of proven corner durability when using the common v-groove folding system. This is because the front skin is not impacted when v-grooving.




LESS THERMAL CONDUCTIVITY
ULTRACORE aluminium core panel has thermal conductivity of 2.54 W/mK compared to 205 W/mK for SOLID aluminium panel. This means 80x less heat transfer into the building for greater fire safety and section J compliance.




AS 1530.1 NON-COMBUSTIBLE
ULTRACORE is one of the few aluminium panels globally that is Deemed-to-Satisfy non-combustible when tested to AS 1530.1 and AS 1530.3 in accordance with the NCC 2019 Clause C1.9(e)(vii) requirements.




FASTER FABRICATION TIME
Compared to solid aluminium panel, ULTRACORE panel is much more cost-effective, faster and easier to fabricate on CNC machines using the well-proven z-angle cassette system with concealed mechanical fixings.




AS 5113 FIRE TESTING
ULTRACORE is Deemed-to-Satisfy non-combustible so does not require further testing. However it has been tested to AS 5113 full-scale testing by Exova Warringtonfire, proving it does not contribute to the spread of fire.



OIL-CANNING RESISTANCE
Oil-canning is the uneven distribution of tension in SOLID aluminium panels which results in a rippling effect on the facade. The superior mechanical properties of ULTRACORE guarantees against oil-canning.



ZERO POLYETHYLENE (0%)
Unlike most other aluminium panel products including FR, Plus, A2 and NC type panels, the ULTRACORE aluminium core panel contains ZERO percent flammable polyethylene (0%) and each lamina is 100% non-combustible.



LESS CARBON FOOTPRINT
ULTRACORE aluminium core panel uses approximately 50% less aluminium per m2 than SOLID aluminium panels for much less carbon footprint and it is 50% lighter for significant structural and labour savings.

Product Range



ULTRACORE
Metallic Colours



ULTRACORE
Solid / Matt Colours



ULTRACORE
Sparkling Colours



ULTRACORE
Chromatic Colours



ULTRACORE
Imitation Finishes

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRACORE Metallic Stock Colours UC9701, UC9205, UC9134, UC9137, UC9308, UC4150, UC5292, UC9809	2500, 3200, 4000 x 1500mm	Stock	1 Sheet
ULTRACORE Solid Stock Colours UC1005, UC1025, UC9902, UC1255, UC1270, UC9130, UC1590, UC1460, UC1140, UC1190, UC1677	2500, 3200, 4000 x 1500mm	Stock	1 Sheet
ULTRACORE Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	8-10 Weeks	300m ²
ULTRACORE Matt, Sparkling, Chromatic & Imitation Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	8-10 Weeks	300m ²

System Components



PAGE 92
FIRESPAN
AS 1530.1 Sarking



PAGE 106
STUDTEK
Steel Sub-framing



PAGE 108
EXTRUSIONS
Z-angles & Trims



PAGE 116
TAPES & GASKETS
Foil & Foam Tapes



PAGE 118
JOINT SEALANT
Prolastik & Sikaflex

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.





ULTRACORE

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Metallic Colours

UC9701 Sterling Silver Metallic (s)	UC9205 Champagne Metallic (s)	UC9134 Smoke Silver Metallic (s)	UC9137 Dark Grey Metallic (s)	UC9308 Bronze Metallic (s)	UC4344 Medium Bronze Metallic	UC4150 Gold Metallic (s)	UC5292 Obsidian Metallic (s)
UC9809 Copper Metallic (s)	UC4190 Tangerine Metallic	UC4420 Blue Grey Metallic	UC9031 Jade Metallic				

Solid Colours

UC1005 Arctic White (s)	UC1025 Arctic Gloss (s)	UC9902 Clean White (s)	UC1255 Volcanic Grey (s)	UC1270 Hunter Grey (s)	UC9130 Carbon Black (s)	UC1590 Global Green (s)	UC1460 Royal Blue (s)
UC1140 Atomic Yellow (s)	UC1190 Pilbara Orange (s)	UC1677 Centurion Red (s)					

BCG Colours

UC9016 Traffic White	UC9010 Pure White	UC1013 Oyster White	UC1015 Light Ivory	UC1014 Ivory	UC7044 Silk Grey	UC7030 Stone Grey	UC7005 Mouse Grey
UC9002 Grey White	UC7035 Light Grey	UC7004 Signal Grey	UC7000 Squirrel Grey	UC7011 Iron Grey	UC7016 Anthracite Grey	UC7022 Umbra Grey	UC9005 Jet Black
UC6019 Pastel Green	UC6021 Pale Green	UC6018 Yellow Green	UC6037 Pure Green	UC6029 Mint Green	UC6026 Opal Green	UC6005 Moss Green	UC6003 Olive Green
UC5024 Pastel Blue	UC5023 Distant Blue	UC5015 Sky Blue	UC5021 Water Blue	UC5019 Capri Blue	UC5002 Ultramarine Blue	UC5008 Grey Blue	UC5011 Steel Blue
UC1016 Sulfur Yellow	UC1018 Zinc Yellow	UC1023 Traffic Yellow	UC1037 Sun Yellow	UC8008 Olive Brown	UC8028 Terra Brown	UC8019 Grey Brown	UC4007 Purple Violet
UC1017 Saffron Yellow	UC2003 Pastel Orange	UC2004 Pure Orange	UC2002 Vermillion	UC3020 Traffic Red	UC3001 Signal Red	UC3003 Ruby Red	UC3005 Wine Red



UNLIMITED CUSTOM COLOURS
ULTRACORE has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.



ULTRACORE

Colour Chart

Matt Colours



UCM884 Matt Silver



UCM885 Matt White



UCM886 Matt Pearl



UCM001 Matt Ivory



UCM006 Matt Bronze



UCM004 Matt Graphite



UCM003 Matt Copper



UCM002 Matt Gold

Sparkling Colours



UC7010 Sparkling White Gloss



UC4725 Sparkling Light Grey



UC7250 Sparkling Dark Grey



UC7295 Sparkling Black Gloss

Chromatic Colours



UC7090 Chromatic Golden Snow



UC7430 Chromatic Sunset Purple



UC7350 Chromatic Rustic Bronze



UC7290 Chromatic Galaxy Silver



UC7480 Chromatic Indigo Violet



UC7450 Chromatic Oriental Silk



UC7490 Chromatic Tropical Ocean



UC7510 Chromatic Martian Green



UC7160 Chromatic Antique Gold



UC7170 Chromatic Honey Gold




UC7180 Chromatic Tiger Orange




UC7190 Chromatic Sahara Copper


Timber Imitations




UC8310 Rustic Pine




UC8320 Unique Beli




UC8340 Vintage Walnut




UC8355 Elegant Teak



UC8385 Ascot Teak



UC8650 Noble Bloodwood



UC8395 Polished Rengas

Stone Imitations



UC6060 Marble Pearl White



UC6385 Marble Cashmir Beige



UC6315 Travertine Atlas Beige



UC6305 Travertine Calico Cream




UC6310 Granite Aurisina Beige




UC6280 Granite Magenite Black


Metal Imitations




UC2200 Brushed Silver



UC5220 Zinc Dark



UC5260 Zinc Charcoal



UC5150 Brushed Copper



UNLIMITED CUSTOM COLOURS
ULTRACORE has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.



ULTRABOND

Fire Resistant Aluminium Composite Panel

Description

ULTRABOND is a 4mm thick fire resistant aluminium composite panel comprising of a >70% mineral filled core, sandwiched between two prefinished aluminium or other natural metal cover sheets such as zinc, copper or stainless steel. Utilising the reknowned PVDF paint system, ULTRABOND aluminium composite panel has been thoroughly tested in Australia by NATA accredited CSIRO and Exova Warringtonfire and is manufactured to the highest quality standards. It is also BCA/NCC compliant for all type C* construction projects and has full-scale fire testing in accordance with AS 5113.

Product Benefits

NCC 2019 COMPLIANCE
ULTRABOND fire resistant aluminium composite panel is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.

PVDF PAINT SYSTEM
ULTRABOND fire resistant aluminium composite panel only uses the highly recognised PVDF Kynar 500 or FEVE paint systems known for their high durability and optimum resistance to weather and industrial pollution.

AS 5113 FIRE TESTING
Although not required for type C construction, ULTRABOND fire resistant aluminium composite panel has been tested to AS 5113 by NATA approved Exova Warringtonfire to prove it does contribute to the spread of fire.

LOW MAINTENANCE
The ULTRABOND FR fire resistant aluminium composite panel finish has undergone 40+ years of exposure testing which is continuing to confirm the superior properties of fluoropolymer coatings.

UNLIMITED CUSTOM COLOURS
ULTRABOND fire resistant aluminium composite panel has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.

COST EFFECTIVE
ULTRABOND fire resistant aluminium composite panel has enjoyed consistent growth not only due to the desire for a clean and modern look, but also a product offering rapid cost effective installation.

LOCAL STOCK AVAILABLE
ULTRABOND fire resistant aluminium composite panel is stocked in a range of standard solid colours and metallic colours for fast delivery at all times.

FULL WARRANTY
ULTRABOND fire resistant aluminium composite panel has a long track record of consistency, reliability and quality allowing us to offer up to 15 year's warranty when installed by a licensed installer.

Product Range

ULTRABOND
Metallic Colours

ULTRABOND
Solid Colours

ULTRABOND
Natural Zinc

ULTRABOND
Natural Copper

ULTRABOND
Mirror Stainless

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRABOND Metallic Stock Colours UB9701, UB9205, UB9134, UB9137, UB9308	2500, 3200, 4000 x 1570mm	Stock	1 Sheet
ULTRABOND Solid Stock Colours UB1005, UB9130, UB1677	2500, 3200, 4000 x 1570mm	Stock	1 Sheet
ULTRABOND Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1570mm	8-10 Weeks	300m²
ULTRABOND Natural Metal Finishes	2500, 3200, 4000 x 1220mm	8-10 Weeks	300m²

System Components

PAGE 92

FIRESPAN
AS 1530.1 Sarking

PAGE 106

STUDEK
Steel Sub-framing

PAGE 108

EXTRUSIONS
Z-angles & Trims

PAGE 116

TAPES & GASKETS
Foil & Foam Tapes

PAGE 118

JOINT SEALANT
Prolastik & Sikaflex

*For types A & B construction, use ULTRACORE non-combustible aluminium core panel - see page 2.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRABOND

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Metallic Colours

UB9701 Sterling Silver Metallic (s)	UB9205 Champagne Metallic (s)	UB9134 Smoke Silver Metallic (s)	UB9137 Dark Grey Metallic (s)	UB9308 Bronze Metallic (s)	UB4150 Gold Metallic	UB9809 Copper Metallic

Solid Colours

UB1005 Arctic White (s)	UB1255 Volcanic Grey	UB9130 Carbon Black (s)	UB1460 Royal Blue	UB1140 Atomic Yellow	UB1190 Pilbara Orange	UB1677 Centurion Red (s)

BCG Colours

UB9016 Traffic White	UB9010 Pure White	UB1013 Oyster White	UB1015 Light Ivory	UB1014 Ivory	UB7044 Silk Grey	UB7030 Stone Grey	UB7005 Mouse Grey
UB9002 Grey White	UB7035 Light Grey	UB7004 Signal Grey	UB7000 Squirrel Grey	UB7011 Iron Grey	UB7016 Anthracite Grey	UB7022 Umbra Grey	UB9005 Jet Black
UB6019 Pastel Green	UB6021 Pale Green	UB6018 Yellow Green	UB6037 Pure Green	UB6029 Mint Green	UB6026 Opal Green	UB6005 Moss Green	UB6003 Olive Green
UB5024 Pastel Blue	UB5023 Distant Blue	UB5015 Sky Blue	UB5021 Water Blue	UB5019 Capri Blue	UB5002 Ultramarine Blue	UB5008 Grey Blue	UB5011 Steel Blue

BGC Colours Cont'd

UB1016 Sulfur Yellow	UB1018 Zinc Yellow	UB1023 Traffic Yellow	UB1037 Sun Yellow	UB8008 Olive Brown	UB8028 Terra Brown	UB8019 Grey Brown	UB4007 Purple Violet
UB1017 Saffron Yellow	UB2003 Pastel Orange	UB2004 Pure Orange	UB2002 Vermillion	UB3020 Traffic Red	UB3001 Signal Red	UB3003 Ruby Red	UB3005 Wine Red

Natural Metal Finishes

UB5740 Blue Grey Zinc	UB5760 Graphite Grey Zinc	UB5160 Natural Copper	UB5800 Stainless Steel Mirror



UNLIMITED CUSTOM COLOURS

ULTRABOND has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.




ULTRASURE

Prefinished Solid Aluminium Panel


Description

Designed to compliment our ULTRACORE non-combustible core panel, ULTRASURE completes our range of BCA compliant, Deemed-to-Satisfy non-combustible aluminium cladding solutions. The 3mm solid aluminium cladding panels offer very high impact resistance and can be curved, rolled or perforated. ULTRASURE features the same factory applied PVDF coating system widely renowned for its superior durability and finish quality. Unlike traditional powder coating, prefinished PVDF panels do not require fabrication prior to coating greatly reducing lead-times and costs.


Product Benefits




FINISHED BEFORE FABRICATION
Unlike traditional powder coated panels, ULTRASURE is prefinished with factory applied PVDF coating and a protective peel-off film before fabrication into cladding panels providing many practical advantages.




COLOUR-MATCHED FIXINGS
BLUECHIP does not endorse installing any brand of SOLID aluminium panels with the v-grooved cassette system - it is flawed methodology which will likely lead to future cracking and water ingress issues.




AS 1530.1 NON-COMBUSTIBLE
ULTRASURE is one of the few aluminium cladding panel solutions that is Deemed-to-Satisfy non-combustible when tested to AS 1530.1 and AS 1530.3 as per the requirements of NCC 2019 Clause C1.9(e)(v).




PVDF PAINT SYSTEM
ULTRASURE 3mm aluminium panel only uses the highly recognised PVDF KYNAR 500 or FEVE paints known for their high durability, providing the optimum resistance to weather and industrial pollution.




NCC 2019 COMPLIANCE
ULTRASURE solid aluminium panel is Deemed-to-Satisfy non-combustible as per NCC 2019 Clause C1.9(e)(v) making it compliant for use as external cladding on any project of types A, B & C construction.



CURVE, ROLL OR PERFORATE
The ULTRASURE 3mm aluminium panel offers excellent design versatility as it can be made into panels of almost any shape and size as well as being suitable for curved panels, rolling and perforating.



UNLIMITED CUSTOM COLOURS
ULTRASURE 3mm solid aluminium panel utilises the same PVDF coating as ULTRABOND FR and ULTRACORE so it is available in the same extensive colour range and custom colours. MOQ's apply.



MANUFACTURER'S WARRANTY
ULTRASURE 3mm aluminium panel coating system has a long track record of consistency, reliability and quality allowing us to offer up to 15 year's warranty when installed by a licensed installer.


Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRASURE Metallic Colours	2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m ²
ULTRASURE Solid Colours	2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m ²
ULTRASURE Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m ²
ULTRASURE Metal Imitation Finishes	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m ²

System Components

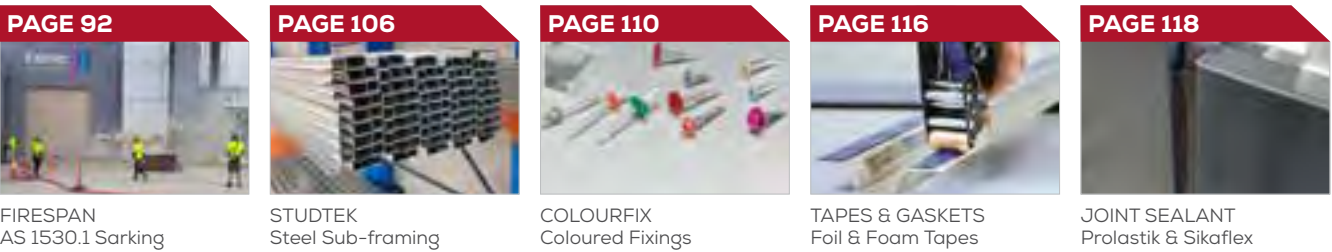

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRASURE

Colour Chart

Metallic Colours



US9701 Sterling Silver Metallic



US9205 Champagne Metallic



US9134 Smoke Silver Metallic



US9137 Dark Grey Metallic



US9308 Bronze Metallic



US4150 Gold Metallic



US9809 Copper Metallic

Solid Colours



US1005 Arctic White



US1255 Volcanic Grey



US9130 Carbon Black



US1460 Royal Blue



US1140 Atomic Yellow



US1190 Pilbara Orange



US1677 Centurion Red

BCG Colours



US9016 Traffic White



US9010 Pure White



US1013 Oyster White



US1015 Light Ivory



US1014 Ivory



US7044 Silk Grey



US7030 Stone Grey



US7005 Mouse Grey



US9002 Grey White



US7035 Light Grey



US7004 Signal Grey



US7000 Squirrel Grey



US7011 Iron Grey



US7016 Anthracite Grey



US7022 Umbra Grey



US9005 Jet Black



US6019 Pastel Green



US6021 Pale Green



US6018 Yellow Green



US6037 Pure Green



US6029 Mint Green



US6026 Opal Green



US6005 Moss Green



US6003 Olive Green



US5024 Pastel Blue



US5023 Distant Blue



US5015 Sky Blue



US5021 Water Blue



US5019 Capri Blue



US5002 Ultramarine Blue



US5008 Grey Blue



US5011 Steel Blue

BGC Colours Cont'd



US1016 Sulfur Yellow



US1018 Zinc Yellow



US1023 Traffic Yellow



US1037 Sun Yellow



US8008 Olive Brown



US8028 Terra Brown



US8019 Grey Brown



US4007 Purple Violet



US1017 Saffron Yellow



US2003 Pastel Orange



US2004 Pure Orange



US2002 Vermilion



US3020 Traffic Red



US3001 Signal Red



US3003 Ruby Red



US3005 Wine Red

Metal Imitations



US2200 Brushed Silver



US5150 Brushed Copper



UNLIMITED CUSTOM COLOURS
ULTRASURE has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.




ULTRANAMEL

Vitreous Enamel Panel


Description

ULTRANAMEL vitreous enamel panel consists of a highly durable vitreous enamel coating applied to a decarbonised steel panel with an aluminium honeycomb or calcium silicate backing sheet. Vitreous enamelled architectural panels are routinely specified for commercial, institutional and infrastructure projects around the world; perfect for high impact, high traffic areas such as train stations, shopping malls and tunnels. ULTRANAMEL vitreous enamel panel has excellent anti-graffiti properties and is non-combustible providing unrivalled performance in public areas.


Product Benefits




UNLIMITED CUSTOM COLOURS
ULTRANAMEL vitreous enamel panel is available in an almost unlimited colour range. The original colour of the vitreous enamel panel is extremely durable and is expected to outlast a normal building life.




NON-COMBUSTIBLE
ULTRANAMEL vitreous enamel panel is a completely deemed-to-satisfy non-combustible steel cladding system in accordance with NCC 2019 C1.9(e)(vii), withstanding temperatures of over 400°C and are able to provide fire ratings of over 2 hours.




GRAFFITI PROOF
ULTRANAMEL vitreous enamel panel is extremely durable. The vitreous enamel coating has excellent scratch, graffiti and impact resistance making it ideal for areas of heavy traffic or extreme wear.




LOW MAINTENANCE
ULTRANAMEL vitreous enamel panel is very low maintenance. The surface is completely impervious to contaminants, extremely smooth and extremely low static, preventing dust adhesion and resulting in only minimal cleaning required.




UV RESISTANT
ULTRANAMEL vitreous enamel panel has a far superior colour consistency over time when compared to typical cladding panels. The colour and gloss level of these panels are unaffected by sunlight.



VERSATILE DESIGN
ULTRANAMEL vitreous enamel panel can be custom designed into a wide range of shapes and dimensions. This compiled with a vast colour range make ULTRANAMEL a versatile design choice.




FAST INSTALLATION
ULTRANAMEL vitreous enamel panel is manufactured to order from provided shop drawings. The panels are formed into pre-made cassettes with fixing clips ready for fast and easy onsite installation.




HYGIENIC SURFACE
ULTRANAMEL vitreous enamel panel has a completely non-porous surface that does not absorb any bacteria. The non-stick surface allows intense cleaning with hospital grade cleaning agents.


Product Range




ULTRANAMEL Vitreous Enamel




ULTRANAMEL Flat Panels



ULTRANAMEL L-shaped Panels



ULTRANAMEL U-shaped Panels



ULTRANAMEL Curved Panels

Availability

DESCRIPTION	PANEL SIZES	LEAD TIME	MOQ
ULTRANAMEL Flat Panels	Custom Sizes up to 2400 x 1150mm	10-12 Weeks	1 Panel
ULTRANAMEL L-shaped Panels	Custom Sizes up to 1600 x 1150m (1150mm is Width + Return)	10-12 Weeks	1 Panel
ULTRANAMEL U-shaped Panels	Custom Sizes up to 1600 x 1150m (1150mm is Width + Both Returns)	10-12 Weeks	1 Panel
ULTRANAMEL Curved Panels	Custom Sizes up to 1600 x 1150m (1150mm is Curved to Min. 300mm Radius)	10-12 Weeks	1 Panel

System Components



PAGE 92
FIRESPAN AS 1530.1 Sarking



PAGE 94
SINIAT WD Rigid Air Barrier



PAGE 106
STUDTEK Steel Sub-framing



PAGE 108
NVELOPE Aluminium Framing



PAGE 118
SEALANTS Prolastik & Sikaflex

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




ULTRANAMEL

Colour Chart

BCG Colours

							
UN9016 Traffic White	UN9010 Pure White	UN1013 Oyster White	UN1015 Light Ivory	UN1014 Ivory	UN7044 Silk Grey	UN7030 Stone Grey	UN7005 Mouse Grey
							
UN9002 Grey White	UN7035 Light Grey	UN7004 Signal Grey	UN7000 Squirrel Grey	UN7011 Iron Grey	UN7016 Anthracite Grey	UN7022 Umbra Grey	UN9005 Jet Black
							
UN6019 Pastel Green	UN6021 Pale Green	UN6018 Yellow Green	UN6037 Pure Green	UN6029 Mint Green	UN6026 Opal Green	UN6005 Moss Green	UN6003 Olive Green
							
UN5024 Pastel Blue	UN5023 Distant Blue	UN5015 Sky Blue	UN5021 Water Blue	UN5019 Capri Blue	UN5002 Ultramarine Blue	UN5008 Grey Blue	UN5011 Steel Blue

BGC Colours Cont'd

							
UN1016 Sulfur Yellow	UN1018 Zinc Yellow	UN1023 Traffic Yellow	UN1037 Sun Yellow	UN8008 Olive Brown	UN8028 Terra Brown	UN8019 Grey Brown	UN4007 Purple Violet
							
UN1017 Saffron Yellow	UN2003 Pastel Orange	UN2004 Pure Orange	UN2002 Vermilion	UN3020 Traffic Red	UN3001 Signal Red	UN3003 Ruby Red	UN3005 Wine Red



UNLIMITED CUSTOM COLOURS
ULTRANAMEL has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.


ULTRALIGN

Aluminium Cladding & Battens


Description

ULTRALIGN intelligent aluminium facade system is available in a range of solid aluminium profiles providing a reliable and attractive modern facade alternative to other commercial cladding products. ULTRALIGN products have been specifically designed by experienced commercial facade professionals to meet the demands of today's facade industry. Australian made using the finest raw materials and finish options, ULTRALIGN offers an unprecedented level of quality, reliability, and longevity with an extensive range of colours, textures, and finish options, available in both standard and custom sizes.


Product Benefits




AS 1530.1 NON-COMBUSTIBLE
ULTRALIGN products are made of 100% solid aluminium which is totally non-combustible to AS 1530.1. Architects, engineers, and tenants can be assured ULTRALIGN will not burn or contribute to fire spread.




ENVIRONMENTALLY SUSTAINABLE
ULTRALIGN cladding is a 100% recyclable product. Energy, emissions, wastage and materials are saved in every aspects of the product from manufacturing, to, delivery, installation and recycling.




INTELLIGENT INSTALLATION
The ULTRALIGN profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has one single swarf-free contact point for superior consistency and weather-proofing.




MINIMAL FABRICATION
ULTRALIGN panels can be ordered to custom lengths which eliminates additional fabrication. Panels are simply interlocked and tightened, then fixed. This also optimises usability and decreases waste.




PREFINISHED SYSTEM
The entire ULTRALIGN range is pre-finished. This means there is no requirement for painting or onsite finishing. Our finish options are attractive and durable – guaranteed to stand the test of time.



INCREDIBLE AESTHETICS
ULTRALIGN profiles all have their own unique look with classic shadow lines, sharp step features or bold standing seams. Add in any anodised, powdercoat or wood grain finish and the options are limitless.












100% AUSTRALIAN MADE
ULTRALIGN is a 100% Australian owned, designed and made product, which contributes to it's outstanding quality and fast lead times. Using ULTRALIGN aids all aspects of the Australian economy



INDUSTRY LEADING WARRANTY
ULTRALIGN's 20 year product warranty is one of the longest of any facade product on the market today. Clients can be confident that their facade will remain attractive and durable for years to come.

Profiles

	Specification Code: UL*G155 ULTRALIGN Groove Profile
	Specification Code: UL*C205 ULTRALIGN Cabin Profile
	Specification Code: UL*S205 ULTRALIGN Seam Profile
	Specification Code: UL*B5050 ULTRALIGN 50 x 50 Batten
	Specification Code: UL*B10050 ULTRALIGN 100 x 50 Batten
	Specification Code: UL*B15050 ULTRALIGN 150 x 50 Batten
	Specification Code: UL*B20050 ULTRALIGN 200 x 50 Batten
	Specification Code: UL*B25050 ULTRALIGN 250 x 50 Batten
	Specification Code: UL*B30050 ULTRALIGN 300 x 50 Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
UL*G15518	ULTRALIGN 155 x 18mm Groove (Colour), 6.5m Length	2-3 Weeks	1 Length
UL*C20530	ULTRALIGN 205 x 30mm Cabin (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UL*S20548	ULTRALIGN 205 x 48mm Seam (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UL*BXXX50	ULTRALIGN XXX x 50mm Batten (Colour), 6.5m Length	2-3 Weeks	1 Length
ULEXXX50	ULTRALIGN XXX x 50mm Batten End Cap (Colour)	2-3 Weeks	1 End Cap

(*) The asterisk in the code denotes the specified type of finish to be applied to the aluminium extrusion as follows; U = Ultrawood Timber Colours, A = Anodised Colours and P = Powdercoat Colours.


System Components

PAGE 92




FIRESPAN
AS 1530.1 Sarking

PAGE 106



STUDTEK
Steel Sub-framing

PAGE 109




CLADTRIM
Colour-match Trims

PAGE 117



ADHESIVES
SikaTack & 11FC

PAGE 110



FASTENERS
Cladding Fixings

INSTALL & TECHNICAL













For installation and technical information, scan the QR code and view 'Downloads' tab.










ULTRALIGN

Colour Chart

Anodised Colours

							
UL0104 Asteroid	UL0320 Comet Trail	UL1225 Light Year	UL1305 Moonshine	UL1207 Lunar Glow	UL1914 Scintillation	UL0110 Astro Journey	UL0925 Infinity
							
UL1919 Solar Storm	UL0314 Constellation	UL1519 Orion Sky	UL1904 Stellar Distance				

Material Colours

							
UL1602 Pale Brushed	UL1616 Pale Polished	UL1614 Pale Natural	UL0702 Grey Brushed	UL0716 Grey Polished	UL0714 Grey Natural	UL0102 Authentic Brushed	UL0116 Authentic Polished
							
UL0114 Authentic Natural	UL1618 Pale Rust	UL0318 Coral Rust	UL0118 Authentic Rust	UL2118 Uluru Rust	UL0418 Dark Rust	UL2102 Uluru Brushed	UL2116 Uluru Polished
							
UL2114 Uluru Natural	UL0202 Bronze Brushed	UL1502 Ochre Brushed	UL1514 Ochre Natural				

Powdercoat Excel Colours

							
GA029A Pearl White Gloss	GD230A Domain Matt	GD031A Primrose Gloss	GD245A Classic Cream Matt	GA236A Surfmist Matt	GM235A Evening Haze Matt	GL284A Shale Grey Matt	GL252A Dune Matt
							
GD215A Harvest Matt	GD214A Paperbark Matt	GM242A Gully Matt	GM214A Jasper Matt	GG219A Headland Matt	GG262A Manor Red Matt	GM234A Terrain Matt	GL205A Woodland Matt
							
GM204A Riversand Matt	GL266A Windspray Matt	GP208A Basalt Matt	GL236A Ironstone Matt	GK203A Bushland Matt	GL210A Wallaby Matt	GJ203A Deep Ocean Matt	GL229A Monument Matt
							
GD274A Cove Matt	GK236A Pale Eucalypt Matt	GK298A Wilderness Matt	GK277A Mangrove Matt	GK274A Cottage Green Matt	GK030A Hawthorn Green Gloss	GK044A Heritage Green Gloss	GL035A Charcoal Gloss
							
GN231A Night Sky Matt							









ULTRALIGN

Colour Chart



Powdercoat Living Colours

							
GA030A Bright White Gloss	GA124A White Satin	GA078A Pearl White Gloss	GA160A Shoji White Satin	GA057A White Birch Gloss	GA211A Off White Matt	GL258A Oyster Grey Matt	GL107A APO Grey Satin
							
GD037A Primrose Gloss	GD025A Magnolia Gloss	GD016A Almond Ivory Gloss	GD188A Doeskin Satin	GD042A Rivergum Gloss	GD007A Barley Gloss	GD247A Stone Beige Matt	GM175A Pottery Satin
							
GL060A Storm Grey Gloss	GL175A Olde Pewter Satin	GG142A Claret Satin	GL031A Transformer Grey Gloss	GL040A Notre Dame Gloss	GM100A Hamersley Brown Satin	GL015A Roseberry Grey Gloss	GN063A Coral Black Gloss
							
GN248A Custom Black Matt	GN150A Black Satin						

Powdercoat Vivica Colours

				
GW003K Mercury Silver Gloss	GL211A Citi Matt	GY070A Ultra Silver Gloss	GY119A Nobel Silver Pearl Satin	GY184C Palladium Silver Pearl Satin
				
GY270A Asteroid Pearl Matt	GL249A Storm Front Matt	GY042A Black Onyx Gloss	GY237A Charcoal Pearl Matt	GM019A Charcoal Metallic Gloss

Precis Colours

	
GY21AA Natural Shimmer Matt	GY20BA Dark Bronze Matt

Powdercoat Anodic Colours

						
GY221A Anodic Clear Matt	GD227A Anodic Off White Matt	GL237A Anodic Silver Grey Matt	GY235A Anodic Natural Matt	GY276A Anodic Champagne Matt	GY114A Anodic Bronze Satin	GL213A Anodic Dark Grey Matt

Powdercoat Sable Colours


						
GL320A Sable Grey Nurse	GY301A Sable Silver	GL277A Sable Brilliance	GN271A Sable Asteroid	GX350A Sable Cor Ten	GN297A Sable Bass	GN341A Sable Black

Powdercoat Ultriva Colours

							
YA278A Pearl White Matt	YY245A Citi Pearl Matt	YY276A Champagne Pearl Matt	YY223A Anodic Natural Matt	YX207C French Champagne Matt	YY25AA Precis Natural Shimmer Matt	YY22BA Precis Pure Gold Matt	YY20BA Precis Dark Bronze Matt
							
YN21BA Precis Black Ink Matt	YL264A Monument Matt	YN201A Ebony Matt	YY225A Bronze Pearl Matt	YY366A Sable Medium Bronze	YW100C Eternal Silver Satin	YY377A Sable Brilliance	YY263A Titanium Pearl Matt
							
YY270A Asteroid Pearl Matt	YY397A Sable Bass	YL238A Charcoal Matt	YY237A Charcoal Pearl Matt				

Powdercoat Vitality Colours

							
GE087A Brilliant Yellow Gloss	GK063A Lycra Strip Gloss	GF049A Sensation Gloss	GG155A Lobster Satin	GK051A Viper Green Gloss	GK043A Shamrock Green Gloss	GJ045A Bondi Blue Gloss	GJ174A Jaybird Satin

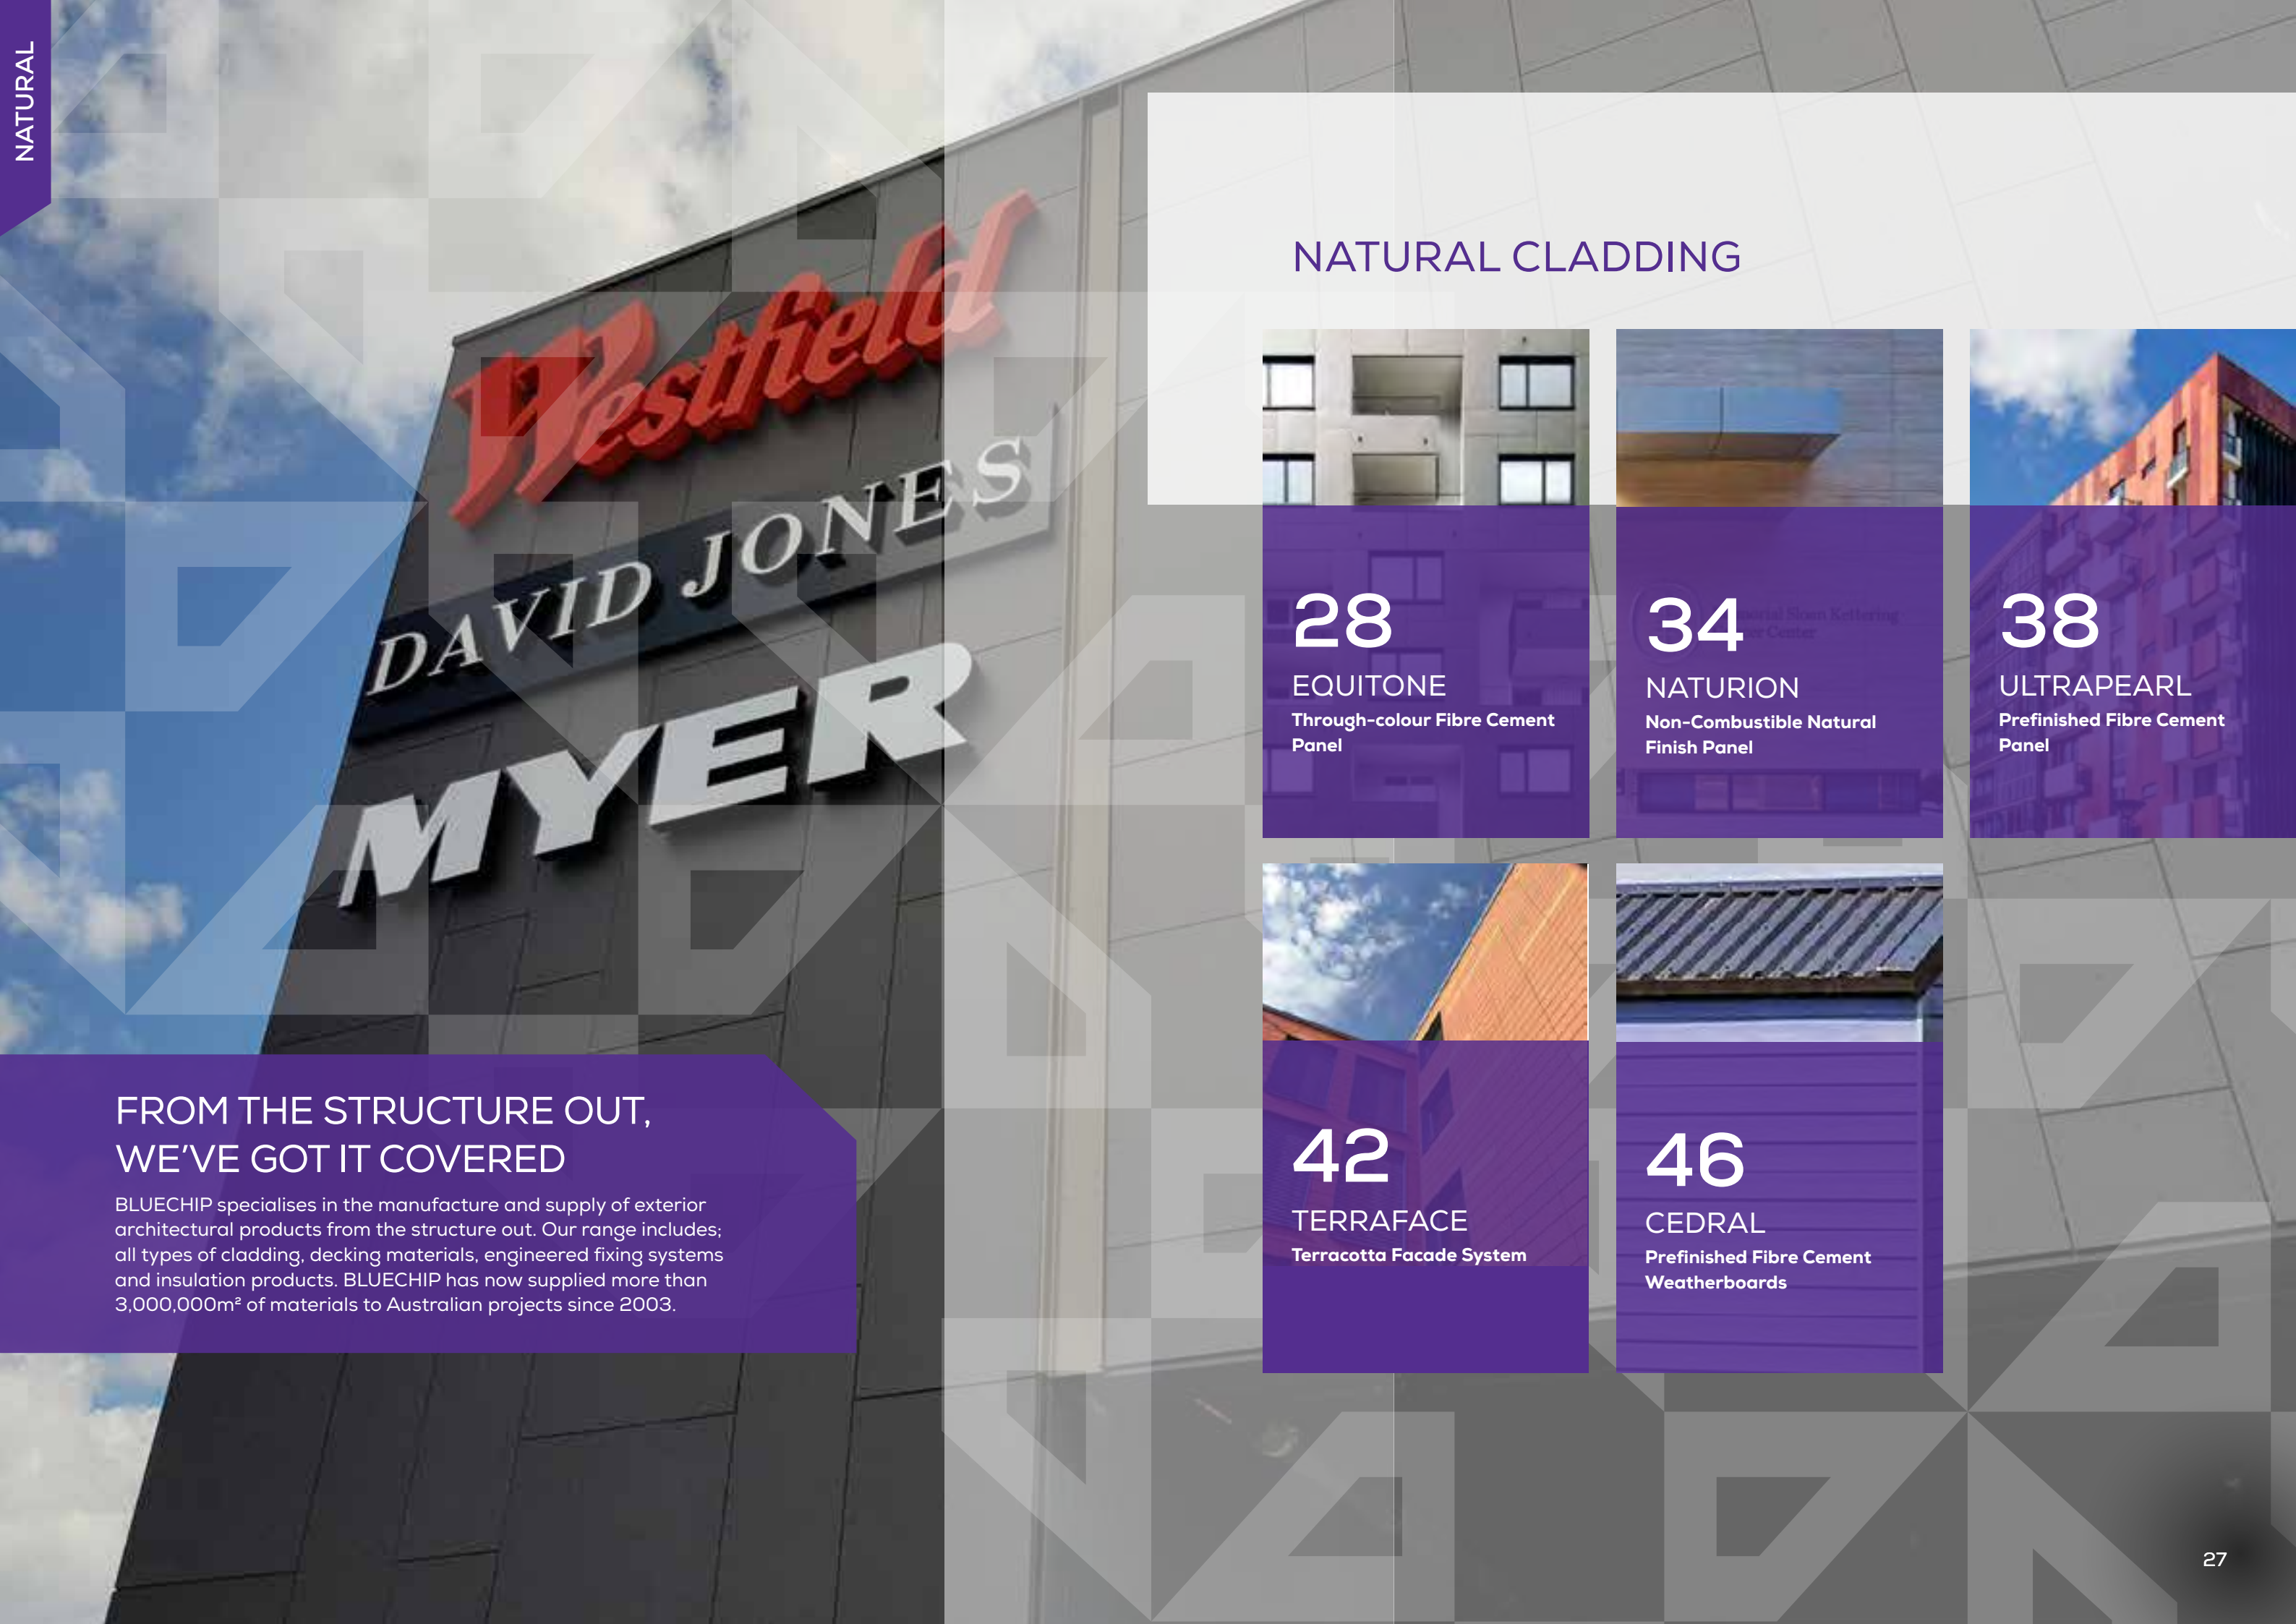

NATURAL CLADDING



28
EQUITONE
Through-colour Fibre Cement
Panel



34
NATURION
Non-Combustible Natural
Finish Panel



38
ULTRAPEARL
Prefinished Fibre Cement
Panel



42
TERRAFACE
Terracotta Facade System



46
CEDRAL
Prefinished Fibre Cement
Weatherboards

FROM THE STRUCTURE OUT,
WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.




EQUITONE

Through-Colour Fibre Cement Panel


Description

EQUITONE is a through-coloured fibre cement cladding designed by and for architects. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material. Fibre cement is a cement composite material that consists of cement, cellulose and mineral materials, reinforced by a visible matrix. Nothing else. Visible and invisible fixing methods include riveting, screwing and bonding on metal or wood supporting frames. No matter what design options you explore, the through-coloured nature of EQUITONE assures crisp, monolithic details in a wide range of unique finishes.


Product Benefits




THROUGH-COLOUR MATERIAL
EQUITONE through-colour fibre cement cladding offers elegant shades of natural colour. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material.




NON-COMBUSTIBLE
EQUITONE through-colour fibre cement cladding is a non-combustible facade material that can be used internally or externally wherever a non-combustible material is required.




EASY TO CUT & INSTALL
EQUITONE through-colour fibre cement cladding is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.




LOCAL STOCK AVAILABLE
EQUITONE through-colour fibre cement cladding is readily available with over 10 colours in stock Australia wide. Please contact us to confirm the stock range and current available sheet sizes.




REPELS WATER
EQUITONE cladding receives a hydrophobation process which prevents moisture ingress into the core of the panel. This allows the completely raw panel to be exposed to the elements without any treatment.



MAINTENANCE FREE
EQUITONE through-colour fibre cement cladding is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.



HIGH DURABILITY
EQUITONE through-colour fibre cement cladding is an exceptionally durable panel. Even in the most demanding applications EQUITONE has a life expectancy exceeding 50 years.



VENTILATED SYSTEM
EQUITONE cladding is installed on a ventilated sub-construction system allowing for the building envelope to breathe which increases thermal and energy efficiency and promotes healthier buildings.

Product Range



EQUITONE Tectiva Finish



EQUITONE Natura Finish



EQUITONE Lines Finish



EQUITONE Materia Finish



EQUITONE Pictura Finish

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
EQUITONE Tectiva TE90, TE00, TE10, TE60, TE15, TE20	2500, 3050 x 1220mm	Stock	1 Sheet
EQUITONE Tectiva TE30, TE40	2500, 3050 x 1220mm	14-16 Weeks	30 Sheets
EQUITONE Natura N211, N252, N251, N073	2500, 3050 x 1220mm	Stock	1 Sheet
EQUITONE Natura N154, N161, N991, N593, N412, N250, N074	2500, 3100 x 1250mm	2-3 Weeks	1 Sheet
EQUITONE Natura All Other Colours	2500, 3100 x 1250mm	14-16 Weeks	30 Sheets
EQUITONE Lines	2500, 3050 x 1220mm	2-3 Weeks	1 Sheet
EQUITONE Materia & Pictura	2500, 3100 x 1250mm	14-16 Weeks	50 Sheets

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
EQR***	EQUITONE Uni Rivet (Insert Colour), 100 Pack	Stock	1 Pack
EQR***	EQUITONE Uni Rivet (Insert Colour), 250 Pack	Stock	1 Pack
EQUFPS	EQUITONE Uni Rivet Fixed Point Sleeve, 100 Pack	Stock	1 Pack
EQU***	EQUITONE Uni Timber Screw (Insert Colour), 250 Pack	3-4 Weeks	1 Pack
EQUSS	EQUITONE Uni Screw Sleeve, 250 Pack	3-4 Weeks	1 Pack
EQLUK1	LUKO 1 Litre Edge Sealer (Natura Only)	Stock	1 Can

System Components



PAGE 92
FIRESPAN AS 1530.1 Sarking



PAGE 94
SINIAT WD Rigid Air Barrier



PAGE 106
STUDTEK Steel Sub-framing



PAGE 108
NVELOPE Aluminium Framing



PAGE 119
TOOLS Specialist Tools

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




EQUITONE


Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.


Equitone Tectiva




TE90 White (s)




TE00 Calico (s)




TE10 Natural (s)




TE60 Hessian (s)




TE15 Concrete (s)



TE20 Raw Grey (s)




TE30 Sandstorm




TE40 Sahara


Equitone Natura




N164 White




N162 Chalk Grey




N154 Cream White




N861 Tawny Hue




N961 Ecru




N161 Pale Mist




N163 Soft Grey




N211 Classic Grey




N252 Ash Grey




N891 Beach Stone




N892 Fossil Grey




N250 Natural Grey




N294 Portland




N281 Nimbus



N251 Anthracite




N073 Charcoal




N074 Obsidian


Equitone Natura (Special Colours)




N661 Muted Yellow




N662 Summer Haze




N593 Green Mist




N594 Jadeite Green




N411 Sea Mist




N412 Blue Grey




N991 Autumn Dusk



N972 Sepia



N331 Agate Red



N359 Ruby

Equitone Lines



LT20 Raw Grey




LT60 Hessian



LT90 White

Equitone Materia



MA200 Grey Mist



MA400 Storm Grey

EQUITONE

Colour Chart

Equitone Pictura

							
PW141 Porcelain	PW841 Parchment	PG843 Fawn Grey	PG243 Moonstone	PG241 Gunmetal Grey	PG844 Mocha	PA944 Espresso	PA041 Matt Black
							
PG542 Olive	PG642 Antique Yellow	PG641 Powder Yellow	PG742 Pale Orange	PG341 Volcanic Red	PG342 Deep Purple	PG444 Navy Blue	PG443 Regency Blue
							
PG442 Sky Blue	PG544 Bright Green	PG545 Autumn Green	PG546 Teal				




NATURION

Non-combustible Natural Finish Panel


Description

NATURION non-combustible natural-finish panel is a revolutionary and innovative new facade material developed with architects and designers in mind. Due to Australia's strict fire compliance standards, it has become increasingly difficult to use natural timber cladding panels whilst meeting non-combustibility requirements. NATURION solves this problem by providing the rich natural warmth of timber, stone and rusted metal panels while at the same time being light-weight, highly durable, prefinished and most importantly Deemed-to-Satisfy non-combustible in accordance with NCC 2019 spec. C1.9(e).


Product Benefits




NON-COMBUSTIBLE
Unlike almost all other timber looking panels such as plywood and high pressure laminate, NATURION natural-finish panels are Deemed-to-Satisfy non-combustible in accordance with NCC 2019.




AUTHENTIC AESTHETICS
Available in an inspiring range of natural timber, stone and rusted metal finishes, NATURION offers beautiful natural aesthetics without compromising on durability, low maintenance or fire compliance.




EASY TO CUT & INSTALL
NATURION non-combustible natural-finish panel is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.




HIGH DURABILITY
NATURION non-combustible natural-finish panel is a highly durable material offering exceptional impact, abrasion and graffiti resistance and making it ideal for both public and private sector projects.




ENVIRONMENTALLY FRIENDLY
Manufactured in Europe to strict environmental standards, NATURION has an A1+ classification for volatile substance emissions and is made of organic natural materials for long-term sustainability.



15 YEAR WARRANTY
With a factory applied impervious matt-finish, NATURION provides outstanding resistance to UV radiation, extreme temperatures, fungi, mould, staining etc and it is backed up with a 15yr warranty.



MAINTENANCE FREE
NATURION non-combustible natural-finish panel is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.



PROPRIETARY SYSTEM
NATURION non-combustible natural-finish panel is installed on a proprietary ventilated sub-frame facade system using either visible colour-matched fasteners or a concealed secret-fix system.

Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
NATURION 8mm Timber Decors	3200 x 1200mm	10-12 Weeks	100m²
NATURION 8mm Material Decors	3200 x 1200mm	10-12 Weeks	100m²
NATURION 8mm Stone Decors	3200 x 1200mm	10-12 Weeks	100m²

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
EQLUK1	LUKO 1 Litre Edge Sealer (Apply to all cut edges)	Stock	1 Can

System Components



INSTALL & TECHNICAL


For installation and technical information, scan the QR code and view 'Downloads' tab.



NATURION

Colour Chart

Timber Decors

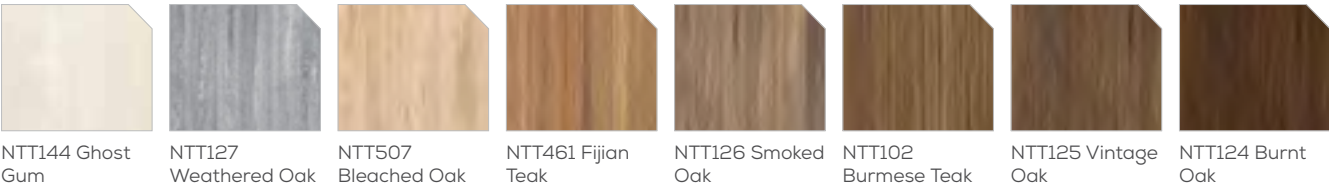

Material Decors



Stone Decors






ULTRAPEARL

Prefinished Fibre Cement Panel


Description

ULTRAPEARL prefinished fibre cement (formerly Vitrafinish) is a 9mm fibre cement facade panel which is prefinished with a highly durable factory applied 2-pack fluoropolymer paint system in unlimited colours and installed to a steel framing system with colour matched screws or rivets. It can be supplied cut-to-size and offers all the benefits of the raw fibre cement board such as impact resistance and non-combustibility. ULTRAPEARL prefinished fibre cement is proudly manufactured in Australia and provides building owners with outstanding life-cycle cost savings and a 15 year coating warranty.


Product Benefits




V700 FLUOROPOLYMER
The ULTRAPEARL prefinished fibre cement coating has a unique thermosetting factory finish that withstands long-term exposure to extreme climate conditions providing lifetime resilience.




UNLIMITED CUSTOM COLOURS
Along with our huge range of standard colours, ULTRAPEARL prefinished fibre cement can be supplied in any custom colour that suits your project. The limit is your imagination.




ACOUSTIC RATED
ULTRAPEARL prefinished fibre cement has high acoustic ratings which enhances sound proofing for buildings such as airports, public train stations, schools, universities and hospitals.




15 YEAR WARRANTY
ULTRAPEARL prefinished fibre cement is so confident in the superior quality of its paint system it offers a 15 year coating warranty for peace of mind and guaranteed quality.




GRAFFITI RESISTANT
ULTRAPEARL prefinished fibre cement is graffiti and chemical resistant allowing quick and easy removal without harming the coating. An ideal solution for educational and public area buildings.



PROVEN PERFORMANCE
The coating system used on ULTRAPEARL prefinished fibre cement has been used on facades through-out Australia and the world for decades. Specify ULTRAPEARL with 100% confidence.



CUT TO SIZE
ULTRAPEARL prefinished fibre cement is supplied cut to size for fast installation once onsite. All edges receive the same high quality coating as the surface receives.



NON-COMBUSTIBLE
ULTRAPEARL prefinished fibre cement is a non-combustible facade material that can be used internally or externally wherever a non-combustible material is required in accordance with BCA/NCC.

Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRAPEARL Standard Sizes	1800, 2400, 3000 x 900mm 1800, 2400, 2700, 3000 x 1200mm	3-5 Weeks	1 Sheet
ULTRAPEARL Custom Shapes & Sizes	Up to 3000 x 1200mm	4-6 Weeks	1 Sheet

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
UPWFR30	ULTRAPEARL 30mm x 10-16 Wafer (Colour), 1000 Pack	3-4 Weeks	1 Pack
BCNFW	ULTRAPEARL 8mm Nylon Facade Washer, 1000 Pack	Stock	1 Pack

System Components



INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRAPEARL

Colour Chart

Metallic Colours

							
UP9701 White Pearlcoat	UP9003 Sandblasted Silver	UP6805 Light Sage	UP9001 Champagne	UP9005 Medium Bronze	UP9602 Light Copper	UP9702 Emperors Gold	UP6706 Tangerine
							
UP3406 Tropicana	UP3401 Atlantis Blue	UP3404 Deep Periwinkle	UP6703 Cobalt Blue	UP9601 Royal Green	UP9002 Mineshaft		

Solid Colours


							
UP9016 Traffic White	UP9010 Pure White	UP1013 Oyster White	UP1015 Light Ivory	UP1014 Ivory	UP7044 Silk Grey	UP7030 Stone Grey	UP7005 Mouse Grey
							
UP9002 Grey White	UP7035 Light Grey	UP7004 Signal Grey	UP7000 Squirrel Grey	UP7011 Iron Grey	UP7016 Anthracite Grey	UP7022 Umbra Grey	UP9005 Jet Black
							
UP6019 Pastel Green	UP6021 Pale Green	UP6018 Yellow Green	UP6037 Pure Green	UP6029 Mint Green	UP6026 Opal Green	UP6005 Moss Green	UP6003 Olive Green

Solid Colours Cont'd

							
UP5024 Pastel Blue	UP5023 Distant Blue	UP5015 Sky Blue	UP5021 Water Blue	UP5019 Capri Blue	UP5002 Ultramarine Blue	UP5008 Grey Blue	UP5011 Steel Blue
							
UP1016 Sulfur Yellow	UP1018 Zinc Yellow	UP1023 Traffic Yellow	UP1037 Sun Yellow	UP8008 Olive Brown	UP8028 Terra Brown	UP8019 Grey Brown	UP4007 Purple Violet
							
UP1017 Saffron Yellow	UP2003 Pastel Orange	UP2004 Pure Orange	UP2002 Vermillion	UP3020 Traffic Red	UP3001 Signal Red	UP3003 Ruby Red	UP3005 Wine Red



UNLIMITED CUSTOM COLOURS
ULTRAPEARL has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.

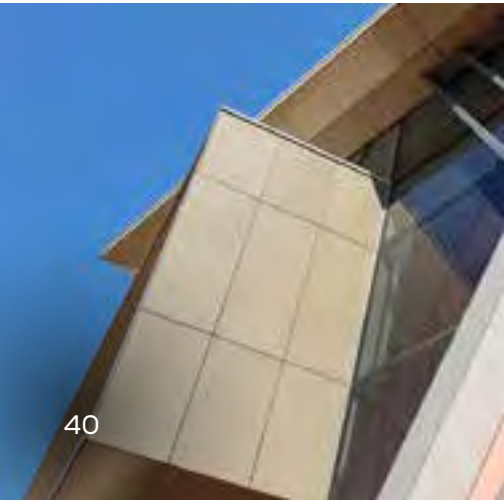


TERRAFACE

Terracotta Facade System


Description

TERRAFACE terracotta cladding tiles and sunscreen battens (formerly Argeton) are manufactured in Europe by one of the largest clay block, brick and roof tile manufacturers in the world. Enriching new and modern buildings, TERRAFACE terracotta cladding tiles also impart an exclusive contemporary character to refurbished properties. Combined with steel, wood or glass, it is elegant, natural and looks effective for decades. The high strength of the TERRAFACE terracotta cladding and its fixing system make the system particularly suitable for use on public buildings, e.g. schools, and other high stress areas.


Product Benefits




HIGH DURABILITY
TERRAFACE terracotta cladding tiles are one of the first ceramic facade systems to have passed the test for ball throwing safety in accordance with DIN18632-3.




FULL WARRANTY
TERRAFACE terracotta cladding offers a 10 year warranty and is backed by global giant Wienerberger, who are the largest manufacturer of bricks in the world.




PRECISION MANUFACTURING
The high precision dimensioning of TERRAFACE terracotta cladding tile plates is achieved by a special calibrating facility, the essential element of the precise joints which gives a facade its overall impression.




NATURAL AESTHETICS
Enriching new and refurbished buildings, TERRAFACE terracotta cladding imparts an exclusive contemporary character to all projects. It is elegant, natural and looks effective for decades.




NON-COMBUSTIBLE
TERRAFACE terracotta cladding is a non-combustible facade material that can be used internally or externally wherever a non-combustible material is required.



CONCEALED FIX SYSTEM
The high strength of the TERRAFACE terracotta cladding tiles and its concealed fixing system make the facade particularly suitable for use on public buildings, e.g. schools, and other high stress areas.



HIGH ACOUSTIC RATING
The additional noise insulation of the building by the TERRAFACE terracotta cladding reduces air-carried sound by approx. 9 dB, depending on type of application.













VENTILATED FACADE SYSTEM
TERRAFACE terracotta cladding is installed on a ventilated sub-construction system allowing for the building envelope to breathe which increases thermal and energy efficiency.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Profiles

	Specification Code: UT18 TERRAFACE 300 x 18
	Specification Code: UT18 TERRAFACE 400 x 18
	Specification Code: UT22 TERRAFACE 250 x 22
	Specification Code: UT22 TERRAFACE 300 x 22
	Specification Code: UT22 TERRAFACE 400 x 22
	Specification Code: UT22 TERRAFACE 500 x 22
	Specification Code: USS55 TERRAFACE Sunscreen
	Specification Code: USC50 TERRAFACE Sunscreen
	Specification Code: USR*** TERRAFACE Sunscreen
	Specification Code: USE*** TERRAFACE Sunscreen

Availability

DESCRIPTION	TILE SIZES	LEAD TIME	MOQ
TERRAFACE UT18 Terracotta Tile	300, 400 x 600, 900, 1200mm	14-16 Weeks	100m²
TERRAFACE UT22 Terracotta Tile	250, 300, 400, 500 x 600, 900, 1200, 1500mm	14-16 Weeks	100m²
TERRAFACE USS Square Sunscreen	55 x 55mm x 250-1500mm	14-16 Weeks	100m²
TERRAFACE USC Circular Sunscreen	50mm Diametre x 250-1500mm	14-16 Weeks	100m²
TERRAFACE USR Rectangular Sunscreen	110 x 55mm x 250-1500mm 200 x 55mm x 250-1500mm	14-16 Weeks	100m²
TERRAFACE USE Elliptical Sunscreen	150 x 50mm x 250-1400mm 250 x 60mm x 250-1400mm	14-16 Weeks	100m²



Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
UTTC**	TERRAFACE Tile Clip with Rubber Gasket, Pack 100	14-16 Weeks	1 Pack
UTVJP	TERRAFACE Vertical Joint Profile, 5.8m Length	14-16 Weeks	1 Length
UTHR**	TERRAFACE Horizontal Carrier Rail, 5.8m Length	14-16 Weeks	1 Length
US*SSB	TERRAFACE Sunscreen Support Bracket (Insert Profile)	14-16 weeks	1 Bracket
US*SJG	TERRAFACE Sunscreen Joint Gasket (Insert Profile)	14-16 Weeks	1 Gasket

TERRAFACE

Colour Chart







Natural Colours

						
TFNF55 Natural White	TFNF37 Natural Gris	TFNF36 Natural Blanco	TFNF33 Natural Terracotta	TFNF38 Natural Tabaco	TFNF39 Natural Negra	TFNF41 Natural Marfil

Glazed Colours

							
TFGF21 Glazed Nieve	TFGF05 Glazed Ibiza	TFGF29 Glazed Kuwait	TFGF30 Glazed Corea	TFGF28 Glazed Milan	TFGF23 Glazed Albero	TFGF03 Glazed Arena	TFGF01 Glazed Aldonza
							
TFGF13 Glazed Terracotta	TFGF14 Glazed Serna	TFGF11 Glazed Tabaco	TFGF04 Glazed Gris	TFGF32 Glazed Miro	TFGF17 Glazed Marengo	TFG105 Glazed Barcelona	TFGF20 Glazed Celeste
							
TFGF19 Glazed Turquesa	TFGF24 Glazed Palido Verde	TFGF44 Glazed Claro Verde	TFGF45 Glazed Verde	TFGF46 Glazed Oscuro Verde	TFGF02 Glazed Antracita	TFGF16 Glazed Grafito	TFGF35 Glazed Argel
							
TFGF56 Glazed Rojo Mate	TFGF25 Glazed Rojo						



Timber Imitations

					
TFTF54 Timber Roble	TFTF31 Timber Nogal	TFTF51 Timber Tundra	TFTF50 Timber Taiga	TFTF49 Timber Samara	TFTF48 Timber Volga

Stone Imitations

							
TFSF26 Stone Blanco	TFSF54 Stone Zarauz	TFSF53 Stone Bermeo	TFSF06 Stone Crema	TFSF12 Stone Oro	TFSF27 Stone Rojo	TFSF15 Stone Gris	TFSF09 Stone Negra

Metal Imitations

	
TFMF07 Metal Cobre	TFMF08 Metal Platino






CEDRAL

Prefinished Fibre Cement Weatherboards


Description

CEDRAL is the ideal low maintenance, rot free, alternative to traditional paint onsite weatherboard. We believe in beautiful, lasting homes. That’s why we offer beautiful weatherboards that exceed the highest standards. For a home with a perfect finish that will last a lifetime, CEDRAL prefinished fibre cement combines the best of science and nature. It is an environmentally-friendly material made of wood, cellulose, sand, synthetic fibres and water. Then it is pre-finished to create a strong and high-performance weatherboard that adds value to your home. Hard as stone & as easy as wood.


Product Benefits




NON-COMBUSTIBLE
CEDRAL prefinished weatherboards are deemed non-combustible according to the BCA/NCC 2019 Clause C1.9(e)(iv) and can be used anywhere a non-combustible cladding is required.




EASY TO CUT & INSTALL
CEDRAL prefinished weatherboards are easily cut to size and installed either off-site to transportable buildings or onsite to traditional buildings. No painting is required saving time and money.




BAL-FZ RATING
Deemed non-combustible, CEDRAL can be used in the most extreme bushfire zones including the most dangerous FZ zone to create safe, beautiful and maintenance free homes.




VENTILATED SYSTEM
CEDRAL prefinished weatherboards are installed on a ventilated batten system allowing for your home to breathe, increasing thermal and energy efficiency and promoting healthier buildings.




LIGHT WEIGHT
CEDRAL has a layered production and fibre matrix supporting the cement. This makes it thinner than concrete but with the same performance benefits such as strength and durability.



DIMENSIONAL STABILITY
Thanks to its excellent thermal stability, CEDRAL will not warp or crack under high temperatures during summer months and it is freeze resistant in accordance with AS 2908.2.




LOW MAINTENANCE
CEDRAL prefinished weatherboards are extremely pest resistant and they don’t rot meaning they last much longer than traditional weatherboards with no onsite treatment or painting.




HIGH DURABILITY
CEDRAL is resistant to all kinds of weather, from high heat and direct sunlight to severe frosts and torrential rain. It has a minimum life expectancy of 50 years in most environments.

Profiles



Specification Code: CL*** CEDRAL Lap Profile



Specification Code: CC*** CEDRAL Click Profile

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
CLW01	CEDRAL 190 x 10mm Lap Woodgrain White, 3.6m Length	2-3 Weeks	1 Length
CLW07	CEDRAL 190 x 10mm Lap Woodgrain Cream White, 3.6m	2-3 Weeks	1 Length
CLW05	CEDRAL 190 x 10mm Lap Woodgrain Grey, 3.6m Length	2-3 Weeks	1 Length
CCS01	CEDRAL 186 x 12mm Click Smooth White, 3.6m Length	2-3 Weeks	1 Length
CCS07	CEDRAL 186 x 12mm Click Smooth Cream White, 3.6m	2-3 Weeks	1 Length
CCS05	CEDRAL 186 x 12mm Click Smooth Grey, 3.6m Length	2-3 Weeks	1 Length
CL***	CEDRAL 190 x 10mm Lap All Other Colours, 3.6m Length	10-12 Weeks	100 Lengths
CC***	CEDRAL 186 x 12mm Click All Other Colours, 3.6m Length	10-12 Weeks	100 Lengths
CTU**	CEDRAL Touch-up Paint (insert Colour), 500ml Can	2-3 Weeks	1 Can
CCCTS	CEDRAL Click Secret Fix Clip with Timber Screw, 250 Pack	2-3 Weeks	1 Pack

System Components



PAGE 92
FIRESPAN
AS 1530.1 Sarking



PAGE 106
STUDTEK
Steel Sub-framing



PAGE 109
CLADTRIM
Colour-match Trims



PAGE 117
ADHESIVES
SikaTack & 11FC



PAGE 110
COLOURFIX
Coloured Fixings

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




CEDRAL

Colour Chart

Stock Colours



Non-stock Colours

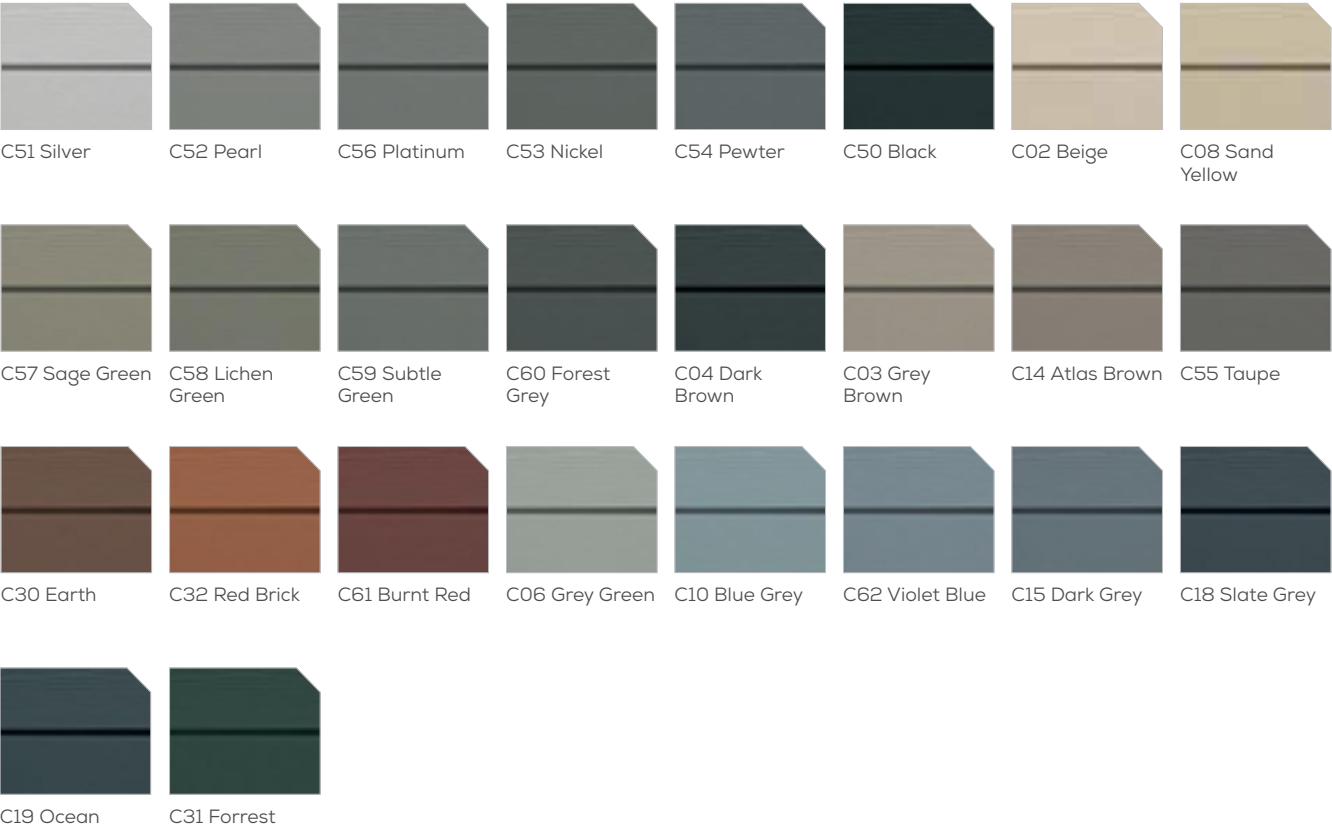



TIMBER CLADDING



52

ULTRAWOOD
Non-combustible Timber
Cladding



58

SELEKTA
Timber Composite Cladding



62

FUNDERMAX
Through-colour Composite
Cladding



68

RITECLAD
Through-colour Composite
Cladding

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.


ULTRAWOOD

Non-combustible Timber Cladding & Battens


Description

ULTRAWOOD is an innovative new generation exterior cladding product made from highly durable marine-grade aluminium and factory pre-finished using the latest matt-effect technology in a wide range of realistic timber colours. Deemed-to-satisfy non-combustible in accordance with the BCA/ NCC, it has been fully tested in Australia by CSIRO achieving excellent results to AS 1530.1 and AS 1530.3. Eco-friendly, low maintenance and incredibly durable, ULTRAWOOD is ideal for type A and B construction projects such as high rise apartments and bushfire rated areas which require non-combustible cladding.


Product Benefits




AS 1530.1 NON-COMBUSTIBLE
ULTRAWOOD is a non-combustible cladding product in accordance with the relevant requirements of the NCC/BCA and has been tested by NATA accredited CSIRO to AS 1530.1 and AS 1530.3.




MARINE GRADE DURABILITY
Along with the marine-grade aluminium base material, the matt-effect ULTRAWOOD coating has undergone extensive durability testing and has been proven to perform in the harsh Australian conditions.




INTELLIGENT PROFILE
The ULTRAWOOD profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has one single swarf-free contact point for superior consistency and weather-proofing.




EASY INSTALLATION
Supplied in custom lengths, ULTRAWOOD has 155mm cover per board making it fast and easy to install to a simple sub-frame at 600mm centres using secret-fix screws and a colour-matched trim system.




VERY LIGHT-WEIGHT
Compared to many other timber cladding products, ULTRAWOOD is a very light-weight system weighing only 8.75kg per square metre offering potential structural advantages and cost savings.



MANUFACTURER'S WARRANTY
Despite the undisputed durability of high-grade aluminium, ULTRAWOOD cladding offers a 10yr manufacturer's warranty on all different finishes for peace of mind and guaranteed performance.




NATURAL AESTHETICS
The beautiful looking finish on the ULTRAWOOD boards is possible because the latest matt-effect coating technology provides incredible richness and variation along with outstanding long-term durability.




COLOUR-MATCHED TRIMS
The ULTRAWOOD system is completed using the CLADTRIM click-together trim system covering all common construction details and finished in exactly the same matt-effect coating for a perfect match.


Profiles




Specification Code: UW*G ULTRAWOOD Groove Profile




Specification Code: UW*C ULTRAWOOD Cabin Cladding

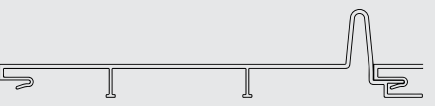


Specification Code: UW*S ULTRAWOOD Seam Cladding




Specification Code: UW*B5050 ULTRAWOOD 50 x 50 Batten




Specification Code: UW*B10050 ULTRAWOOD 100 x 50 Batten




Specification Code: UW*B15050 ULTRAWOOD 150 x 50 Batten



Specification Code: UW*B20050 ULTRAWOOD 200 x 50 Batten



Specification Code: UW*B25050 ULTRAWOOD 250 x 50 Batten



Specification Code: UW*B30050 ULTRAWOOD 300 x 50 Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
UW*G15518	ULTRAWOOD 155 x 18mm Groove (Colour), 6.5m Length	2-3 Weeks	1 Length
UW*C20530	ULTRAWOOD 205 x 30mm Cabin (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UW*S20548	ULTRAWOOD 205 x 48mm Seam (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UW*BXXX50	ULTRAWOOD XXX x 50mm Batten (Colour), 6.5m Length	2-3 Weeks	1 Length
UWEXXX50	ULTRAWOOD XXX x 50mm Batten End Cap (Colour)	2-3 Weeks	1 End Cap

(*) Indicates different finish options. U for Ultrawood Timber Colours and P for Powdercoat Colours

System Components

PAGE 92



FIRESPAN
AS 1530.1 Sarking

PAGE 106



STUDEK
Steel Sub-framing

PAGE 109



CLADTRIM
Colour-match Trims

PAGE 117



ADHESIVES
SikaTack & 11FC

PAGE 110



COLOURFIX
Coloured Fixings

INSTALL & TECHNICAL







































For installation and technical information, scan the QR code and view 'Downloads' tab.















ULTRAWOOD

Colour Chart

Ultrawood Colours

							
UW0123 Alabama White	UW1560 White Birch	UW1902 Smoke Bush	UW0903 Ivory Coast	UW0816 Hoop Pine	UW0820 Cedar	UW1318 Mallee Root	UW1570 Silver Oak
							
UW0502 European Beech	UW0523 English Willow	UW2015 Tasmanian Oak	UW0813 Honey Maple	UW0120 African Teak	UW1816 Rustic Pine	UW1315 Miry Oak	UW0402 Dusty Balso
							
UW1520 White Oak	UW0103 Alaskan Cedar	UW1703 Queensland Cedar	UW1510 Meranti	UW2503 Yukon Cedar	UW2203 Vancouver Cedar	UW0202 Bowral Bluegum	UW1410 Nannup Jarrah
							
UW1301 Manuka	UW0302 Coastal Blackwood	UW0515 English Oak	UW2311 Woodstock	UW1403 Native Cherry	UW1540 Dark Cedar	UW0220 Burmese Teak	UW1809 Red Iroko
							
UW1907 Banjo Gum	UW1813 Rich Mahogany	UW1102 Khaya Bean	UW1523 Old Walnut	UW0223 Black Wenge	UW1580 African Ebony		

Anodised Colours

							
UL0104 Asteroid	UL0320 Comet Trail	UL1225 Light Year	UL1305 Moonshine	UL1207 Lunar Glow	UL1914 Scintillation	UL0110 Astro Journey	UL0925 Infinity
							
UL1919 Solar Storm	UL0314 Constellation	UL1519 Orion Sky	UL1904 Stellar Distance				

Powdercoat Excel Colours


							
GA029A Pearl White Gloss	GD230A Domain Matt	GD031A Primrose Gloss	GD245A Classic Cream Matt	GA236A Surfmist Matt	GM235A Evening Haze Matt	GL284A Shale Grey Matt	GL252A Dune Matt
							
GD215A Harvest Matt	GD214A Paperbark Matt	GM242A Gully Matt	GM214A Jasper Matt	GG219A Headland Matt	GG262A Manor Red Matt	GM234A Terrain Matt	GL205A Woodland Matt
							
GM204A Riversand Matt	GL266A Windspray Matt	GP208A Basalt Matt	GL236A Ironstone Matt	GK203A Bushland Matt	GL210A Wallaby Matt	GJ203A Deep Ocean Matt	GL229A Monument Matt
							
GD274A Cove Matt	GK236A Pale Eucalypt Matt	GK298A Wilderness Matt	GK277A Mangrove Matt	GK274A Cottage Green Matt	GK030A Hawthorn Green Gloss	GK044A Heritage Green Gloss	GL035A Charcoal Gloss
							
GN231A Night Sky Matt							



ULTRAWOOD

Colour Chart

Powdercoat Living Colours



GA030A Bright White Gloss



GA124A White Satin




GA078A Pearl White Gloss



GA160A Shoji White Satin



GA057A White Birch Gloss




GA211A Off White Matt



GL258A Oyster Grey Matt



GL107A APO Grey Satin



GD037A Primrose Gloss



GD025A Magnolia Gloss



GD016A Almond Ivory Gloss



GD188A Doeskin Satin



GD042A Rivergum Gloss



GD007A Barley Gloss



GD247A Stone Beige Matt



GM175A Pottery Satin



GL060A Storm Grey Gloss



GL175A Olde Pewter Satin



GG142A Claret Satin



GL031A Transformer Grey Gloss



GL040A Notre Dame Gloss



GM100A Hamersley Brown Satin



GL015A Roseberry Grey Gloss



GN063A Coral Black Gloss




GN248A Custom Black Matt




GN150A Black Satin


Powdercoat Vivica Colours




GW003K Mercury Silver Gloss




GL211A Citi Matt




GY070A Ultra Silver Gloss



GY119A Nobel Silver Pearl Satin




GY184C Palladium Silver Pearl Satin




GY270A Asteroid Pearl Matt




GL249A Storm Front Matt



GY042A Black Onyx Gloss




GY237A Charcoal Pearl Matt




GM019A Charcoal Metallic Gloss

Precis Colours



GY21AA Natural Shimmer Matt



GY20BA Dark Bronze Matt

Powdercoat Anodic Colours



GY221A Anodic Clear Matt



GD227A Anodic Off White Matt



GL237A Anodic Silver Grey Matt



GY235A Anodic Natural Matt



GY276A Anodic Champagne Matt




GY114A Anodic Bronze Satin




GL213A Anodic Dark Grey Matt


Powdercoat Sable Colours




GL320A Sable Grey Nurse




GY301A Sable Silver




GL277A Sable Brilliance




GN271A Sable Asteroid



GX350A Sable Cor Ten



GN297A Sable Bass



GN341A Sable Black

Powdercoat Ultriva Colours



YA278A Pearl White Matt



YY245A Citi Pearl Matt



YY276A Champagne Pearl Matt



YY223A Anodic Natural Matt



YX207C French Champagne Matt



YY25AA Precis Natural Shimmer Matt



YY22BA Precis Pure Gold Matt



YY20BA Precis Dark Bronze Matt



YN21BA Precis Black Ink Matt



YL264A Monument Matt



YN201A Ebony Matt



YY225A Bronze Pearl Matt



YY366A Sable Medium Bronze



YW100C Eternal Silver Satin



YY377A Sable Brilliance



YY263A Titanium Pearl Matt



YY270A Asteroid Pearl Matt



YY397A Sable Bass



YL238A Charcoal Matt



YY237A Charcoal Pearl Matt

Powdercoat Vitality Colours



GE087A Brilliant Yellow Gloss



GK063A Lycra Strip Gloss



GF049A Sensation Gloss



GG155A Lobster Satin



GK051A Viper Green Gloss



GK043A Shamrock Green Gloss



GJ045A Bondi Blue Gloss



GJ174A Jaybird Satin

SELEKTA

Timber Composite Cladding

Description

Made in Germany, SELEKTA timber composite cladding is a unique, prefinished product with a beautiful timber grain embossed surface. Designed for stability and longevity with style, SELEKTA timber composite cladding is eco-friendly, maintenance free and incredibly easy to install. SELEKTA timber composite cladding has been subjected to extreme endurance tests, including swell tests and UV tests. After being subjected to a wide range of extreme environmental conditions and temperature fluctuations between -30° and +70° Celsius, the product responded brilliantly, outlasting wind and weather for 30 years.

Product Benefits



NCC 2019 COMPLIANCE
SELEKTA timber composite cladding is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.



SECRET FIXING
SELEKTA timber composite cladding comes with a simple tongue and groove fixing system with machined screw slots for ease and speed of installation saving any need for pre-drilling each length.



BAL 29 FIRE RATING
SELEKTA timber composite cladding has been tested to AS fire standards and achieves a BAL 29 fire rating along with excellent group rating as per AS 3837 for exterior cladding.



NON LEACHING
SELEKTA timber composite cladding is the only timber based cladding that cannot leach as there are no tannins impregnated into the profile allowing for a beautiful look that will last.



AS 5113 FIRE TESTING
SELEKTA timber composite cladding has been tested as per the new AS 5113 full-scale facade fire test which is required for CV3 performance based solutions on all type A & B construction.



ACOUSTIC RATING
Laboratory acoustic testing results are available. SELEKTA timber composite cladding is the perfect material to use on multi-residential high density developments to improve acoustics.




MAINTENANCE FREE
SELEKTA timber composite cladding is guaranteed not to rot, split, warp or check. Highly resistant to damage caused by termites and fungal decay and does not need any on-going sealing, oiling or re-painting.



FULL WARRANTY
SELEKTA timber composite cladding comes with a comprehensive 10 year warranty backed by the German based manufacturer. Guaranteed quality and peace of mind for your project.

Profile



Specification Code: SK**** SELEKTA 155 x 18

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SK1560	SELEKTA 155 x 18mm White Birch, 5.4m Length	Stock	1 Length
SK0820	SELEKTA 155 x 18mm Cedar, 5.4m Length	Stock	1 Length
SK1520	SELEKTA 155 x 18mm White Oak, 5.4m Length	Stock	1 Length
SK1570	SELEKTA 155 x 18mm Silver Oak, 5.4m Length	Stock	1 Length
SK1540	SELEKTA 155 x 18mm Dark Cedar, 5.4m Length	Stock	1 Length
SK1510	SELEKTA 155 x 18mm Meranti, 5.4m Length	Stock	1 Length
SK1580	SELEKTA 155 x 18mm African Ebony, 5.4m Length	Stock	1 Length
SKMISC	All Other Colours are Supplied to Order, 5.4m Lengths	10-12 Weeks	288 Lengths
SKS****	SELEKTA Touch-up & End-sealer (Insert Colour)	Stock	1 Can

System Components



PAGE 92
FIRESPAN
AS 1530.1 Sarking



PAGE 106
STUDEK
Steel Sub-framing



PAGE 109
CLADTRIM
Colour-match Trims



PAGE 117
ADHESIVES
SikaTack & 11FC



PAGE 110
COLOURFIX
Coloured Fixings

*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



SELEKTA

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Timber Colours



SK1560 White Birch (s)



SK1570 Silver Oak (s)



SK0820 Cedar



SK1520 White Oak (s)



SK1540 Dark Cedar (s)




SK1510 Meranti (s)




SK1580 African Ebony (s)


Solid Colours - Group 1




SK6360 Coast White




SK2150 Cream White




SK6660 Lava White




SK6510 Stone White




SK6710 Ashes White




SK6760 Earth White



SK6810 Dune White




SK6260 Arctic White




SK6370 Soft Coast




SK6270 Soft Arctic




SK6340 Deep Ocean



SK6390 Deep Coast



SK6140 Deep Reed



SK6790 Deep Earth

Solid Colours - Group 2



SK6010 Dawn White



SK6060 Moss White



SK6860 Moon White



SK6170 Soft Fog



SK6090 Deep Moss



SK6310 Polar



SK6210 Sea



SK6320 Soft Ocean



SK6330 Ocean



SK6290 Deep Arctic



SK6450 Sand



SK6580 Canyon



SK6590 Deep Canyon



SK6820 Soft Dune



SK6800 Bright Earth



SK6630 Volcanic



SK6650 Bright Volcanic



SK6400 Royal Red



SK6740 Turf



SK6730 Ashes

FUNDERMAX

High Pressure Laminate Panel

Description

FUNDERMAX Max Exterior F-Quality is a duomer high pressure laminate cladding manufactured in Austria in accordance with EN-438-6 type EDF. It is factory produced using double hardened acrylic PUR resins for excellent consistency and outstanding durability. Produced in a high pressure laminate press under very high temperature, FUNDERMAX high pressure laminate cladding is extremely tough with high resistance to fading, scratching and denting making it ideal for all interior or exterior cladding applications where a low maintenance finish and long-term durability is required.

Product Benefits



GRAFFITI RESISTANT
FUNDERMAX Max Exterior F-quality high pressure laminate cladding has a closed cell surface which prevents inks, paints and other graffiti materials from permanently harming the sheets.



FIRE RATED
FUNDERMAX Max Exterior high pressure laminate cladding has been tested to the Australian Standards by the NATA approved CSIRO achieving excellent results according to AS 3837 & AS 1530.3.



DOUBLE SIDED COLOUR
As standard all FUNDERMAX Max Exterior high pressure laminate cladding comes with the décor on both sides so that each side can be used. If one side is damaged during install simply flip to the other side.



MAINTENANCE FREE
FUNDERMAX Max Exterior high pressure laminate cladding has a very high density surface finish preventing accumulation of any dirt build up allowing for virtually no maintenance if any.



EXTREME DURABILITY
FUNDERMAX Max Exterior high pressure laminate cladding is extremely durable even in the harshest external environments. A project installed in 1978 which was tested 33 years later had little change.



FULL WARRANTY
FUNDERMAX Max Exterior high pressure laminate cladding is backed up with a 10 year warranty. However the life expectancy exceeds 33 years and has been proven to outlast many alternatives.




UV RESISTANT
FUNDERMAX Max Exterior high pressure laminate cladding is colourfast and offer exceptional resistance to UV light. According to EN ISO 4892-3 they are extremely lightfast with very minimal change.



LARGE COLOUR RANGE
FUNDERMAX Max Exterior high pressure laminate cladding is available in a huge range of decors from solid, metallic, timber, metal, concrete, and graphic print options. The limit is your imagination.

Product Range

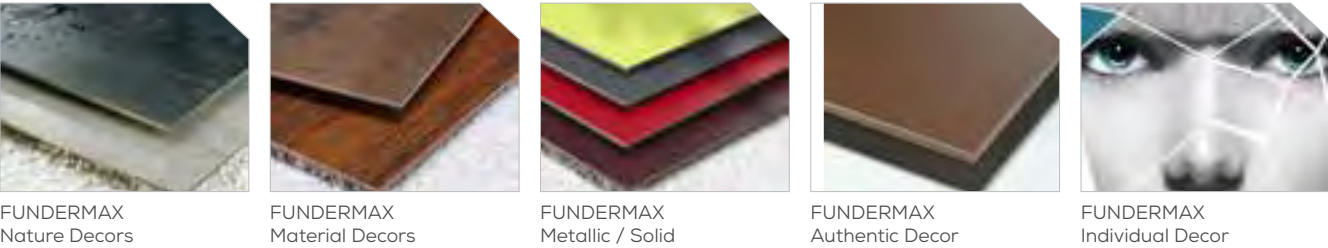

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
FUNDERMAX Nature Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Material Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Metallic & Solid Colours	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Authentic Decor	4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Individual Decor	2800, 4100 x 1300mm	10-12 weeks	1 Sheet

System Components



*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

INSTALL & TECHNICAL


For installation and technical information, scan the QR code and view 'Downloads' tab.



























FUNDERMAX

Colour Chart







Nature Decors

							
FX0919 Ecuador	FX0922 Amazon	FX0601 Sun Pear	FX5171 Polar Oak	FX5172 Marshland Oak	FX5173 Barrique Oak	FX0923 Enigma	FX0924 Taurus
							
FX0935 Voyager	FX0925 Butterfly	FX0926 Jazz	FX0936 Thunder	FX0927 Creek	FX0801 Fir Platinum	FX0803 Tyrol Pine	FX0928 Gold Coast
							
FX0929 Antique	FX0930 Phoenix	FX0931 Akro Almond	FX0161 Light Afro	FX0932 Akro Terra	FX0168 Akro Rust	FX0169 Akro Ruby	FX0160 Dark Afro




Material Decors

							
FX0394 Moonwalk	FX0344 Riverside	FX0426 Loft	FX0156 Afro Patina	FX0798 Tambora	FX0793 Patina Tin	FX0794 Patina Bronze	FX0386 Blues
							
FX0387 Reggae	FX0162 Afro Sahara	FX0158 Afro Grey	FX0159 Afro Black	FX0028 Prado Brown	FX0026 Prado Alu Grey	FX0027 Prado Agate Grey	FX0496 Colosseum
							
FX0497 Stonehenge	FX0421 Venus	FX0406 Rockstar	FX0427 Skyline	FX0428 Cave	FX0429 Corro	FX0480 Kings Cross	FX0481 Satellite







Metallic Colours

					
FX0066G Sand Metallic	FX0768G Sparrow Metallic	FX5032G Cinnamon Metallic	FX0077G Charcoal Metallic	FX0080G Black Metallic	FX0056G Atlantis Metallic

Black, Grey & White

							
FX0085 White	FX0091 Starlight	FX0742 Pebble Grey	FX0741 Birch Grey	FX0074 Pastel Grey	FX0776 Concrete Grey	FX0747 Medium Grey	FX0753 Cool Grey Medium
							
FX0070 Carbon Grey	FX0075 Dark Grey	FX0077 Charcoal	FX0080 Black				

Neon

					
FX6010 Electric	FX6020 Satsuma	FX6030 Candy	FX6031 Berry	FX6040 Grape	FX6050 Pool



FUNDERMAX

Colour Chart

Yellow



FX0687 Maize



FX0647 Golden Yellow



FX0736 Saffron



FX0851 Winter White




FX0065 Ivory




FX0654 Jasmin


Blue




FX0706 Glacier Blue




FX0703 Dove Blue




FX0712 Steel Blue



FX0717 Atlantic Blue




FX0237 Gentian Blue




FX0702 Night Blue


Green




FX0725 Yellowish Green




FX0623 Green




FX0059 Dark Green




FX0592 Kiwi Green




FX0663 Reseda Green




FX0662 Jade Green




FX0591 Fir Green




FX0611 Pale Olive




FX0612 Olive



FX0056 Atlantis




FX0617 Petrol Green




FX0631 Turquoise


Red




FX0674 Mars Red




FX0689 Dark Red




FX3003 Rubinus Red



FX0691 Purple




FX0680 Wine Red




FX3007 Black Red


Brown




FX0645 Tobacco




FX0657 Sepia Brown




FX0768 Sparrow



FX0692 Old Pink




FX0661 Terracotta




FX5032 Cinnamon


Pastel



FX0733 Pale Ivory




FX0066 Sand



FX0073 Hygienic White



FX0627 Hygienic Beige



FX0651 Cream



FX0693 Orchid

Authentic



FXAU Authentic

Individual Decor



FXID Individual Decor




RITECLAD

Through-colour Composite Cladding


Description

Made in USA, RITECLAD wood composite cladding by Rightwood (Formerly Duroclad) is an extra tough, commercial grade composite cladding manufactured using a mixture of virgin and recycled plastic and recycled timber fibres. RITECLAD wood composite cladding offers a highly practical combination of quality, durability and sustainability. It is highly suitable for external use in even the harshest of environments. Contributing to RITECLAD’s outstanding physical properties, is the use of patented technology, which offers superior structural strength and sustainability and increased UV resistance.


Product Benefits




THROUGH-COLOUR MATERIAL
RITECLAD wood composite cladding is an integral board with the colour of the material going right through. Any scratches are very hard to see and can easily be fixed using a wire brush.




HIGH DURABILITY
RITECLAD wood composite cladding is formulated with a mixture of virgin and recycled plastic along with 50% recycled timber fibres. It is an extremely dense and impact resistant product.




MAINTENANCE FREE
RITECLAD wood composite cladding does not require any surface finish at the time of installation and further to this it never requires any oiling, painting or coating over the life of the product.




ROT & PEST RESISTANT
RITECLAD wood composite cladding is guaranteed not to rot, split, warp or check. It is highly resistant to damage caused by termites and fungal decay and ideal for use in termite prone areas.




SECRET FIXING
RITECLAD wood composite cladding has a tongue and groove profile allowing for fast concealed fix installation ensuring no fixings are exposed.



NCC 2019 COMPLIANCE
RITECLAD wood composite cladding is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.




ACOUSTIC RATING
Laboratory acoustic testing results are available. RITECLAD wood composite cladding is the perfect material to use on multi-residential high density developments to improve acoustics.




ENVIRONMENTALLY FRIENDLY
RITECLAD wood composite cladding is formulated with a mixture of virgin and recycled plastic along with 50% wood fibres, which promotes product longevity and environmental friendliness.

*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

Profiles



Specification Code: R*C11524 RITECLAD Cladding



Specification Code: R*S5524 RITECLAD End Stop

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
RGC11524	RITECLAD 115 x 24mm Grey Cladding, 5.4m Length	1-2 Weeks	20 Lengths
RWC11524	RITECLAD 115 x 24mm Walnut Cladding, 5.4m Length	1-2 Weeks	20 Lengths
RGS5524	RITESTOP 55 x 24mm End Stop, 5.4m Length	1-2 Weeks	20 Lengths
RWS5524	RITESTOP 55 x 24mm End Stop, 5.4m Length	1-2 Weeks	20 Lengths
RR****24	Redwood Colour is Supplied to Order, 5.4m Length	12-14 Weeks	160 Lengths

System Components

PAGE 92



FIRESPAN
AS 1530.1 Sarking

PAGE 106



STUDTEK
Steel Sub-framing

PAGE 109



CLADTRIM
Colour-match Trims

PAGE 117



ADHESIVES
SikaTack & 11FC

PAGE 110



COLOURFIX
Coloured Fixings

Ritescreen Colours



Grey



Walnut



Redwood

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.





DECKING PRODUCTS



72

TRAXION

Mineral-fibre Composite Decking



74

RITEDECK

Through-colour Composite Decking



76

RITEBOARD

Heavy Duty Composite Decking



78

RITESCREEN

Through-colour Composite Screening

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

TRAXION

Mineral-Fibre Composite Decking

Description

TRAXION mineral-fibre decking is a giant leap forward in wood-alternative decking. Made in USA, it has the industry's best strength-to-weight ratio, is incredibly stable and doesn't absorb moisture. The durable polymer cap stock won't stain or fade and it provides the highest level slip resistance when tested to Australian standards. The patented technology creates a fiber-like structure inside the material, similar to wood, giving it unmatched strength and the lightweight boards are easy-to-handle on the job site. Quite simply, TRAXION is the best decking material on the market today.

Product Benefits



EXCELLENT SLIP RESISTANCE
TRAXION mineral-fibre decking achieves the highest possible slip rating of P5 when tested to the latest Australian standard AS 4586 meaning it is compliant for use in all applications.



HIGH STRENGTH TO WEIGHT RATIO
Kilo-for-kilo, TRAXION mineral-fibre decking delivers unprecedented strength and much less dense compared to virtually all other composite construction materials



MAINTENANCE FREE
TRAXION mineral-fibre decking contains no cellulose, has no open porosity structure, and is not degraded by common mould enzymes so simply wipe clean at your leisure.



LOW THERMAL EXPANSION
TRAXION mineral-fibre decking has a far lower rate of thermal expansion than other composites. This dimensional stability is a huge advantage in maintaining performance and appearance.



INDUSTRY LEADING WARRANTY
TRAXION mineral-fibre decking comes with the industry's leading warranty offering a 25-year Structural and a 25-year Stain & Fade guarantee backed up by the manufacturer in USA.



NO MOISTURE ABSORPTION
Unlike many other composites, TRAXION mineral-fibre decking absorbs virtually no moisture; immersion testing shows maximum moisture absorption values of less than 0.2%.




EXTREME STRENGTH
TRAXION mineral-fibre decking has exceptional strength due to its oriented internal fibre structure that is a remarkable replication of wood's internal structure.




RESISTANCE TO EVERYTHING
TRAXION mineral-fibre decking is resistant to almost everything including UV, chalking, rot, leaching, cracking, denting, scratching, splintering and insects.

Profiles



Specification Code: T*X14022 TRAXION Secret Fix Decking



Specification Code: T*P14022 TRAXION Pencil Round







Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
T*X14022	TRAXION 140 x 22mm Secret Fix Decking, 5.8m Length	Stock	1 Length
T*P14022	TRAXION 140 x 22mm Pencil Round, 5.8m Length	Stock	1 Length
T*X18522	TRAXION 185 x 22mm Secret Fix Decking, 5.8m Length	10-12 Weeks	36 Lengths
T*P18522	TRAXION 185 x 22mm Pencil Round, 5.8m Length	10-12 Weeks	36 Lengths
T*P9022	TRAXION 90 x 22mm Screening Batten, 5.8m Length	10-12 Weeks	72 Lengths

System Components

PAGE NO.	DESCRIPTION	STOCK	MOQ
Page 111	STOWAWAY Secret Fix Decking Clips & Screws	Stock	1 Pack
Page 111	PROPLUG Colour-matched Decking Screws	Stock	1 Pack
Page 112	STANDARD Galvanised & Stainless Steel Decking Screws	Stock	1 Pack

Colour Chart



TahitiSeychellesCapriMauiKiribatiDominica

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




RITEDECK

Through-colour Composite Decking


Description

Made in USA, RITEDECK timber composite decking by Rightwood (Formerly Durodeck) has most of the attributes of timber with added advantages such as no maintenance, high durability and strength which provide a long-term aesthetically pleasing and cost effective outcome. Contributing to RITEDECK timber composite decking’s outstanding physical properties, is the use of patented Strandex technology which offers superior thermal stability and increased UV resistance. This technology is the secret behind the success of this product in the most extreme Australian conditions.


Product Benefits




THROUGH-COLOUR MATERIAL
RITEDECK timber composite decking is a homogeneous board with the colour of the material going right through. Any scratches are hard to see and can easily be fixed using a wire brush.



DIMENSIONAL STABILITY
Using patented Strandex technology, every strand of wood fibre in RITEDECK decking boards is encased in high-density polyethylene, for minimal movement and superior protection against UV and moisture.




MAINTENANCE FREE
RITEDECK timber composite decking does not require any surface finish at the time of installation and further to this it never requires any oiling, painting or coating over the life of the product.



ROT & PEST RESISTANT
RITEDECK timber composite decking is guaranteed not to rot, split, warp or check. It is highly resistant to damage caused by termites and fungal decay and ideal for use in termite prone areas.




SECRET FIXING
RITEDECK timber composite decking’s preloaded secret fix system STOWAWAY hidden fasteners can be installed in 4 quick and easy steps to achieve a clean finish with no pre-drilling and no visible screws.



WATER RESISTANT
Wood fibres used in the RITEDECK boards are encapsulated in virgin polymers during the manufacturing process using the patented strandex technology, allowing no opportunity for moisture ingress.




COOL UNDERFOOT
RITEDECK timber composite decking stays much cooler underfoot than other decking products including natural hardwood. This makes it much safer for children in barefeet, ideal for around pools and wet areas.




25 YEAR WARRANTY
Backed by the manufacturer in USA, the RITEDECK timber composite decking comes with a 25 year limited warranty which guarantees quality and peace of mind for the life or re-sale of your investment.

Profiles



Specification Code: R*X13524 RITEDECK Secret Fix Decking



Specification Code: R*P13724 RITEDECK Pencil Round

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
RGX13524	RITEDECK 135 x 24mm Grey Secret Fix Decking, 5.4m Length	Stock	1 Length
RWX13524	RITEDECK 135 x 24mm Walnut Secret Fix Decking, 5.4m Length	Stock	1 Length
RGP13724	RITEDECK 137 x 24mm Grey Pencil Round, 5.4m Length	Stock	1 Length
RWP13724	RITEDECK 137 x 24mm Walnut Pencil Round, 5.4m Length	Stock	1 Length
RR****24	Redwood Colour is Supplied to Order, 5.4m Lengths	10-12 Weeks	80 Lengths

System Components

PAGE NO.	DESCRIPTION	LEAD TIME	MOQ
Page 111	STOWAWAY Secret Fix Decking Clips & Screws	Stock	1 Pack
Page 111	PROPLUG Colour-matched Decking Screws	Stock	1 Pack
Page 112	STANDARD Galvanised & Stainless Steel Decking Screws	Stock	1 Pack

Colour Chart



Grey



Walnut



Redwood

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




RITEBOARD

Heavy Duty Composite Decking


Description

RITEBOARD by Rightwood (Formerly Marine Board) is a stunning wood composite decking with superior water and UV resistance that makes it the perfect product for use in building boardwalks, marinas, boat docks, jetties and other waterfront structures. Produced in USA using patented extrusion technology, RITEBOARD will look great and perform well years after real wood has needed replacing many times over. These benefits along with low maintenance and spanning capabilities of up to 600mm between joists make it the ideal product for heavy duty high traffic areas.


Product Benefits




THROUGH COLOURED
RITEBOARD heavy duty composite decking is an integral board with the colour of the material going right through. Any scratches are very hard to see and can easily be fixed using a wire brush.




ROT & PEST RESISTANT
RITEBOARD heavy duty composite decking is guaranteed not to rot, split, warp or check. It is highly resistant to damage caused by termites and fungal decay and ideal for use in termite prone areas.




MAINTENANCE FREE
RITEBOARD heavy duty composite decking does not require any surface finish at the time of installation and further to this it never requires any oiling, painting or coating over the life of the product.




WATER RESISTANT
All RITEBOARD heavy duty composite decking fibres are encapsulated in virgin polymers during the manufacturing process using the patented strandex technology, allowing no opportunity for moisture ingress.




HIGH SLIP RESISTANCE
RITEBOARD heavy duty composite decking has excellent grip in both wet and dry conditions. Tested to: AS 4586 it achieves Appendix A. Result: Class W (R11) making it ideal for pools and wet areas.



25 YEAR WARRANTY
Made in USA, RITEBOARD heavy duty composite decking comes with a 25 year limited warranty which guarantees quality and peace of mind for the life or re-sale of your investment.





HIGH DIMENSIONAL STABILITY
Using patented Strandex extrusion technology, every strand of wood fibre in RITEBOARD is encased in high-density polyethylene, for minimal movement and superior protection against UV and moisture.



ENVIRONMENTALLY FRIENDLY
RITEBOARD heavy duty composite decking is formulated with a mixture of virgin and recycled high-density polyethylene and wood dust, which promotes product longevity and environmental friendliness.

Profiles

	Specification Code: R*M13732 RITEBOARD Decking
	Specification Code: R*P6532 RITEBOARD Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
RGM13732	RITEBOARD 137 x 32mm Grey Decking, 5.4m Length	Stock	1 Length
RWM13732	RITEBOARD 137 x 32mm Walnut Decking, 5.4m Length	Stock	1 Length
RGP6532	RITEBOARD 65 x 32mm Grey Batten, 5.4m Length	1-2 Weeks	20 Lengths
RWP6532	RITEBOARD 65 x 32mm Walnut Batten, 5.4m Length	1-2 Weeks	20 Lengths
RRM/P****	Redwood Colour is Supplied to Order, 5.4m Lengths	10-12 Weeks	72 Lengths

Accessories

PAGE NO.	DESCRIPTION	LEAD TIME	MOQ
Page 111	PROPLUG Colour-matched Decking Screws	Stock	1 Pack
Page 112	STANDARD Galvanised & Stainless Steel Decking Screws	Stock	1 Pack

Colour Chart



INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




RITESCREEN

Through-colour Composite Screening


Description

Take your external screening to the next level with RITESCREEN wood composite screening by Rightwood (Formerly Duroscreen). Withstand the toughest daily challenges from mother nature using this commercial-grade solution. Made from a mixture of virgin and recycled plastic and recycled timber fibres, RITESCREEN wood composite screening delivers hard wearing strength and stability. It requires no oiling, painting or coating and is ideal for out of reach or hard to clean places. Easy to work with using standard tools it offers a stunning natural palette of colours for you to create a truly unique screen.


Product Benefits




THROUGH COLOUR MATERIAL
RITESCREEN wood composite screening is an integral board with the colour of the material going right through. Any scratches are very hard to see and can easily be fixed using a wire brush.




HIGH DURABILITY
RITESCREEN wood composite screening is formulated with a mixture of virgin and recycled plastic along with 50% recycled timber fibres. It is an extremely dense and impact-resistant product.




MAINTENANCE FREE
RITESCREEN wood composite screening does not require any surface finish at the time of installation and further to this it never requires any oiling, painting or coating over the life of the product.




ROT & PEST RESISTANT
RITESCREEN wood composite screening is guaranteed not to rot, split, warp or check. It is highly resistant to damage caused by termites and fungal decay and ideal for use in termite prone areas.




MATERIAL WARRANTY
RITESCREEN wood composite screening is manufactured by one of the world's oldest and most experienced producers of wood composite material. It is made in the USA and backed by a 25yr limited guarantee.



WATER RESISTANT
Wood fibres in RITESCREEN material are encapsulated in virgin polymers during the manufacturing process using the patented strandex technology, minimising any opportunity for moisture ingress.






DIMENSIONAL STABILITY
Unlike other composites RITESCREEN wood composite screening is dimensionally stable even in the harshest climates because of the high quality raw materials and patented manufacturing process.



ENVIRONMENTALLY FRIENDLY
RITESCREEN wood composite screening is formulated with a mixture of virgin and recycled plastic along with 50% timber fibres, which promotes product longevity and environmental friendliness.

Profiles

	Specification Code: R*S4024 RITESCREEN Square Edge
	Specification Code: R*S5524 RITESCREEN Square Edge
	Specification Code: R*S8524 RITESCREEN Square Edge

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
R*S4024	RITESCREEN 40 x 24mm Square, 5.4m Length	1-2 Weeks	21 Lengths
R*S5524	RITESCREEN 55 x 24mm Square, 5.4m Length	1-2 Weeks	20 Lengths
R*S8524	RITESCREEN 85 x 24mm Square, 5.4m Length	1-2 Weeks	20 Lengths
R*P6524	RITESCREEN 65 x 24mm Pencil Round, 5.4m Length	1-2 Weeks	20 Lengths
R*P13724	RITESCREEN 137 x 24mm Pencil Round, 5.4m Length	Stock	1 Length
R*S4032	RITESCREEN 40 x 32mm Square, 5.4m Length	1-2 Weeks	21 Lengths
R*S5532	RITESCREEN 55 x 32mm Square, 5.4m Length	1-2 Weeks	20 Lengths
R*S8532	RITESCREEN 85 x 32mm Square, 5.4m Length	1-2 Weeks	20 Lengths
R*P6532	RITESCREEN 65 x 32mm Pencil Round, 5.4m Length	1-2 Weeks	20 Lengths
R*P13732	RITESCREEN 137 x 32mm Pencil Round, 5.4m Length	Stock	1 Length
RR*****	Redwood Colour is Supplied to Order, 5.4m Length	12-14 Weeks	160 Lengths

Ritescreen Colours



INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

INSULATION PRODUCTS



82
IBOARD
Rigid Insulation Board



84
IBOARD G1
Group 1 Soffit Insulation Board



86
IBOARD P17
Insulated Plasterboard Lining




88
IROCK
Rockwool Insulation Board



90
INSULBLUE
Foam Insulation



92
FIRESPAN
Non-combustible Sarking

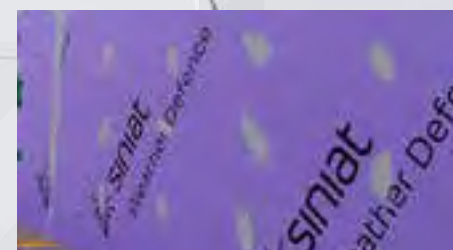

94
SINIAT WD
Weather Defence Rigid Air Barrier


IBOARD

Rigid Insulation Board


Description

IBOARD rigid insulation board is composed of a closed-cell thermoset polyisocyanurate foam core with two reflective foil facings. Tested in accordance with AS/NZ standards to comply with BCA/NCC requirements in concealed applications, IBOARD rigid insulation is manufactured using CFC/HCFC-free blowing agents that have zero Ozone Depletion Potential (ODP). Providing superior fire safety and higher R-values from less thickness, IBOARD rigid insulation gives sustained thermal performance over time and is widely used in brick cavity, frame-wall and concealed soffit applications.


Product Benefits




SUPERIOR FIRE PERFORMANCE
IBOARD rigid insulation offers superior results than alternative products when tested to AS 1530.3, the relevant Australian fire standard for concealed wall and soffit applications.




HIGHER R-VALUE
IBOARD rigid insulation provides excellent thermal properties with one of the lowest thermal conductivity ratings of any insulation material on the market at 0.022 W/mK.




SUPERIOR AGEING PERFORMANCE
Due to its outstanding resistance to moisture and excellent compressive strength, IBOARD rigid insulation offers much better thermal ageing performance than other products.




ENVIRONMENTALLY FRIENDLY
IBOARD rigid insulation is manufactured in Europe under strict quality control using only CFC/HCFC free blowing agents which have Zero Ozone Depletion Potential (ODP).




100% NON-CORROSIVE
Unlike some other insulation products, IBOARD core material is 100% non-corrosive and will not cause corrosion issues if it comes in contact with structural steel or fixings.



CLEAR CAVITY MAINTAINED
When IBOARD rigid insulation is used in wall cavity applications a clear cavity is still maintained making the cavity easily accessible for services such as electricity and water.



ZERO FORMALDEHYDE
IBOARD rigid insulation contains zero traces of formaldehyde and it is fibre-free making it non-irritant to the skin, non-allergenic and safer compared to other products.



MICRO CELL TECHNOLOGY
IBOARD core material has a much finer cell structure with extremely low water absorption compared to other products (<0.6%) so its R-value is retained long-term and it is rot and mould proof.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IBS302312	R1.36	IBOARD 30mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS402312	R1.82	IBOARD 40mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS502312	R2.27	IBOARD 50mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS602312	R2.73	IBOARD 60mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS702312	R3.18	IBOARD 70mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS802312	R3.64	IBOARD 80mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS902312	R4.09	IBOARD 90mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board
IBS1002312	R4.55	IBOARD 100mm Rigid Insulation, 2270 x 1200mm	Stock	1 Board

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
IUC250	IBOARD Universal Cavity Retainer Clip, 250 Pack	Stock	1 Pack

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	W/mK	0.022
Emittance	Actual	0.05
Spread of Flame Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	2
Tensile Strength Perpendicular to Faces	EN 1607	80 kPa
Compressive Strength	EN 826	>110 kPa

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




IBOARD G1

Group 1 Insulated Soffit Lining


Description

IBOARD G1 insulated soffit lining comprises of a Group 1 rated 6mm fibre cement facer bonded to a concealed rigid insulation board composed of a closed-cell thermoset polyisocyanurate foam. Tested in accordance with relevant AS/NZ standards, IBOARD G1 is compliant for use in all soffit applications in accordance with NCC 2019. Providing higher R-values from less thickness, IBOARD G1 allows increased clearance height within carparks while still meeting thermal requirements making it the safest and most practical option for all concrete soffit and under-slab applications.


Product Benefits




GROUP 1 FIRE RATING*
IBOARD G1 soffit insulation has a non-combustible fibre cement facer which achieves a Group 1 fire rating in accordance with AS 5637 for superior safety and compliance in all under slab soffit applications.




ZERO FORMALDEHYDE
IBOARD G1 soffit insulation contains zero traces of formaldehyde and it is fibre-free making it non-irritant to the skin, non-allergenic and safer compared to other products.




UNLIMITED COLOURS
IBOARD G1 soffit insulation has an attractive light grey fibre cement finish which can be left untreated, painted insitu, or supplied prefinished in unlimited custom colours to your selection.




AUSTRALIAN FIRE TESTING
IBOARD G1 soffit insulation has NATA accredited testing to relevant Australian fire standards and it's Group 1 fire rating means it is compliant with NCC 2019 for all lining applications.




SUPERIOR AGEING PERFORMANCE
Due to it's outstanding resistance to moisture and excellent compressive strength, IBOARD G1 soffit insulation offers much better thermal ageing performance than other products.



ENVIRONMENTALLY FRIENDLY
IBOARD G1 soffit insulation is manufactured in Europe under strict quality control using only CFC/HCFC free blowing agents which have Zero Ozone Depletion Potential (ODP).



100% NON-CORROSIVE
Unlike some other insulation products, IBOARD G1 core material is 100% non-corrosive and will not cause corrosion issues if it comes in contact with structural steel or fixings.



MICRO CELL TECHNOLOGY
IBOARD G1 has a much finer cell structure with extremely low water absorption compared to other products (<0.6%) so it's R-value is retained long-term and it is rot and mould proof.

*Group 1 fire rating applies to the exposed fibre cement facing in accordance with AS 5637 and NCC 2019 requirements.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IBG362412	R1.38	IBOARD 36mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG462412	R1.84	IBOARD 46mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG562412	R2.29	IBOARD 56mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG662412	R2.75	IBOARD 66mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG762412	R3.20	IBOARD 76mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG862412	R3.66	IBOARD 86mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG962412	R4.11	IBOARD 96mm G1 Insulation, 2400 x 1200mm	Stock	1 Board
IBG1062412	R4.57	IBOARD 106mm G1 Insulation, 2400 x 1200mm	Stock	1 Board

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity (Insulation)	W/mK	0.022*
Thermal Conductivity (Fibre Cement)	W/mK	0.23*
Group Rating	AS 5637	Group 1**
Average Specific Extinction Area	m2/kg	<250**
Smoke Growth Rate (SMOGRA)	m2/sx1000	<100**
Spread of Flame Index	AS 1530.3	0***
Smoke Developed Index	AS 1530.3	2***
Tensile Strength Perpendicular to Faces	EN 1607	80 kPa
Compressive Strength	EN 826	>110 kPa
Compressive Strength at 10% Deformation	EN 826	>150 kPa

*Material R-values are calculated based on the insulation thickness at 0.022 W/mK in addition to the 6mm fibre cement at 0.23W/mK. **The AS 5637 testing and Group 1 rating applies to the exposed fibre cement facer, being the wall or ceiling lining, in accordance with NCC 2019 requirements. ***The AS 1530.3 testing applies to the PIR insulation board, being a concealed insulation material, in accordance with NCC 2019 requirements.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




IBOARD P17

Insulated Plasterboard Lining


Description

IBOARD P17 insulated plasterboard is an internal lining product composed of a closed-cell thermoset polyisocyanurate foam core bonded to a 10mm deemed-to-satisfy non-combustible gypsum based plasterboard. Tested in accordance with relevant AS/NZ standards, IBOARD P17 insulated plasterboard provides the highest level group 1 fire rating in accordance with AS 5637*. Unlike alternative products, IBOARD P17 insulated plasterboard offers excellent ageing performance due to its very high moisture resistance and it is 100% formaldehyde free for superior air quality and occupant wellbeing.


Product Benefits




ZERO FORMALDEHYDE
IBOARD P17 insulated plasterboard contains zero traces of formaldehyde and it is fibre-free making it non-irritant to the skin, non-allergenic and safer compared to other products.




HIGHER R-VALUE
IBOARD P17 insulated plasterboard provides excellent thermal properties with one of the lowest thermal conductivity ratings of any insulation material on the market at 0.022 W/mK.




GROUP 1 FIRE RATING*
IBOARD P17 insulated plasterboard has a non-combustible plasterboard facer which achieves a Group 1 fire rating in accordance with AS 5637 for superior safety and compliance in all internal lining applications.




ENVIRONMENTALLY FRIENDLY
IBOARD P17 rigid insulation is manufactured in Europe under strict quality control using only CFC/HCFC free blowing agents which have Zero Ozone Depletion Potential (ODP).




SUPERIOR AGEING PERFORMANCE
Due to its outstanding resistance to moisture and excellent compressive strength, IBOARD P17 rigid insulation offers much better thermal ageing performance than other products.



TIME & SPACE SAVER
Due to being a 2-in-1 product, IBOARD P17 insulated plasterboard is fast and efficient to install and offers cost and space savings due to its high R-value to thickness ratio.



100% NON-CORROSIVE
Unlike some other insulation products, IBOARD P17 insulated plasterboard core material is 100% non-corrosive and will not cause corrosion issues if it comes in contact with structural steel or fixings.



MICRO CELL TECHNOLOGY
IBOARD P17 has a much finer cell structure with extremely low water absorption compared to other products (<0.6%) so its R-value is retained long-term and it is rot and mould proof.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IBP402412	R1.42	IBOARD 40mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP502412	R1.88	IBOARD 50mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP602412	R2.33	IBOARD 60mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP702412	R2.79	IBOARD 70mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP802412	R3.24	IBOARD 80mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP902412	R3.70	IBOARD 90mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP1002412	R4.15	IBOARD 100mm P17 Insulation, 2400 x 1200mm	Stock	1 Board
IBP1102412	R4.61	IBOARD 110mm P17 Insulation, 2400 x 1200mm	Stock	1 Board

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity (Insulation)	W/mK	0.022*
Thermal Conductivity (Plasterboard)	W/mK	0.17*
Group Rating	AS 5637	Group 1**
Average Specific Extinction Area	m2/kg	<250**
Smoke Growth Rate (SMOGRA)	m2/s2x1000	<100**
Spread of Flame Index	AS 1530.3	0***
Smoke Developed Index	AS 1530.3	2***
Tensile Strength Perpendicular to Faces	EN 1607	80 kPa
Compressive Strength	EN 826	>110 kPa
Compressive Strength at 10% Deformation	EN 826	>150 kPa

*Material R-values are calculated based on the insulation thickness at 0.022 W/mK in addition to the 10mm plasterboard at 0.17W/mK. **The AS 5637 testing and Group 1 rating applies to the exposed plasterboard facer, being the wall or ceiling lining in accordance with NCC 2019 requirements. ***The AS 1530.3 testing applies to the PIR insulation board, being a concealed insulation material, in accordance with NCC 2019 requirements.

*Group 1 fire rating applies to the exposed plasterboard facing in accordance with AS 5637 and NCC 2019 requirements.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




IROCK

Rockwool Insulation Board


Description

IROCK rockwool insulation board is a non-combustible insulation material widely used in external wall and facade applications which require high levels of fire safety and thermal performance. IROCK is manufactured by spinning a molten mixture of natural rock and other additives to create fine wool-like fibres which are bonded together using a thermoset resin to form a rigid insulation board. Compliant with NCC 2019 for use in external wall applications, IROCK offers excellent resistance to water absorbtion and is FSB-1 biosoluble for safe, comfortable installation and long-term performance.


Product Benefits




NON-COMBUSTIBLE
IROCK is deemed non-combustible when tested to AS 1530.1 meaning it is compliant for use in external walls and cladding systems which are required to be non-combustible in buildings of types A & B construction.




COST EFFECTIVE
With a nominal thermal conductivity of 0.036 W/mK and a very economical price-point, IROCK offers excellent thermal efficiency for minimal upfront cost along with life-cycle energy savings for the building.




MOISTURE RESISTANT
Although it is not suitable for permanent immersion or exposure to drenching, IROCK insulation board's thermal performance will not be adversely effected by condensation or contact with liquid water.



ENVIRONMENTALLY FRIENDLY
Largely manufactured from recycled materials and natural rock, IROCK is environmentally friendly as an initial product. It also offers numerous environmental benefits in application as thermal insulation.




FSB-1 BIOSOLUBLE
Unlike some other insulation products, IROCK mineral-based fibres have an FSB-1 biosolubility rating and are classified non-hazardous in accordance with ASCC guidelines for safe, comfortable use.



NCC 2019 COMPLIANT
NCC 2019 Clause C1.9 specifically requires all components of external walls including cladding, insulation and framing to be non-combustible and IROCK is one of only a few materials that meet this criteria.



LIGHT-WEIGHT & DURABLE
IROCK rockwool insulation boards are both light-weight and highly durable for easy hassle-free handling onsite and they can be easily cut and formed to suit almost any application.



ACOUSTIC BENEFIT
IROCK is primarily intended as a thermal insulation material for section J compliance however as an added benefit, it also offers excellent acoustic properties helping to make buildings even more livable.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IR402312	R1.14	IROCK 40mm Rockwool Board, 2270 x 1200mm	Stock	1 Board
IR602312	R1.71	IROCK 60mm Rockwool Board, 2270 x 1200mm	Stock	1 Board
IR802312	R2.29	IROCK 80mm Rockwool Board, 2270 x 1200mm	3-5 Days	1 Board
IR1002312	R2.86	IROCK 100mm Rockwool Board, 2270 x 1200mm	3-5 Days	1 Board

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	EN 12667	0.035 W/mK
Non-combustible (DtS)	AS 1530.1	Pass
Ignitability Index	AS 1530.3	0
Spread of Flame Index	AS 1530.3	0
Heat Evolved Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	1
Material Density	Kg/m3	100
Compressive Strength	ASTM C165-07	10 KN/m2
Maximum Service Temperature	Degrees	<750
Melting Temperature	Degrees	>1000
Rockwool Content	Actual	>95%
Resin Content	Actual	<5%
Water Absorbtion	EN 1609	<1%
Fungal Resistance	ASTM C655	Pass
Fibre Bio-solubility	ASCC	FSB-1

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




INSULBLUE

Foam Insulation


Description

INSULBLUE foam insulation products are a heavy duty 3-in-1 insulation, thermal and radiant barrier comprising of an advanced high density closed cell XPE foam material sandwiched between two layers of poly woven foil. INSULBLUE foam insulation provides excellent thermal properties and reflectivity and is suitable for use in roof, cavity, wall wrap and floor systems for all construction types. It provides superior thermal ratings to standard sarking and helps to reduce thermal bridging between building elements such as exterior cladding and structure.


Product Benefits




EASY TO USE
INSULBLUE foam insulation is a ultra flexible product which is easily adaptable for wrap-around areas and varied surface types making it quick and easy to install.




BCA COMPLIANT
INSULBLUE foam insulation has been tested in accordance with relevant Australian standards giving confidence to builders and contractors for suitability in all applications.




TEAR RESISTANCE
With heavy duty foil and high density XPE foam core, INSULBLUE foam insulation is able to withstand high wind and has high tear resistance in extreme conditions.




FIBRE-FREE MATERIAL
Made from cross-linked closed cell XPE foam, INSULBLUE foam insulation is non-irritant to skin and non-allergenic making it easy for contractors to work with.




RESISTANT TO DELAMINATION
The poly woven reflective foils used in the manufacture of INSULBLUE foam insulation offer outstanding resistance to delamination over time ensuring excellent long term performance.



CLEAR CAVITY MAINTAINED
When INSULBLUE foam insulation is used in wall cavity applications such as double brick construction a clear cavity is still maintained making it easily accessible for services.



PROVEN TO PERFORM IN WA
Used widely in roofing, wall wrap and cavity applications across Western Australia, INSULBLUE foam insulation has been proven to withstand the harsh climate statewide.



WATER RESISTANT
The heavy duty facings and closed-cell material structure of INSULBLUE foam insulation means there is no product degradation over time caused by any event of moisture ingress.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IFX413522	R0.10	INSULBLUE 4mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX613522	R0.17	INSULBLUE 6.5mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX813522	R0.20	INSULBLUE 8mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ICS6060	INSULBLUE 60 x 60 x 20mm Cavity Spacers, 50 Pack	Stock	1 Pack
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	W/mK	0.04
Flammability Index	AS 1530.2	<5
Spread of Flame Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	1
Strength / Duty	AS 4200.1	Heavy Duty
Emittance	AS 4201.5	0.03
Reflectivity	Actual	97%
Dry Delamination	AS 4201.1	Pass
Wet Delamination	AS 4201.2	Pass
Corrosion Resistance	AS 4859.1	Pass

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




FIRESPAN

Non-combustible Sarking


Description

FIRESPAN non-combustible wall wrap and sarking is a heavy duty membrane which is BCA compliant and Deemed-to-Satisfy non-combustible for use in exterior cladding systems on all types of construction. Tested in accordance with AS 1530.1 and AS 1530.3 fire standards, FIRESPAN is available in waterproof and perforated variations. The reflective foil face on one side provides extra R-value when installed facing an air cavity and FIRESPAN is classified as a barrier to radiant heat, moisture ingress, draughts and dust penetration when installed as per AS 4200.2.


Product Features




AS 1530.1 NON-COMBUSTIBLE
FIRESPAN sarking is Deemed-to-Satisfy non-combustible in accordance with NCC 2019 Clause C1.9(e)(vi) and (vii) meaning it can be used on any building of types A, B and C construction.




HIGH DURABILITY
FIRESPAN has an advanced strength non-combustible fibre-glass and pure aluminium foil structure meaning it offers excellent durability and resistance to delamination over time.




CSIRO FIRE TESTING
FIRESPAN has been appropriately tested to relevant Australian standards including AS 1530.1 and AS 1530.3 by NATA accredited CSIRO and is Deemed-to-Satisfy non-combustible.




NCC 2019 COMPLIANT
FIRESPAN sarking has been tested in accordance with relevant Australian fire standards including AS 1530.1, AS 1530.2 and AS 1530.3 giving confidence to builders and contractors for suitability on all projects.




EASY TO USE
FIRESPAN sarking is a high strength and ultra flexible product easily adaptable for wrap-around areas and varied surface types therefore quick and easy to install.



WATER RESISTANT
The heavy duty facing material structure of FIRESPAN sarking and wall wrap means there is no moisture ingress or break-down ensuring superior long term performance.



ANTI-TEAR STRENGTH
With ultra heavy duty foil and multi-layer woven construction, FIRESPAN sarking is able to withstand moderate wind and won't tear of the building when under pressure.



PROTECTS THE BUILDING
During construction FIRESPAN sarking will help protect the building frame from the external elements helping to prevent onset of any degradation or corrosion.

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
FSS12540	FIRESPAN Waterproof Membrane, 1.25 x 40m Roll	Stock	1 Roll
FSB12540	FIRESPAN Perforated Membrane, 1.25 x 40m Roll	Stock	1 Roll

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ITH6030	INSULTAPE 60mm High Tack Sarking Tape, 30m Roll	Stock	1 Roll

Technical Data

TEST ITEM	STANDARD	RESULT
Non-combustible (DtS)	AS 1530.1	Pass*
Ignitability Index	AS 1530.3	0*
Spread of Flame Index	AS 1530.3	0*
Heat Evolved Index	AS 1530.3	0*
Smoke Developed Index	AS 1530.3	1*
Flammability Index	AS 1530.2	1**
Strength / Duty	AS 4200.1	Heavy Duty
Emittance	AS 4201.5	0.05
Reflectivity	Actual	95%

*Deemed-to-Satisfy non-combustible in accordance with AS 1530.1 and AS 1530.3 testing as per the requirements of NCC 2019 clause C1.9(e)(vii). **Also Deemed-to-Satisfy non-combustible as per NCC 2019 clause C1.9(e)(vi), with thickness <1mm and Flammability-Index <5.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




SINIAT WD

Weather Defence Rigid Air Barrier


Description

SINIAT WD is a weather resistant, highly breathable rigid air barrier (RAB) that is also non-combustible, vapour permeable and doubles as a fire-resistant board to provide a fire barrier between the façade and the interior. Providing better weather resistance than pliable alternatives it also equalises air pressure within the outer wall cavity to prevent water ingress. It requires no additional sarking due to its patented hydrophobic core and integrated liner and it can be exposed to weather for up to 12 months prior to being over-clad, offering early access for internal trades.


Product Features




FOUR-IN-ONE SOLUTION
SINIAT WD is fire resistant, non-combustible, vapour permeable and weathertight all in one product. Eliminating the need for a breathable membrane saving time and reducing installation cost.




FRL TESTING
SINIAT WD solutions offer fire resistant wall systems up to 60/60/60 which satisfy Deemed-to-Satisfy compliance for vertical & spandrel fire separation between floors and openings.




AIR & WEATHER TIGHT
Along with the proprietary joint sealing system, SINIAT WD is extremely airtight with leakage of 0.002m3/m2/hr for compliance with the NCC 2019 air leakage requirements for class 2-9 buildings.




PATENTED TECHNOLOGY
SINIAT WD is weathertight with no need for additional sarking thanks to a patented hydrophobic core and glass matt liner technology. Proprietary joint jape must be used on all joints, corners and openings.




BREATHABLE BARRIER
SINIAT WD is highly breathable at 0.49 MNs/g or 2.04 µg/N.s allowing water vapour to escape the cavity and helping to control moisture build up, unlike other non-permeable back pan methods.



MANUFACTURER'S WARRANTY
SINIAT WD is manufactured by Etex Group, one of the largest suppliers of construction materials globally and it comes with a 12 year warranty when installed by a certified installer



UP TO 1YR EXPOSED
SINIAT WD can be left exposed to the weather for up to 12 months before cladding is installed allowing early lock up and start of internal trades and linings as building is weather sealed.



NON-COMBUSTIBLE
SINIAT WD is deemed non-combustible according to C1.9 of the BCA/NCC 2019 and can be used in any cladding or lining application where non-combustible materials are required.

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SWD2412	SINIAT WD 13mm Rigid Air Barrier Board, 2400 x 1200mm	Stock	1 Sheet
SWDS60	SINIAT WD Fireblock XT Sealant, 600ml Sausage	Stock	20 Sausages
SWDM38	SINIAT WD 38mm Self Drilling Metal Screw, 1000 Pack	Stock	1 Pack
SWDT42	SINIAT WD 42mm High Thread Timber Screw, 1000 Pack	Stock	1 Pack
ITS6030	INSULTAPE 60mm Proclima / Siniat Tape, 30m Roll	Stock	1 Roll
ITS15020	INSULTAPE 150mm Proclima / Siniat Tape, 20m Roll	Stock	1 Roll


Technical Data

TEST ITEM	STANDARD	RESULT
Material Density	Kg/m³	860
Reaction to Fire	EN 13501-1	A1
Non-combustible (DtS)	C1.9(e)	Pass
Resistance to Mould Growth	ASTM 03273	Pass
Thermal Conductivity	W/mK	0.25
Thermal Resistance	R-value	0.05
Water Vapour Resistance	MNs/g	0.49
Water Uptake (2hrs Immersion)	EN 520	<3%
Water Absorbtion (2hrs Cobb Test)	g/m²	<100
Dimensional Change	mm/m	<0.11
Flexural Strength	N	>310
Elastic Modulus	MPa	>3150
Impact Resistance	EN 15283-1	GM-I
Compressive Strength	N/mm2	9

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



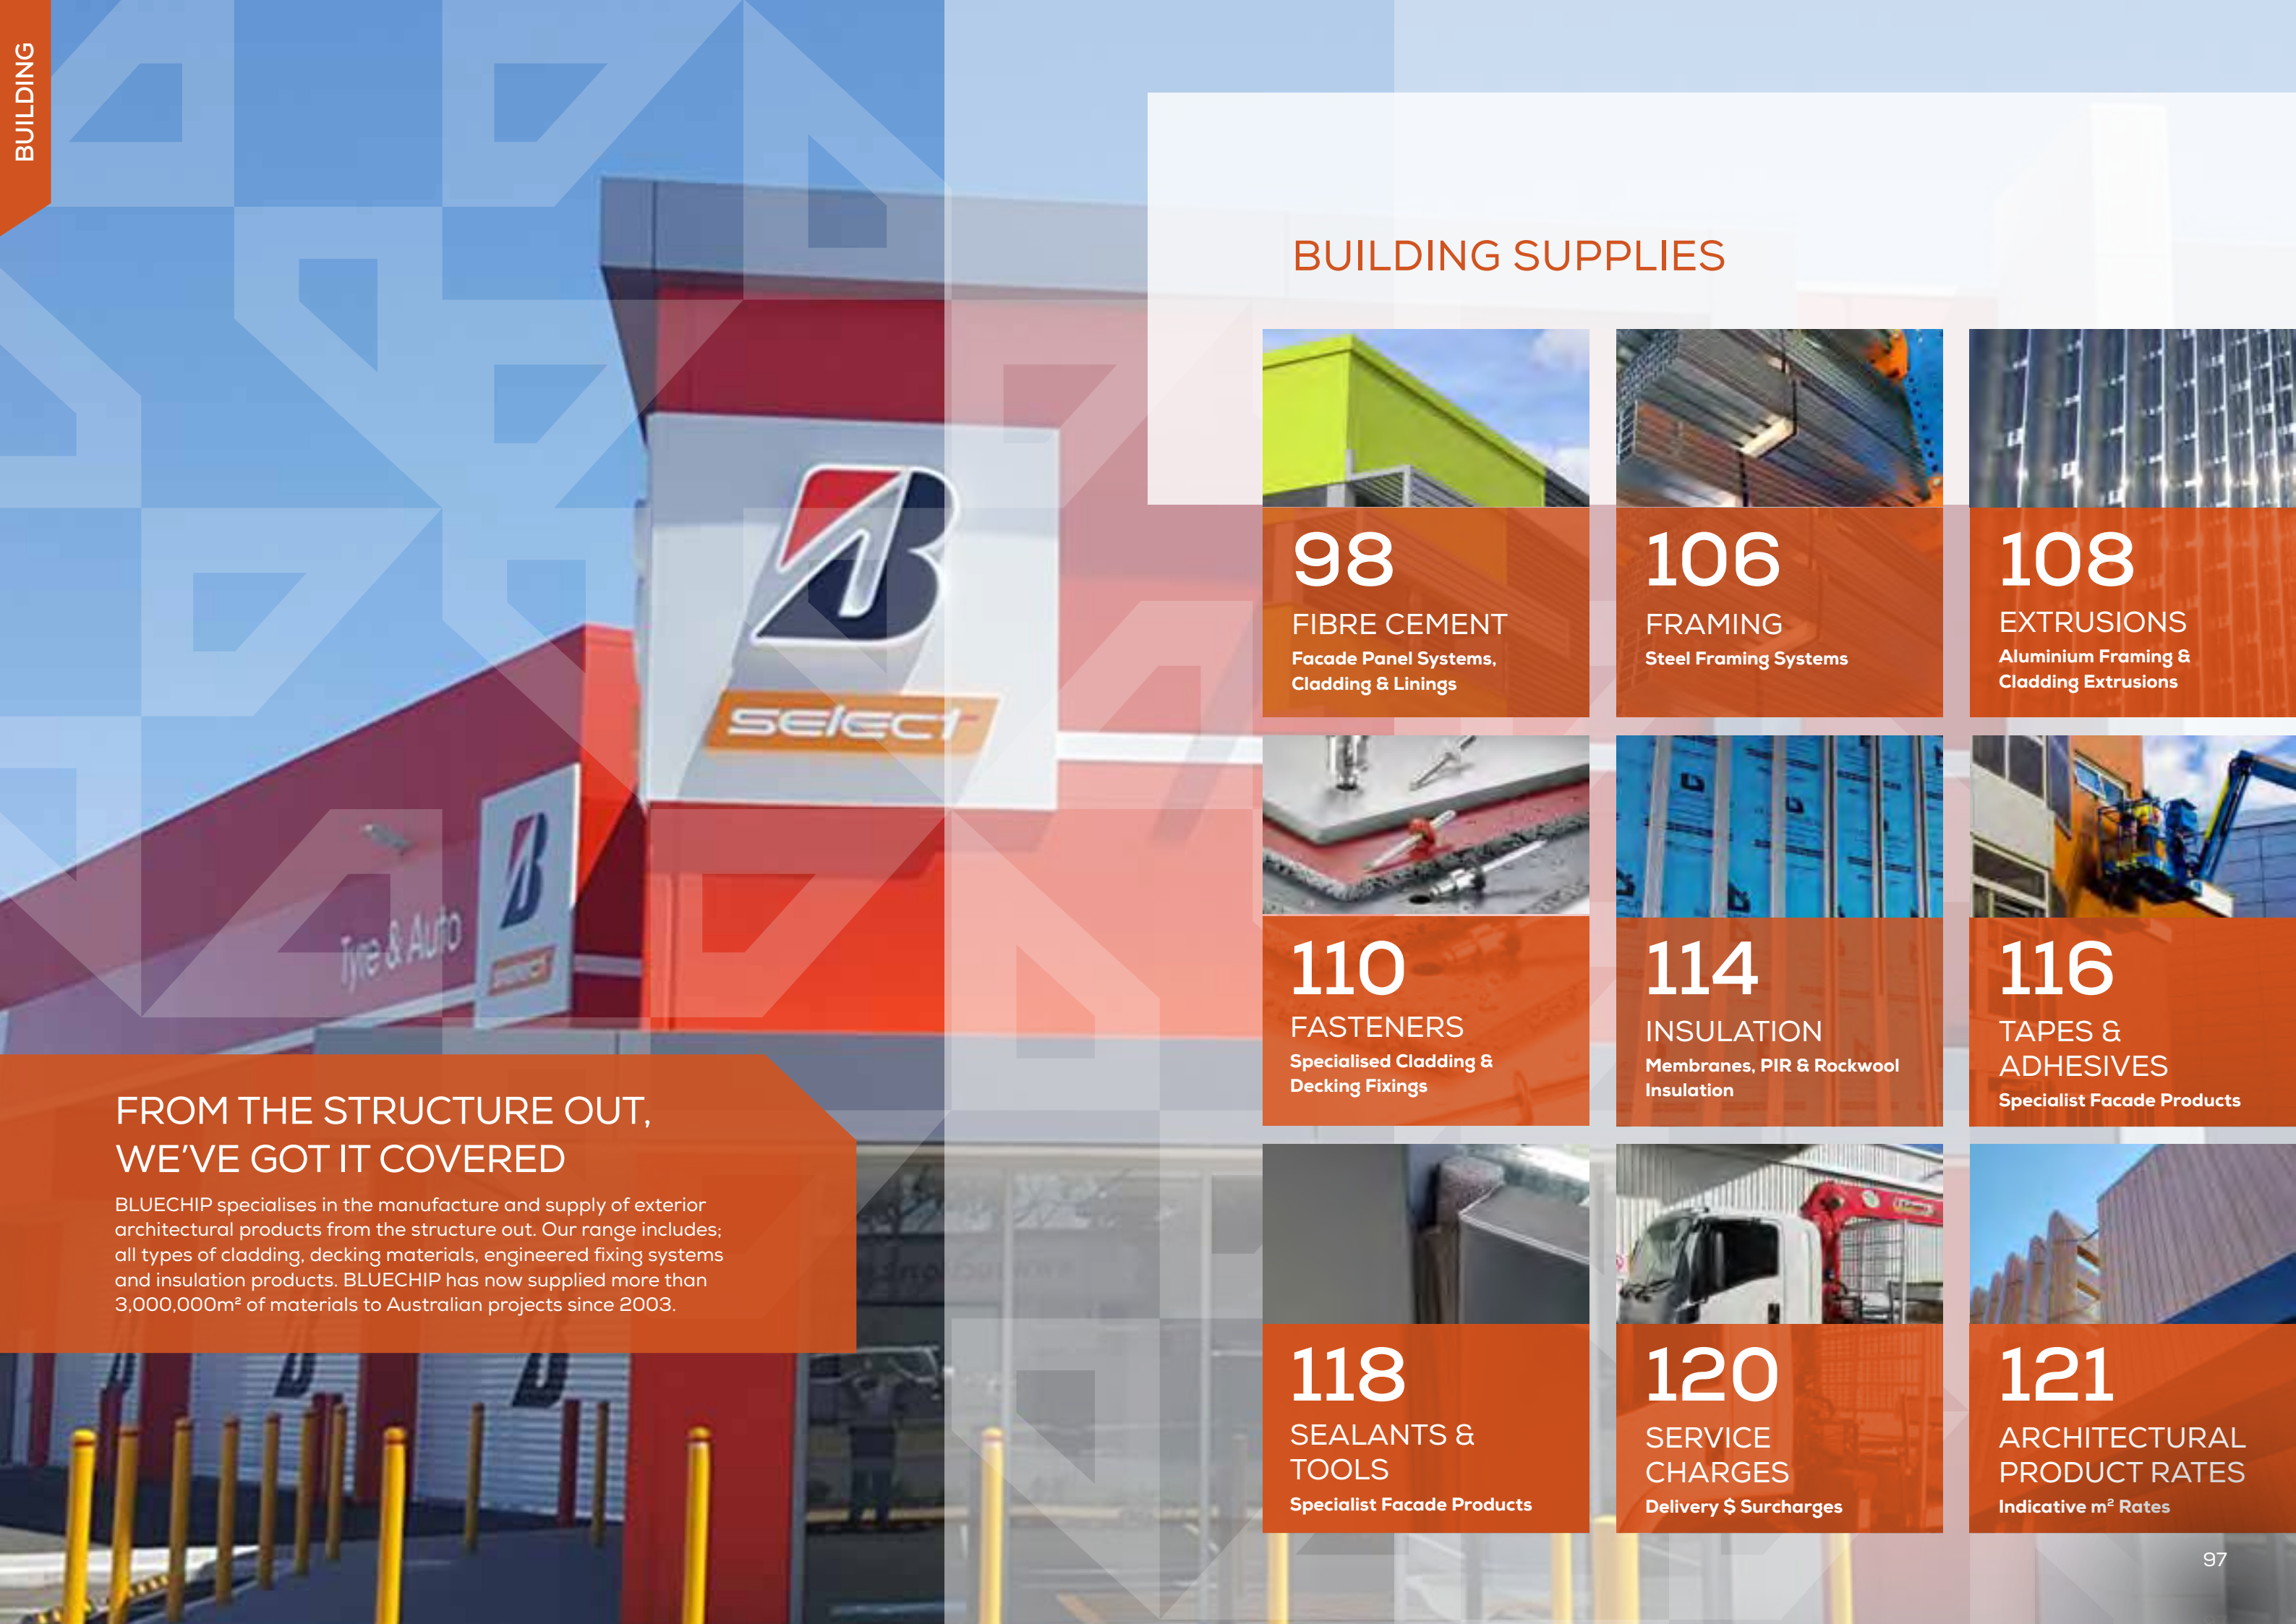

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

BUILDING SUPPLIES



98

FIBRE CEMENT
Facade Panel Systems,
Cladding & Linings



106

FRAMING
Steel Framing Systems



108

EXTRUSIONS
Aluminium Framing &
Cladding Extrusions



110

FASTENERS
Specialised Cladding &
Decking Fixings



114

INSULATION
Membranes, PIR & Rockwool
Insulation



116

TAPES &
ADHESIVES
Specialist Facade Products



118

SEALANTS &
TOOLS
Specialist Facade Products



120

SERVICE
CHARGES
Delivery & Surcharges



121

ARCHITECTURAL
PRODUCT RATES
Indicative m² Rates



FIBRE CEMENT

Facade Panel Systems

Greystone Facade Panel

CODE	DESCRIPTION	\$/EACH	\$/M²
GSN2412	GREYSTONE 9mm Natural Grey, 2400 x 1200mm	\$158.43	\$55.01
GSC2412	GREYSTONE 9mm Charcoal, 2400 x 1200mm	\$158.43	\$55.01

Duracom Facade Panel

CODE	DESCRIPTION	\$/EACH	\$/M²
DC91890	DURACOM 9mm Fibre Cement, 1800 x 900mm	\$47.66	\$29.42
DC92490	DURACOM 9mm Fibre Cement, 2400 x 900mm	\$63.55	\$29.42
DC93090	DURACOM 9mm Fibre Cement, 3000 x 900mm	\$79.44	\$29.42
DC91812	DURACOM 9mm Fibre Cement, 1800 x 1200mm	\$63.55	\$29.42
DC92412	DURACOM 9mm Fibre Cement, 2400 x 1200mm	\$84.73	\$29.42
DC92712	DURACOM 9mm Fibre Cement, 2700 x 1200mm	\$95.33	\$29.42
DC93012	DURACOM 9mm Fibre Cement, 3000 x 1200mm	\$105.92	\$29.42

Greystone & Duracom Accessories

CODE	DESCRIPTION	\$/EACH	\$/LM
FRAMING	STUDTEK Steel Facade Framing System	Page 106	-
GSS3010	GREYSTONE 30mm x 10-16 Wafer Screw, 1000 Pack	\$43.31	-
BCNFW	GREYSTONE 8mm Nylon Facade Washer, 1000 Pack	\$21.95	-
GSSEAL	GREYSTONE 500ml Edge Sealer (Apply to all cut edges)	\$13.61	-
DCSEAL	DURACOM 400g Edge Sealer (Apply to all cut edges)	\$17.56	-
MEGAP1	BLUECHIP Megapoxy P1 Filler, 1 Litre	\$62.51	-


Duragrid Facade Panel

CODE	DESCRIPTION	\$/EACH	\$/M²
DG9119119	DURAGRID 9mm Fibre Cement, 1190 x 1190mm	\$38.43	\$27.12
DG9299119	DURAGRID 9mm Fibre Cement, 2990 x 1190mm	\$96.55	\$27.12
DG917989	DURAGRID 9mm Fibre Cement, 1790 x 890mm	\$43.22	\$27.12
DG923959	DURAGRID 9mm Fibre Cement, 2390 x 590mm	\$38.26	\$27.12

Duragrid Accessories

CODE	DESCRIPTION	\$/EACH	\$/LM
DGB27	DURAGRID 70 x 19mm Timber Batten, 2.7m Length	\$13.74	\$5.09
DGB30	DURAGRID 70 x 19mm Timber Batten, 3.0m Length	\$15.26	\$5.09
SG751560	STUDTEK 75 x 15mm Top-hat, 6.0m Length	\$25.79	\$4.30
SG753560	STUDTEK 75 x 35mm Top-hat, 6.0m Length	\$33.01	\$5.50
SJS359	STUDTEK 67 x 3.5mm Black Backing Strip, 3.59m Length	\$5.12	\$1.43
SJS299	STUDTEK 67 x 3.5mm Black Backing Strip, 2.99m Length	\$4.27	\$1.43

Product Range

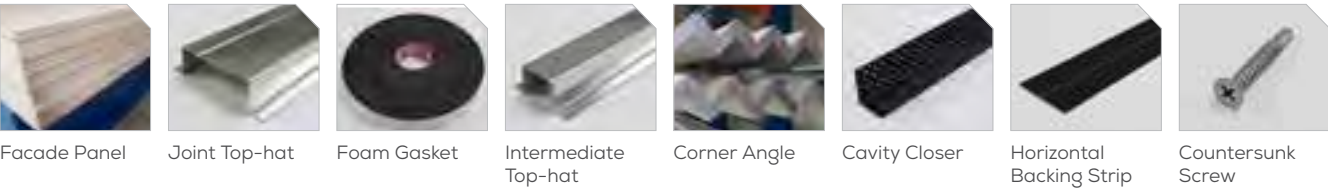

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.



FIBRE CEMENT

Cladding Systems

Duragroove Smooth Cladding

CODE	DESCRIPTION	\$/EACH	\$/M²
DVSN24512	DURAGROOVE 9mm Smooth Narrow, 2450 x 1200mm	\$75.45	\$25.66
DVSN27512	DURAGROOVE 9mm Smooth Narrow, 2750 x 1200mm	\$84.69	\$25.66
DVSN3012	DURAGROOVE 9mm Smooth Narrow, 3000 x 1200mm	\$92.39	\$25.66
DVSW24512	DURAGROOVE 9mm Smooth Wide, 2450 x 1200mm	\$75.45	\$25.66
DVSW27512	DURAGROOVE 9mm Smooth Wide, 2750 x 1200mm	\$84.69	\$25.66
DVSW3012	DURAGROOVE 9mm Smooth Wide, 3000 x 1200mm	\$92.39	\$25.66
DVSX24512	DURAGROOVE 9mm Smooth Extra Wide, 2450 x 1200mm	\$75.45	\$25.66
DVSX27512	DURAGROOVE 9mm Smooth Extra Wide, 2750 x 1200mm	\$84.69	\$25.66
DVSX3012	DURAGROOVE 9mm Smooth Extra Wide, 3000 x 1200mm	\$92.39	\$25.66

Duragroove Woodgrain Cladding

CODE	DESCRIPTION	\$/EACH	\$/M²
DVWW24512	DURAGROOVE 9mm Woodgrain Wide, 2450 x 1200mm	\$85.17	\$28.97
DVWW27512	DURAGROOVE 9mm Woodgrain Wide, 2750 x 1200mm	\$95.60	\$28.97
DVWW3012	DURAGROOVE 9mm Woodgrain Wide, 3000 x 1200mm	\$104.29	\$28.97

Duragroove Accessories

CODE	DESCRIPTION	\$/EACH	\$/LM
DTEC	DURATRIM External Corner, 3.0m Length	\$28.05	\$9.08
DTIC	DURATRIM Internal Corner, 3.0m Length	\$26.97	\$8.73
DTHF	DURATRIM Horizontal Flashing, 3.0m Length	\$18.99	\$6.15
GASKETS	STUDTEK Foam Gaskets for Joint Top-hats	Page 116	-

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.


Stratum Cladding

CODE	DESCRIPTION	\$/EACH	\$/M²
STS3042	STRATUM 300 x 12mm Standard Profile, 4.2m Length	\$49.41	\$42.63
STD3042	STRATUM 300 x 12mm Duo Profile, 4.2m Length	\$49.41	\$42.63
STT3042	STRATUM 300 x 12mm Trio Profile, 4.2m Length	\$49.41	\$42.63
STC1742	STRATUM 170 x 10mm Contour Profile, 4.2m Length	\$19.52	\$32.97
STE29542	STRATUM 295 x 10mm Era Profile, 4.2m Length	\$36.60	\$31.58

Stratum Accessories

CODE	DESCRIPTION	\$/EACH	\$/LM
STSEC	STRATUM Standard External Corner, 3.0m Length	\$30.81	\$10.27
STCEC	STRATUM Contour External Corner, 3.0m Length	\$43.89	\$14.83
STEEC	STRATUM Era External Corner, 3.0m Length	\$28.05	\$9.35
STSIC	STRATUM Standard Internal Corner, 3.0m Length	\$28.66	\$9.55
STCIC	STRATUM Contour Internal Corner, 3.0m Length	\$29.71	\$9.24
STEIC	STRATUM Era Internal Corner, 3.0m Length	\$26.97	\$8.99
STCSS	STRATUM Contour Starter Strip, 3.0m Length	\$11.72	\$3.91
SJS299	STUDTEK 67 x 3.5mm Black Backing Strip, 2.99m Length	\$4.27	\$1.43
GASKETS	STUDTEK Foam Gaskets for Joint Top-hats	Page 116	-

Product Range

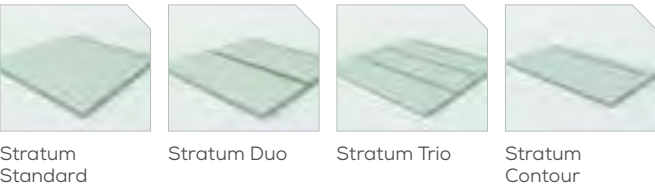

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.



FIBRE CEMENT

Weatherboard & Base Sheet

Nuline Plus Weatherboard

CODE	DESCRIPTION	\$/EACH	\$/M²
NLB17542	NULINE 175 x 14mm Bullnose Profile, 4.2m Length	\$33.90	\$55.66
NLB20542	NULINE 205 x 14mm Bullnose Profile, 4.2m Length	\$38.61	\$52.53
NLS17542	NULINE 175 x 14mm Square Profile, 4.2m Length	\$30.72	\$50.44
NLS20542	NULINE 205 x 14mm Square Profile, 4.2m Length	\$35.47	\$48.26

Nuline Plus Accessories

CODE	DESCRIPTION	\$/EACH	\$/LM
NLJM	NULINE J Mould, 2.7m Length	\$23.59	\$8.74
NLSS	NULINE Starter Strip, 2.7m Length	\$23.77	\$8.80
NLEC	NULINE External Corner, 2.7m Length	\$43.89	\$16.26
NLIC	NULINE Internal Corner, 2.7m Length	\$27.71	\$10.26

Duraplank Weatherbord

CODE	DESCRIPTION	\$/EACH	\$/M²
DPS2342	DURAPLANK 230 x 7.5mm Smooth, 4.2m Length	\$13.40	\$15.56
DPS3042	DURAPLANK 300 x 7.5mm Smooth, 4.2m Length	\$19.36	\$16.76
DPW2342	DURAPLANK 230 x 7.5mm Woodgrain, 4.2m Length	\$15.60	\$18.12
DPW3042	DURAPLANK 300 x 7.5mm Woodgrain, 4.2m Length	\$21.45	\$18.57
DPR20542	DURAPLANK 205 x 7.5mm Rusticated, 4.2m Length	\$14.19	\$18.77

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

Durascape Base Sheet

CODE	DESCRIPTION	\$/EACH	\$/M²
DS92459	DURASCAPE 9mm Fibre Cement, 2450 x 900mm	\$43.86	\$19.89
DS9309	DURASCAPE 9mm Fibre Cement, 3000 x 900mm	\$53.70	\$19.89
DS924512	DURASCAPE 9mm Fibre Cement, 2450 x 1200mm	\$58.48	\$19.89
DS93012	DURASCAPE 9mm Fibre Cement, 3000 x 1200mm	\$71.61	\$19.89

Duratex 9mm Base Sheet

CODE	DESCRIPTION	\$/EACH	\$/M²
DT92412	DURATEX 9mm Fibre Cement, 2400 x 1200mm	\$61.64	\$21.40
DT93012	DURATEX 9mm Fibre Cement, 3000 x 1200mm	\$77.04	\$21.40

Duratex 7.5mm Base Sheet

CODE	DESCRIPTION	\$/EACH	\$/M²
DT72449	DURATEX 7.5mm Fibre Cement, 2440 x 900mm	\$25.89	\$11.79
DT727259	DURATEX 7.5mm Fibre Cement, 2725 x 900mm	\$28.91	\$11.79
DT7309	DURATEX 7.5mm Fibre Cement, 3000 x 900mm	\$31.83	\$11.79
DT71812	DURATEX 7.5mm Fibre Cement, 1800 x 1200mm	\$25.46	\$11.79
DT724412	DURATEX 7.5mm Fibre Cement, 2440 x 1200mm	\$34.52	\$11.79
DT7272512	DURATEX 7.5mm Fibre Cement, 2725 x 1200mm	\$38.54	\$11.79
DT73012	DURATEX 7.5mm Fibre Cement, 3000 x 1200mm	\$42.44	\$11.79

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





FIBRE CEMENT

Linings & Floorings

Duralux Internal Lining

CODE	DESCRIPTION	\$/EACH	\$/M²
DX92412	DURALUX 9mm Fibre Cement, 2400 x 1200mm	\$46.66	\$16.20
DX92712	DURALUX 9mm Fibre Cement, 2700 x 1200mm	\$52.49	\$16.20
DX93012	DURALUX 9mm Fibre Cement, 3000 x 1200mm	\$58.32	\$16.20
DX6309	DURALUX 6mm Fibre Cement, 3000 x 900mm	\$28.70	\$10.63
DX62412	DURALUX 6mm Fibre Cement, 2400 x 1200mm	\$30.62	\$10.63
DX62712	DURALUX 6mm Fibre Cement, 2700 x 1200mm	\$34.44	\$10.63
DX63012	DURALUX 6mm Fibre Cement, 3000 x 1200mm	\$38.27	\$10.63
DX63612	DURALUX 6mm Fibre Cement, 3600 x 1200mm	\$45.92	\$10.63

Duraliner Wet Area Lining

CODE	DESCRIPTION	\$/EACH	\$/M²
DL123012	DURALINER 12mm Fibre Cement, 3000x1200mm	\$97.55	\$26.44
DL92412	DURALINER 9mm Fibre Cement, 2400 x 1200mm	\$46.07	\$15.99
DL92712	DURALINER 9mm Fibre Cement, 2700 x 1200mm	\$51.84	\$15.99
DL93012	DURALINER 9mm Fibre Cement, 3000 x 1200mm	\$57.59	\$15.99
DL93612	DURALINER 9mm Fibre Cement, 3600 x 1200mm	\$69.12	\$15.99
DL62412	DURALINER 6mm Fibre Cement, 2400 x 1200mm	\$25.23	\$8.76
DL62712	DURALINER 6mm Fibre Cement, 2700 x 1200mm	\$28.39	\$8.76
DL63012	DURALINER 6mm Fibre Cement, 3000 x 1200mm	\$31.54	\$8.76
DL63612	DURALINER 6mm Fibre Cement, 3600 x 1200mm	\$37.86	\$8.76

Durasheet Eave Lining

CODE	DESCRIPTION	\$/EACH	\$/M²
DH6249	DURASHEET 6mm Fibre Cement, 2400 x 900mm	\$22.11	\$10.24
DH6309	DURASHEET 6mm Fibre Cement, 3000 x 900mm	\$27.64	\$10.24
DH61812	DURASHEET 6mm Fibre Cement, 1800 x 1200mm	\$22.11	\$10.24
DH62412	DURASHEET 6mm Fibre Cement, 2400 x 1200mm	\$29.48	\$10.24
DH62712	DURASHEET 6mm Fibre Cement, 2700 x 1200mm	\$33.17	\$10.24
DH63012	DURASHEET 6mm Fibre Cement, 3000 x 1200mm	\$36.85	\$10.24

Durafloor Flooring System

CODE	DESCRIPTION	\$/EACH	\$/M²
DF192256	DURAFLOOR 19mm Fibre Cement, 2250 x 600mm	\$73.92	\$54.75
DF19276	DURAFLOOR 19mm Fibre Cement, 2700 x 600mm	\$88.70	\$54.75

Compressed Fibre Cement

CODE	DESCRIPTION	\$/EACH	\$/M²
CM15249	COMPRESSED 15mm Fibre Cement, 2400 x 900mm	\$94.79	\$43.88
CM152412	COMPRESSED 15mm Fibre Cement, 2400 x 1200mm	\$126.38	\$43.88
CM18189	COMPRESSED 18mm Fibre Cement, 1800 x 900mm	\$77.74	\$47.99
CM181812	COMPRESSED 18mm Fibre Cement, 1800 x 1200mm	\$103.66	\$47.99
CM18249	COMPRESSED 18mm Fibre Cement, 2400 x 900mm	\$103.66	\$47.99
CM182412	COMPRESSED 18mm Fibre Cement, 2400 x 1200mm	\$138.21	\$47.99
CM242412	COMPRESSED 24mm Fibre Cement, 2400 x 1200mm	\$241.26	\$83.77

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





STEEL FRAMING

Steel Framing Systems for Cladding

Studtek Facade System

CODE	DESCRIPTION	\$/EACH	\$/ML
SZ1203560	STUDTEK 120 x 35mm Flurozinc Joint Top-hat, 6.0m Length	\$44.64	\$7.44
SZ503560	STUDTEK 50 x 35mm Flurozinc Intermediate Top-hat, 6.0m	\$30.24	\$5.04
SZA757560	STUDTEK 75 x 75mm Flurozinc Corner Angle, 6.0m Length	\$37.75	\$6.29
SCC60	STUDTEK 35 x 35mm Black Cavity Closer, 6.0m Length	\$44.45	\$7.41
SJS359	STUDTEK 67 x 3.5mm Black Backing Strip, 3.59m Length	\$5.12	\$1.43
SJS299	STUDTEK 67 x 3.5mm Black Backing Strip, 2.99m Length	\$4.27	\$1.43
GASKETS	STUDTEK Foam Gaskets for Joint Top-hats	Page 106	-

Studtek Top-hat Purlins

CODE	DESCRIPTION	\$/EACH	\$/LM
SGT50**	STUDTEK 50mm Top-hat Purlin, Custom Lengths	\$29.74	\$4.96
SGT6460	STUDTEK 64mm Top-hat Purlin, 6.0m Length	\$34.36	\$5.73
SGT7560	STUDTEK 75mm Top-hat Purlin, 6.0m Length	\$38.56	\$6.43
SGT96**	STUDTEK 96mm Top-hat Purlin, Custom Lengths	\$47.29	\$7.88
SGT120**	STUDTEK 120mm Top-hat Purlin, Custom Lengths	\$59.39	\$9.90

Product Range



All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

Studtek Cladding Top-hats

CODE	DESCRIPTION	\$/EACH	\$/LM
SG1203560	STUDTEK 120 x 35mm Joint Top-hat, 6.0m Length	\$40.24	\$6.71
SG753560	STUDTEK 75 x 35mm Top-hat, 6.0m Length	\$33.01	\$5.50
SG751560	STUDTEK 75 x 15mm Top-hat, 6.0m Length	\$25.79	\$4.30
SG505060	STUDTEK 50 x 50mm Top-hat, 6.0m Length	\$33.01	\$5.50
SG503560	STUDTEK 50 x 35mm Top-hat, 6.0m Length	\$26.50	\$4.42
SG502436	STUDTEK 50 x 35mm Top-hat, 3.6m Length	\$15.90	\$4.42
SG502460	STUDTEK 50 x 24mm Top-hat, 6.0m Length	\$22.76	\$3.79
SG501560	STUDTEK 50 x 15mm Top-hat, 6.0m Length	\$18.76	\$3.13
SG501536	STUDTEK 50 x 15mm Top-hat, 3.6m Length	\$11.25	\$3.13

Studtek C-channel Framing

CODE	DESCRIPTION	\$/EACH	\$/LM
SG653060	STUDTEK 65 x 30mm C-channel, 6.0m Length	\$22.76	\$3.79

Studtek Angles

CODE	DESCRIPTION	\$/EACH	\$/LM
SZA757560	STUDTEK 75 x 75mm 1.15BMT Angle, 6.0m Length	\$37.75	\$6.29
SGA505036	STUDTEK 50 x 50mm 0.75BMT Angle, 3.6m Length	\$8.25	\$2.29
SGA353536	STUDTEK 35 x 35mm 0.75BMT Angle, 3.6m Length	\$5.75	\$1.60
SGA252536	STUDTEK 25 x 25mm 0.75BMT Angle, 3.6m Length	\$4.89	\$1.36

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.



EXTRUSIONS

Aluminium Framing & Cladding Extrusions

Ultrazed Cassette Panel Extrusions


CODE	DESCRIPTION	\$/EACH	\$/LM
UZLW58	ULTRAZED 24mm Long Z-angle (White Finish), 5.8m	\$8.66	\$1.49
UZSM58	ULTRAZED 22mm Short Z-angle (Mill Finish), 5.8m	\$8.66	\$1.49
US4020	ULTRASTIFF 40 x 20mm Panel Stiffener (Mill Finish), 6.0m	\$36.26	\$6.04

Nvelope Aluminium Framing System

CODE	DESCRIPTION	\$/EACH	\$/LM
NVT4060	NVELOPE 40mm Vertical T-Rail, 6.0m Length	\$77.88	\$12.98
NVT6060	NVELOPE 60mm Vertical T-Rail, 6.0m Length	\$88.38	\$14.73
NVL6060	NVELOPE 60mm Vertical L-Rail, 6.0m Length	\$50.91	\$8.49
NV3CR60	NVELOPE NV3 Carrier Rail, 6.0m Length	\$67.82	\$11.30
NV3TSLH	NVELOPE NV3 TUF-S Leveling Hanger	\$4.35	-
NV3TSSH	NVELOPE NV3 TUF-S Static Hanger	\$3.34	-
NVBS40	NVELOPE 40mm Single Bracket (6.5/11mm holes)	\$8.03	-
NVBD40	NVELOPE 40mm Double Bracket (11mm hole)	\$11.84	-
NVBS60	NVELOPE 60mm Single Bracket (6.5/11mm holes)	\$8.50	-
NVBD60	NVELOPE 60mm Double Bracket (11mm hole)	\$11.80	-
NVS2055	NVELOPE 20mm x 5.5g Universal Fixing Screw, 500 Pack	\$296.99	\$0.59
FIXINGS	TUF-S Concealed Anchors to Suit NV3	Page 110	-



Cladtrim Aluminium Cladding Trims

CODE	DESCRIPTION	\$/EACH	\$/LM
CTMSS	CLADTRIM J-shape Starter Strip, 5.5m Length	\$21.71	\$3.95
CTMYP	CLADTRIM Y-shape Corner Profile, 5.5m Length	\$44.83	\$8.15
CTMZPET	CLADTRIM Z-shape Joint Profile, 5.5m Length	\$32.13	\$5.84
CTMCP	CLADTRIM 40mm 2-piece Corner Profile, 5.5m Length	\$62.38	\$11.34
CTMCS	CLADTRIM 40mm 2-piece Cover Strip, 5.5m Length	\$36.50	\$6.64
CTMZPET	CLADTRIM 40mm 2-piece Edge Trim, 5.5m Length	\$32.13	\$5.84
CTM5050	CLADTRIM 50 x 50mm Angle, 6.5m Length	\$29.91	\$4.60
CTM4040	CLADTRIM 40 x 40mm Angle, 6.5m Length	\$25.52	\$3.93
CTM4020	CLADTRIM 40 x 20mm Angle, 5.8m Length	\$17.09	\$2.95
CTM3232	CLADTRIM 32 x 32mm Angle, 6.5m Length	\$22.01	\$3.39
CTM32ES	CLADTRIM 32 x 32mm End Stop, 6.5m Length	\$36.04	\$5.54
CTM2020	CLADTRIM 20 x 20mm Angle, 5.8m Length	\$11.39	\$1.96

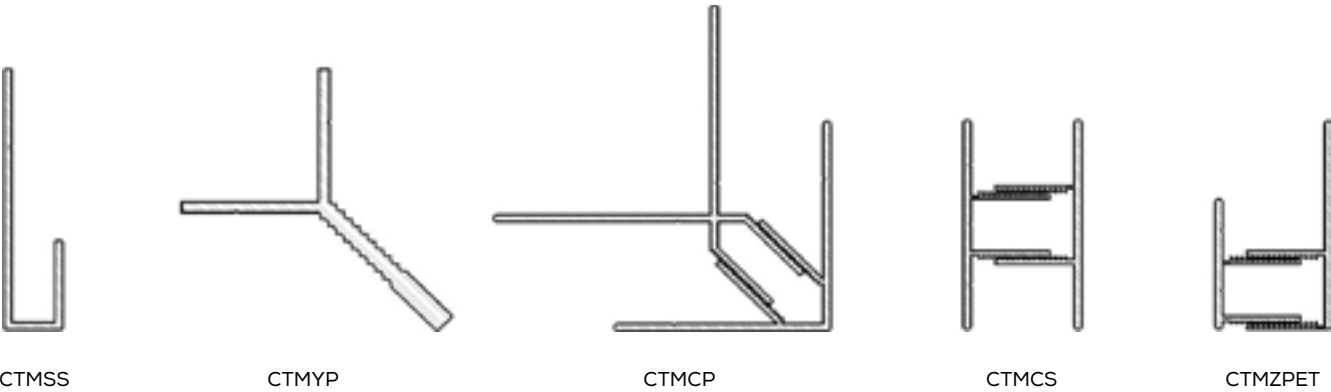

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

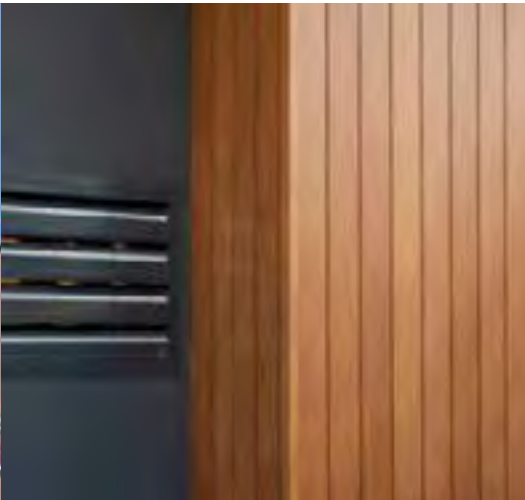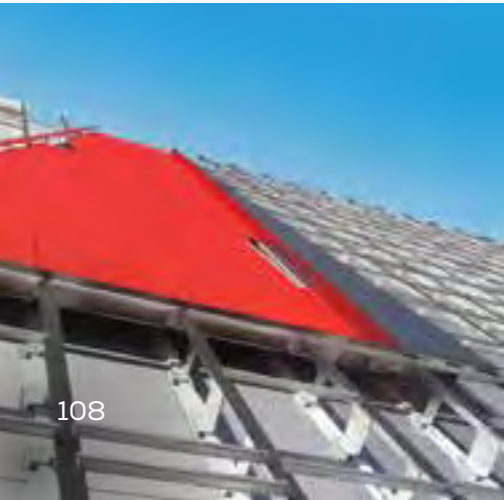

FASTENERS

Specialised Cladding & Decking Fixings

TUF-S Concealed Anchors

CODE	DESCRIPTION	\$/PACK	\$/EACH
TS6CA9	TUF-S 9mm D6 Concealed Anchor, 500 Pack	\$1415.70	\$2.83
TS6CA12	TUF-S 12mm D6 Concealed Anchor, 500 Pack	\$1415.70	\$2.83

Colourfix Cladding Rivet System

CODE	DESCRIPTION	\$/PACK	\$/EACH
CFR14	COLOURFIX 14mm D15 Rivet (Colour), 250 Pack	\$349.51	\$1.40
CFR18	COLOURFIX 18mm D15 Rivet (Colour), 250 Pack	\$379.03	\$1.52
CFR22	COLOURFIX 22mm D15 Rivet (Colour), 250 Pack	\$317.69	\$1.27
CFFPS	COLOURFIX 8.4mm Fixed Point Rivet Sleeve, 200 Pack	\$354.36	\$1.77

Colourfix Cladding Metal Screws

CODE	DESCRIPTION	\$/PACK	\$/EACH
CFM25	COLOURFIX 25mm Metal Screw (Colour), 250 Pack	\$340.31	\$1.36
CFM30	COLOURFIX 30mm Metal Screw (Colour), 250 Pack	\$340.31	\$1.36
CFMW30	COLOURFIX 30mm Screw & Washer (Colour), 250 Pack	\$340.31	\$1.36

Colourfix Cladding Timber Screws

CODE	DESCRIPTION	\$/PACK	\$/EACH
CFT25	COLOURFIX 25mm Timber Screw (Colour), 250 Pack	\$317.64	\$1.27
CFT38	COLOURFIX 38mm Timber Screw (Colour), 250 Pack	\$299.66	\$1.20
CFTW38	COLOURFIX 38mm Screw & Washer (Colour), 250 Pack	\$317.64	\$1.27

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.




Stowaway Secret Fix Clip System for Decking

CODE	DESCRIPTION	\$/PACK	\$/EACH
RST507	STOWAWAY Secret Fix Clip with Timber Screw, 150 Pack	\$97.82	\$0.652
RSCLIP	STOWAWAY Secret Fix Clip (To Suit BHM427), 200 Pack	\$93.16	\$0.466
BHT507	BLACKHEAD 50mm x 7g Timber Screw, 200 Pack	\$34.38	\$0.172
BHM427	BLACKHEAD 42mm x 7g Metal Screw, 200 Pack	\$42.55	\$0.213

Pro Plug Secret Fix Plug System For Decking

CODE	DESCRIPTION	\$/PACK	\$/EACH
SBM4010	STARBORN 40mm x 10g Metal Screw, 375 Pack	\$232.79	\$0.621
SBT6510	STARBORN 65mm x 10g Timber Screw, 375 Pack	\$232.79	\$0.621
PP*****	PRO PLUG Secret Fix Plug (Insert Colour), 375 Pack	\$106.22	\$0.283


Pro Plug Colour Chart

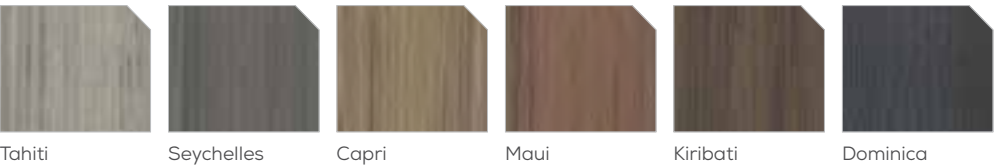

TUF-S & Colourfix Specialised Tools

CODE	DESCRIPTION	\$/PACK	\$/EACH
TOOLS	TUF-S & Colourfix Tools	Page 119	-

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

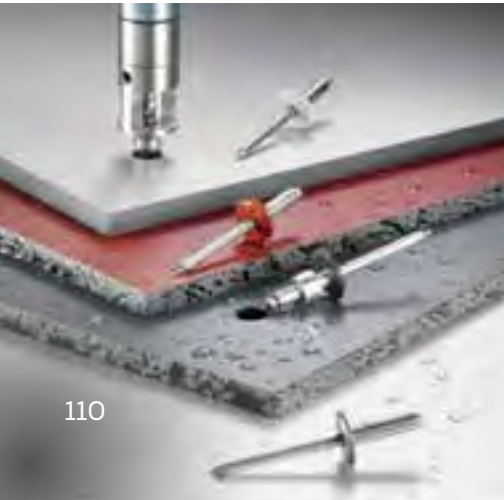

FASTENERS

Standard Cladding & Decking Fixings

Bluechip Cladding Screws

CODE	DESCRIPTION	\$/PACK	\$/EACH
GVHEX16	GALVANISED 16mm x 10-16 Hex Head, 1000 Pack	\$33.52	\$0.034
GVWFR22	GALVANISED 22mm x 10-16 Wafer Screw, 1000 Pack	\$32.85	\$0.033
GVCSK30	GALVANISED 30mm x 10-16 Countersunk Screw, 1000 Pack	\$46.28	\$0.046
GVM308	GALVANISED 30mm x 8g Metal Screw, 200 Pack	\$13.19	\$0.066
SST326	STAINLESS 32mm x 6g Timber Screw, 200 Pack	\$11.98	\$0.060

Bluechip Decking Screws

CODE	DESCRIPTION	\$/PACK	\$/EACH
BHM427	BLACKHEAD 42mm x 7g Metal Screw, 200 Pack	\$42.55	\$0.213
BHT507	BLACKHEAD 50mm x 7g Timber Screw, 200 Pack	\$34.38	\$0.172
GVM4010	GALVANISED 40mm x 10g Metal Screw, 200 Pack	\$18.06	\$0.090
GVM6514	GALVANISED 65mm x 14g Metal Screw, 200 Pack	\$55.08	\$0.275
SST5010	STAINLESS 50mm x 10g Timber Screw, 200 Pack	\$27.30	\$0.137
SST6514	STAINLESS 65mm x 14g Timber Screw, 200 Pack	\$67.15	\$0.336

Product Range



GVHEX16



GVWFR22



GVCSK30



GVM308



SST326



BHM427



BHT507



GVM4010



SST5010



GVM6514



SST6514

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.



Horseshoe Packers

CODE	DESCRIPTION	\$/PACK	\$/EACH
BPB10	BLUECHIP 75 x 1mm Packers (Small Bag), 400 Pack	\$28.14	\$0.070
BPB30	BLUECHIP 75 x 3mm Packers (Small Bag), 200 Pack	\$15.01	\$0.075
BPB50	BLUECHIP 75 x 5mm Packers (Small Bag), 160 Pack	\$14.96	\$0.094
BPB100	BLUECHIP 75 x 10mm Packers (Small Bag), 60 Pack	\$10.90	\$0.182
BP10	BLUECHIP 75 x 1mm Packers, 4000 Pack	\$200.06	\$0.050
BP30	BLUECHIP 75 x 3mm Packers, 2000 Pack	\$106.76	\$0.053
BP50	BLUECHIP 75 x 5mm Packers, 1600 Pack	\$106.45	\$0.067
BP100	BLUECHIP 75 x 10mm Packers, 600 Pack	\$77.55	\$0.129

Soffit Insulation Fasteners

CODE	DESCRIPTION	\$/PACK	\$/EACH
SIF30	IBOARD 27-36mm Soffit Insulation Fastener, 300 Pack	\$261.18	\$0.871
SIF35	IBOARD 37-46mm Soffit Insulation Fastener, 300 Pack	\$285.12	\$0.950
SIF40	IBOARD 47-56mm Soffit Insulation Fastener, 300 Pack	\$310.32	\$1.034
SIF50	IBOARD 57-66mm Soffit Insulation Fastener, 300 Pack	\$336.06	\$1.120
SIF60	IBOARD 67-76mm Soffit Insulation Fastener, 200 Pack	\$238.32	\$1.192
SIF75	IBOARD 77-96mm Soffit Insulation Fastener, 200 Pack	\$261.96	\$1.310
SIF100	IBOARD 97-116mm Soffit Insulation Fastener, 200 Pack	\$291.36	\$1.457

Cavity Retainer Clips

CODE	DESCRIPTION	\$/PACK	\$/EACH
IUC250	IBOARD Universal Cavity Retainer Clip, 250 Pack	\$171.88	\$0.688

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





SARKING & INSULATION

Membranes, PIR & Rockwool Insulation

Insulark Wall Wrap

CODE	DESCRIPTION	\$/EACH	\$/M²
ISS13560	INSULSARK Waterproof Membrane, 1.35 x 60m Roll	\$79.98	\$0.99
ISB13560	INSULSARK Perforated Membrane, 1.35 x 60m Roll	\$79.98	\$0.99
ISM15030	INSULSARK Vapour Permeable Membrane, 1.5 x 30m Roll	\$68.13	\$1.51

Firespan Non-combustible Sarking

CODE	DESCRIPTION	\$/EACH	\$/M²
FSS12540	FIRESpan Waterproof Membrane, 1.25 x 40m Roll	\$249.00	\$4.98
FSB12540	FIRESpan Perforated Membrane, 1.25 x 40m Roll	\$249.00	\$4.98

Insulblue Foam Insulation

CODE	R-VALUE	DESCRIPTION	\$/EACH	\$/M²
IFX413522	R0.10	INSULBLUE 4mm Foam Insulation, 1.35 x 22.25m	\$148.77	\$4.96
IFX613522	R0.17	INSULBLUE 6.5mm Foam Insulation, 1.35 x 22.25m	\$185.62	\$6.19
IFX813522	R0.20	INSULBLUE 8mm Foam Insulation, 1.35 x 22.25m	\$209.07	\$6.97
ICS6060	NA	INSULBLUE 60 x 60 x 20mm Cavity Spacers, 50 Pack	\$11.56	-

Proclima Vapour Permeable Membrane

CODE	DESCRIPTION	\$/EACH	\$/M²
PCM15036	PROCLIMA Vapour Permeable Membrane, 1.5 x 36.5m Roll	\$179.05	\$3.27
TAPES	INSULTAPE Full Range of Specialised Tapes	Page 116	-

Siniat WD Rigid Air Barrier

CODE	DESCRIPTION	\$/EACH	\$/M²
SWD2412	SINIAT WD 13mm Rigid Air Barrier Board, 2400 x 1200mm	\$52.48	\$18.22
SWDS60	SINIAT WD Fireblock XT Sealant, 600ml Sausage	\$18.36	-
SWDM38	SINIAT WD 38mm Self Drilling Metal Screw, 1000 Pack	\$54.53	-
SWDT42	SINIAT WD 42mm High Thread Timber Screw, 1000 Pack	\$54.53	-

Iboard Foil-faced PIR Insulation

CODE	R-VALUE	DESCRIPTION	\$/EACH	\$/M²
IBS302312	R1.36	IBOARD 30mm Rigid Insulation, 2270 x 1200mm	\$47.06	\$17.39
IBS402312	R1.82	IBOARD 40mm Rigid Insulation, 2270 x 1200mm	\$58.95	\$21.64
IBS502312	R2.27	IBOARD 50mm Rigid Insulation, 2270 x 1200mm	\$69.69	\$25.58
IBS602312	R2.73	IBOARD 60mm Rigid Insulation, 2270 x 1200mm	\$92.39	\$33.92
IBS702312	R3.18	IBOARD 70mm Rigid Insulation, 2270 x 1200mm	\$103.43	\$37.97
IBS802312	R3.64	IBOARD 80mm Rigid Insulation, 2270 x 1200mm	\$113.39	\$41.63
IBS902312	R4.09	IBOARD 90mm Rigid Insulation, 2270 x 1200mm	\$124.43	\$45.68
IBS1002312	R4.55	IBOARD 100mm Rigid Insulation, 2270 x 1200mm	\$134.40	\$49.34

Irock Non-combustible Rockwool Insulation

CODE	R-VALUE	DESCRIPTION	\$/EACH	\$/M²
IR402312	R1.14	IROCK 40mm Rockwool Board, 2270 x 1200mm	\$37.67	\$13.83
IR602312	R1.71	IROCK 60mm Rockwool Board, 2270 x 1200mm	\$56.52	\$20.75
IR802312	R2.29	IROCK 80mm Rockwool Board, 2270 x 1200mm	\$76.29	\$28.01
IR1002312	R2.86	IROCK 100mm Rockwool Board, 2270 x 1200mm	\$94.31	\$34.62

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





TAPES & ADHESIVES

Specialist Facade Products

Studtek Foam Joint Gaskets

CODE	DESCRIPTION	\$/EACH	\$/LM
TFG4048	STUDTEK 40 x 4.8mm EPDM Vertical Joint Gasket, 15m Roll	\$67.30	\$4.89
TFG4032	STUDTEK 40 x 3.2mm EPDM Vertical Joint Gasket, 25m Roll	\$62.36	\$2.49
TFG1232	STUDTEK 12 x 3.2mm EPDM Intermediate Gasket, 25m Roll	\$29.87	\$1.19

Bluechip Double-sided Tape

CODE	DESCRIPTION	\$/EACH	\$/LM
TT707815	BLUECHIP 7078 ACXplus 15mm Panel Tape, 18m Roll	\$36.69	\$2.04
TT704412	BLUECHIP 7044 ACXplus 12mm Stiffener Tape, 25m Roll	\$22.83	\$0.91
TT60040	BLUECHIP Tesa Industry Cleaner, 500ml Can	\$16.76	-
TT60149	BLUECHIP Tesa Abrasive Pads, 150 Pack	\$263.34	-
TT60150	BLUECHIP Tesa Adhesion Promoter, 100ml Can	\$17.37	-

Insultape Specialised Facade Tape

CODE	DESCRIPTION	\$/EACH	\$/LM
ITB4830	INSULTAPE 48mm Black Isolation Tape, 30m Roll	\$16.20	\$0.54
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	\$9.95	\$0.20
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	\$19.88	\$0.40
ITH6030	INSULTAPE 60mm High Tack Sarking Tape, 30m Roll	\$14.35	\$0.48
ITS6030	INSULTAPE 60mm Proclima / Siniat Tape, 30m Roll	\$47.41	\$1.58
ITS15020	INSULTAPE 150mm Proclima / Siniat Sill Tape, 20m Roll	\$113.93	\$5.70

SikaTack Adhesive System

CODE	DESCRIPTION	\$/BOX	\$/UNIT
SKP5060	BLUECHIP SikaTack Panel-50 Adhesive, 600ml Sausage	POA	POA
SKP2060	BLUECHIP SikaTack Panel-20 Adhesive, 600ml Sausage	\$406.00	\$20.30
SKP1060	BLUECHIP SikaTack Panel-10 Adhesive, 600ml Sausage	\$281.60	\$14.08
SKPT	BLUECHIP SikaTack 12 x 3.3mm Panel Tape, 33m Roll	\$23.57	-
SKA100100	BLUECHIP SikaTack Aktivator 100, 1 Litre	\$25.61	-
SKP206100	BLUECHIP SikaTack Primer 206 G&P, 1 Litre	\$113.73	-
SKP215100	BLUECHIP SikaTack Primer 215, 1Litre	\$111.14	-
SKPCA	BLUECHIP Sika Foam Pads, 168 Pack	\$86.08	-

Sikaflex 11FC Adhesive

CODE	DESCRIPTION	\$/BOX	\$/UNIT
SK11FCB60	BLUECHIP Sikaflex 11FC Black, 600ml Sausage	\$358.00	\$17.90
SK11FCW60	BLUECHIP Sikaflex 11FC White, 600ml Sausage	\$358.00	\$17.90
SK11FCG60	BLUECHIP Sikaflex 11FC Grey, 600ml Sausage	\$358.00	\$17.90

Product Range




SKP2060 SKP1060 SKPT SKA100100 SKP206100 SKP215100 SK11FCW60 BP541B



TFG4048 TT707815 TT704412 ITR4850 ITR9650

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

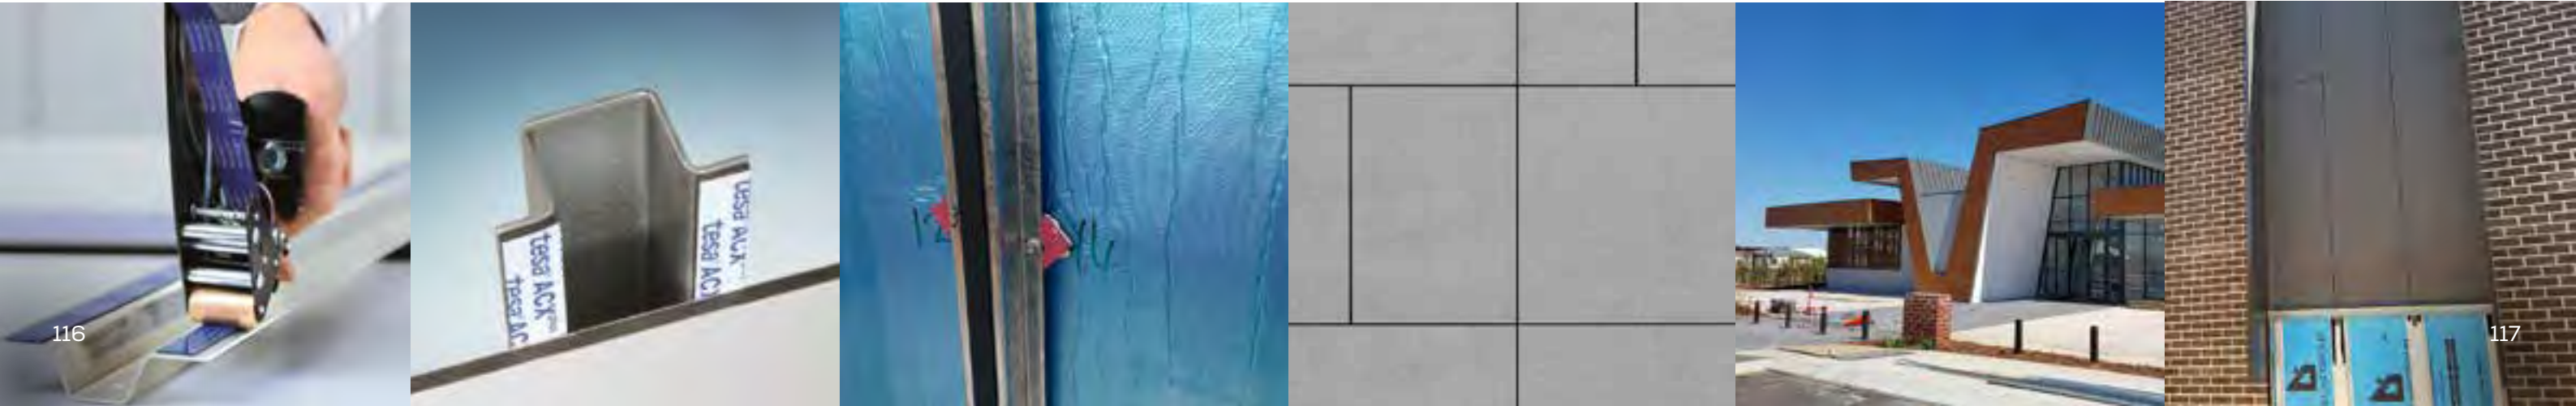

SEALANTS & TOOLS

Specialist Facade Products

Prolastik NC Silicone Sealant

CODE	DESCRIPTION	\$/BOX	\$/UNIT
PKNCB60	PROLASTIK NC Silicone Matt Black, 600ml Sausage	\$179.40	\$8.97
PKNCW60	PROLASTIK NC Silicone Matt White, 600ml Sausage	\$179.40	\$8.97
PKNCG60	PROLASTIK NC Silicone Matt Grey, 600ml Sausage	\$179.40	\$8.97

Prosil 41 Silicone Sealant

CODE	DESCRIPTION	\$/BOX	\$/UNIT
PS41B60	BLUECHIP Prosil 41 Matt Black, 600ml Sausage	\$229.20	\$11.46
PS41W60	BLUECHIP Prosil 41 Matt White, 600ml Sausage	\$229.20	\$11.46
PS41G60	BLUECHIP Prosil 41 Matt Grey, 600ml Sausage	\$229.20	\$11.46

Sikaflex PRO Polyurethane Sealant

CODE	DESCRIPTION	\$/BOX	\$/UNIT
SKPRB60	BLUECHIP Sikaflex PRO Black, 600ml Sausage	\$179.00	\$8.95
SKPRW60	BLUECHIP Sikaflex PRO White, 600ml Sausage	\$179.00	\$8.95
SKPRC60	BLUECHIP Sikaflex PRO Concrete Grey, 600ml Sausage	\$179.00	\$8.95
SKPRD60	BLUECHIP Sikaflex PRO Dark Grey, 600ml Sausage	\$179.00	\$8.95

Bluechip Foam Backing Rod

CODE	DESCRIPTION	\$/EACH	\$/LM
BBR010	BLUECHIP 10mm Open Cell Backing Rod, 200m Roll	\$62.61	\$0.32
BBR015	BLUECHIP 15mm Open Cell Backing Rod, 150m Roll	\$62.61	\$0.42
BBRC15	BLUECHIP 15mm Closed Cell Backing Rod, 50m Roll	\$22.50	\$0.45

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

Equitone Tools

CODE	DESCRIPTION	\$/TOOL	\$/EACH
EQCB	EQUITONE 160mm Cutting Blade	\$348.95	-
EQDB11	EQUITONE 11mm Rivet Fix Drill Bit	\$128.37	-
EQDB7	EQUITONE 7mm Screw Fix Drill Bit	\$166.03	-
EQDB41	EQUITONE 4.1mm Replacement Bit (To Suit EQUCT)	\$25.38	-
EQUCT	EQUITONE Uni Rivet Centralising Toll	\$386.37	-
EQUNP	EQUITONE Uni Rivet Protection Nose Piece	\$182.88	-
EQLAK	LUKO Applicator Kit (To Suit Edge Sealant)	\$47.28	-

TUF-S Tools

CODE	DESCRIPTION	\$/TOOL	\$/EACH
TS6DB9	TUF-S Drill Bit for 9mm Anchor (Use with TSUDL)	\$180.90	-
TS6DB12	TUF-S Drill Bit for 12mm Anchor (Use with TSUDL)	\$180.90	-
TSUDL	TUF-S Universal Depth Locator Tool	\$365.72	-









Colourfix Tools

CODE	DESCRIPTION	\$/TOOL	\$/EACH
CFDB85	COLOURFIX 8.5mm Rivet Fix Drill Bit	\$138.50	-
CFDB51	COLOURFIX 5.1mm Replacement Bit (To Suit CFCT8)	\$30.23	-
CFCT8	COLOURFIX 8mm Centralising Tool	\$227.08	-
CFBIT	COLOURFIX Screw Driver Bit, 10 Pack	\$27.44	\$2.74

Bluechip Tools

CODE	DESCRIPTION	\$/TOOL	\$/EACH
SBCSK	BLUECHIP Smartbit CFC Countersinking Tool	\$74.72	-
GPABRG	BLUECHIP Gesipa Accubird Rivet Gun Kit	\$1350.00	-
GPPBRG	BLUECHIP Gesipa Powerbird Rivet Gun Kit	\$1875.00	-

Product Range

							
EQCB	EQDB11	EQDB41 & EQUCT	EQUNP	EQLAK	TS6DB & TSUDL	SBCSK	GPABRG & GPPBRG

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





SERVICE CHARGES

Delivery, Surcharges & Miscellaneous

Delivery & Handling Charges

CODE	DESCRIPTION	\$/EACH
BCUTE	DELIVERY Perth Metropolitan Ute (Per Drop)	\$55.00
BCTRUCK	DELIVERY Perth Metropolitan Truck No Crane (Per Drop)	\$150.00
BCHIAB	DELIVERY Perth Metropolitan Hiab with Crane (Per Drop)	\$175.00
BCFREIGHT	DELIVERY Freight Outside Perth Metropolitan Ute (Per Drop)	POA
BCPALLET	PALLET CHARGE Credit for Pallets Returned in Good Order	\$75.00

Surcharge & Fees

CODE	DESCRIPTION	\$/EACH
BCCCS0.3	SURCHARGE 0.3% Debit Card Transaction Fee	0.3%
BCCCS1.2	SURCHARGE 1.2% Credit Card Transaction Fee	1.2%
EQDBRG	EQUITONE 11mm Drill Bit Regrind Tool Service	\$80.00
BGRESTOCK	RESTOCKING FEE 20% handling Fee (Stock Product Only)	20%

Miscellaneous Codes

CODE	DESCRIPTION
BCDEPOSIT	DEPOSIT 30% Required for Non-stock Products and Custom Orders
BCDISCLAIM	DISCLAIMER All Materials Supplied to any Project will be Invoiced at Quoted Rates

Architectural Products – Indicative Budget Rates Only

BRAND	DESCRIPTION	SYSTEM COST	SUPPLY & INSTALL
ULTRACORE	Non-combustible Aluminium Core Panel	\$120/m²	\$320/m²
ULTRABOND	Fire Resistant Aluminium Composite Panel	\$100/m²	\$300/m²
ULTRASURE	Prefinished Solid Aluminium Panel	\$140/m²	\$420/m²
ULTRANAMEL	Vitreous Enamel Panel	\$440/m²	\$540/m²
ULTRALIGN	Aluminium Cladding & Battens	\$190/m²	\$260/m²
EQUITONE	Through-colour Fibre Cement Panel	\$150/m²	\$350/m²
NATURION	Non-combustible Natural Finish Panel	\$150/m²	\$350/m²
ULTRAPEARL	Prefinished Fibre Cement Panel	\$160/m²	\$280/m²
TERRAFACE	Terracotta Cladding System	\$200/m²	\$400/m²
CEDRAL	Prefinished Fibre Cement Weatherboards	\$90/m²	\$180/m²
ULTRAWOOD	Non-combustible Timber Cladding	\$190/m²	\$260/m²
FUNDERMAX	High Pressure Laminate Panel	\$160/m²	\$340/m²
SELEKTA	Timber Composite Cladding	\$190/m²	\$260/m²
RITECLAD	Through-colour Composite Cladding	\$260/m²	\$340/m²
RITESCREEN	Through-colour Composite Screening	\$160/m²	\$240/m²
TRAXION	Mineral-Fibre Composite Decking	\$260/m²	\$360/m²
RITEDECK	Through-colour Composite Decking	\$200/m²	\$300/m²
RITEBOARD	Heavy Duty Composite Decking	\$280/m²	\$380/m²
IBOARD G1	Group 1 Insulated Soffit Lining	\$50/m²	\$70/m²
IBOARD P17	Insulated Plasterboard Lining	\$50/m²	\$70/m²

Due to the large number of variations and/or applications for all the above products the above pricing is indicative only and may not be applicable to all finishes. Please contact our sales team for project specific quotations for all the above products to confirm accurate pricing, lead times and project specific system discounts that may apply.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.

All prices are exclusive of GST and subject to change. Please call us for project specific quotes to confirm availability.





We've Got It Covered

V1020



Blue Chip Group Pty Ltd
P 1300 945 123
E sales@bluechipgroup.net.au

NSW Office
5 Millennium Court
Silverwater NSW 2128

VIC Office
Level 1, 850 Collins Street
Docklands VIC 3000

WA Office
16 Ashby Close
Forrestfield WA 6058

DISCLAIMER No information or advice contained in this publication is binding in any way shape or form and is provided on a without prejudice basis. All photographs and colour swatches are indicative only. All dimensions are nominal and all product data and specifications are subject to change without notice. All pricing, sales, communications and transactions are subject to Blue Chip Group's terms of trading which are available on request.