




BLUECHIP

Timber Cladding

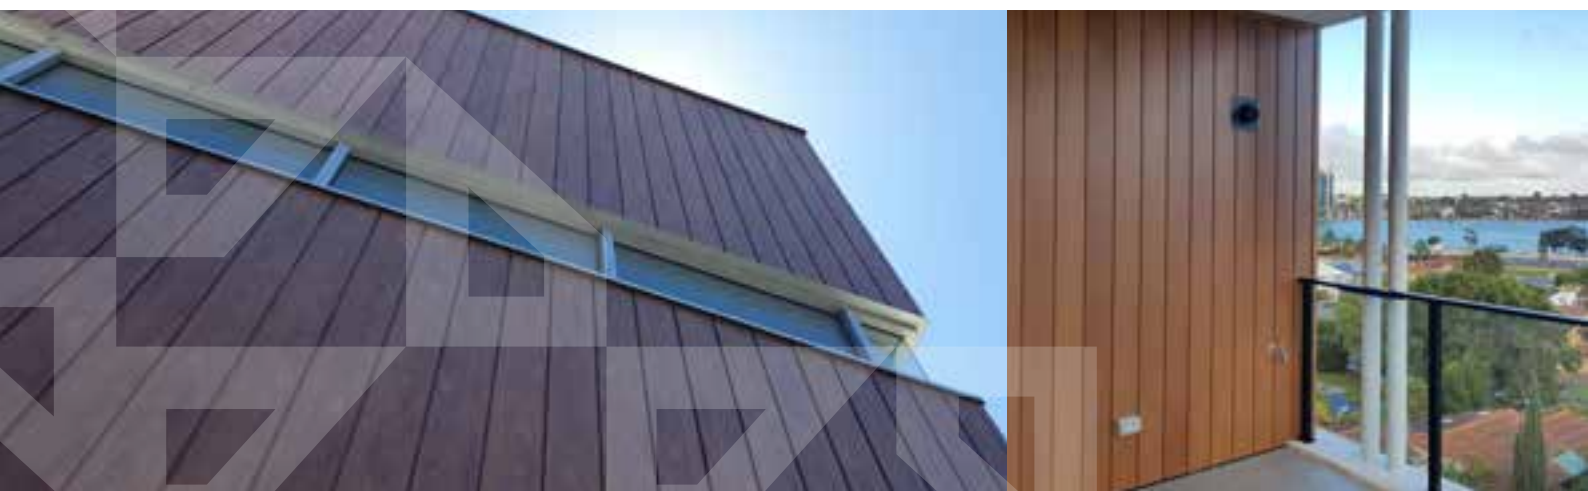


Timber Cladding



www.bluechipgroup.net.au



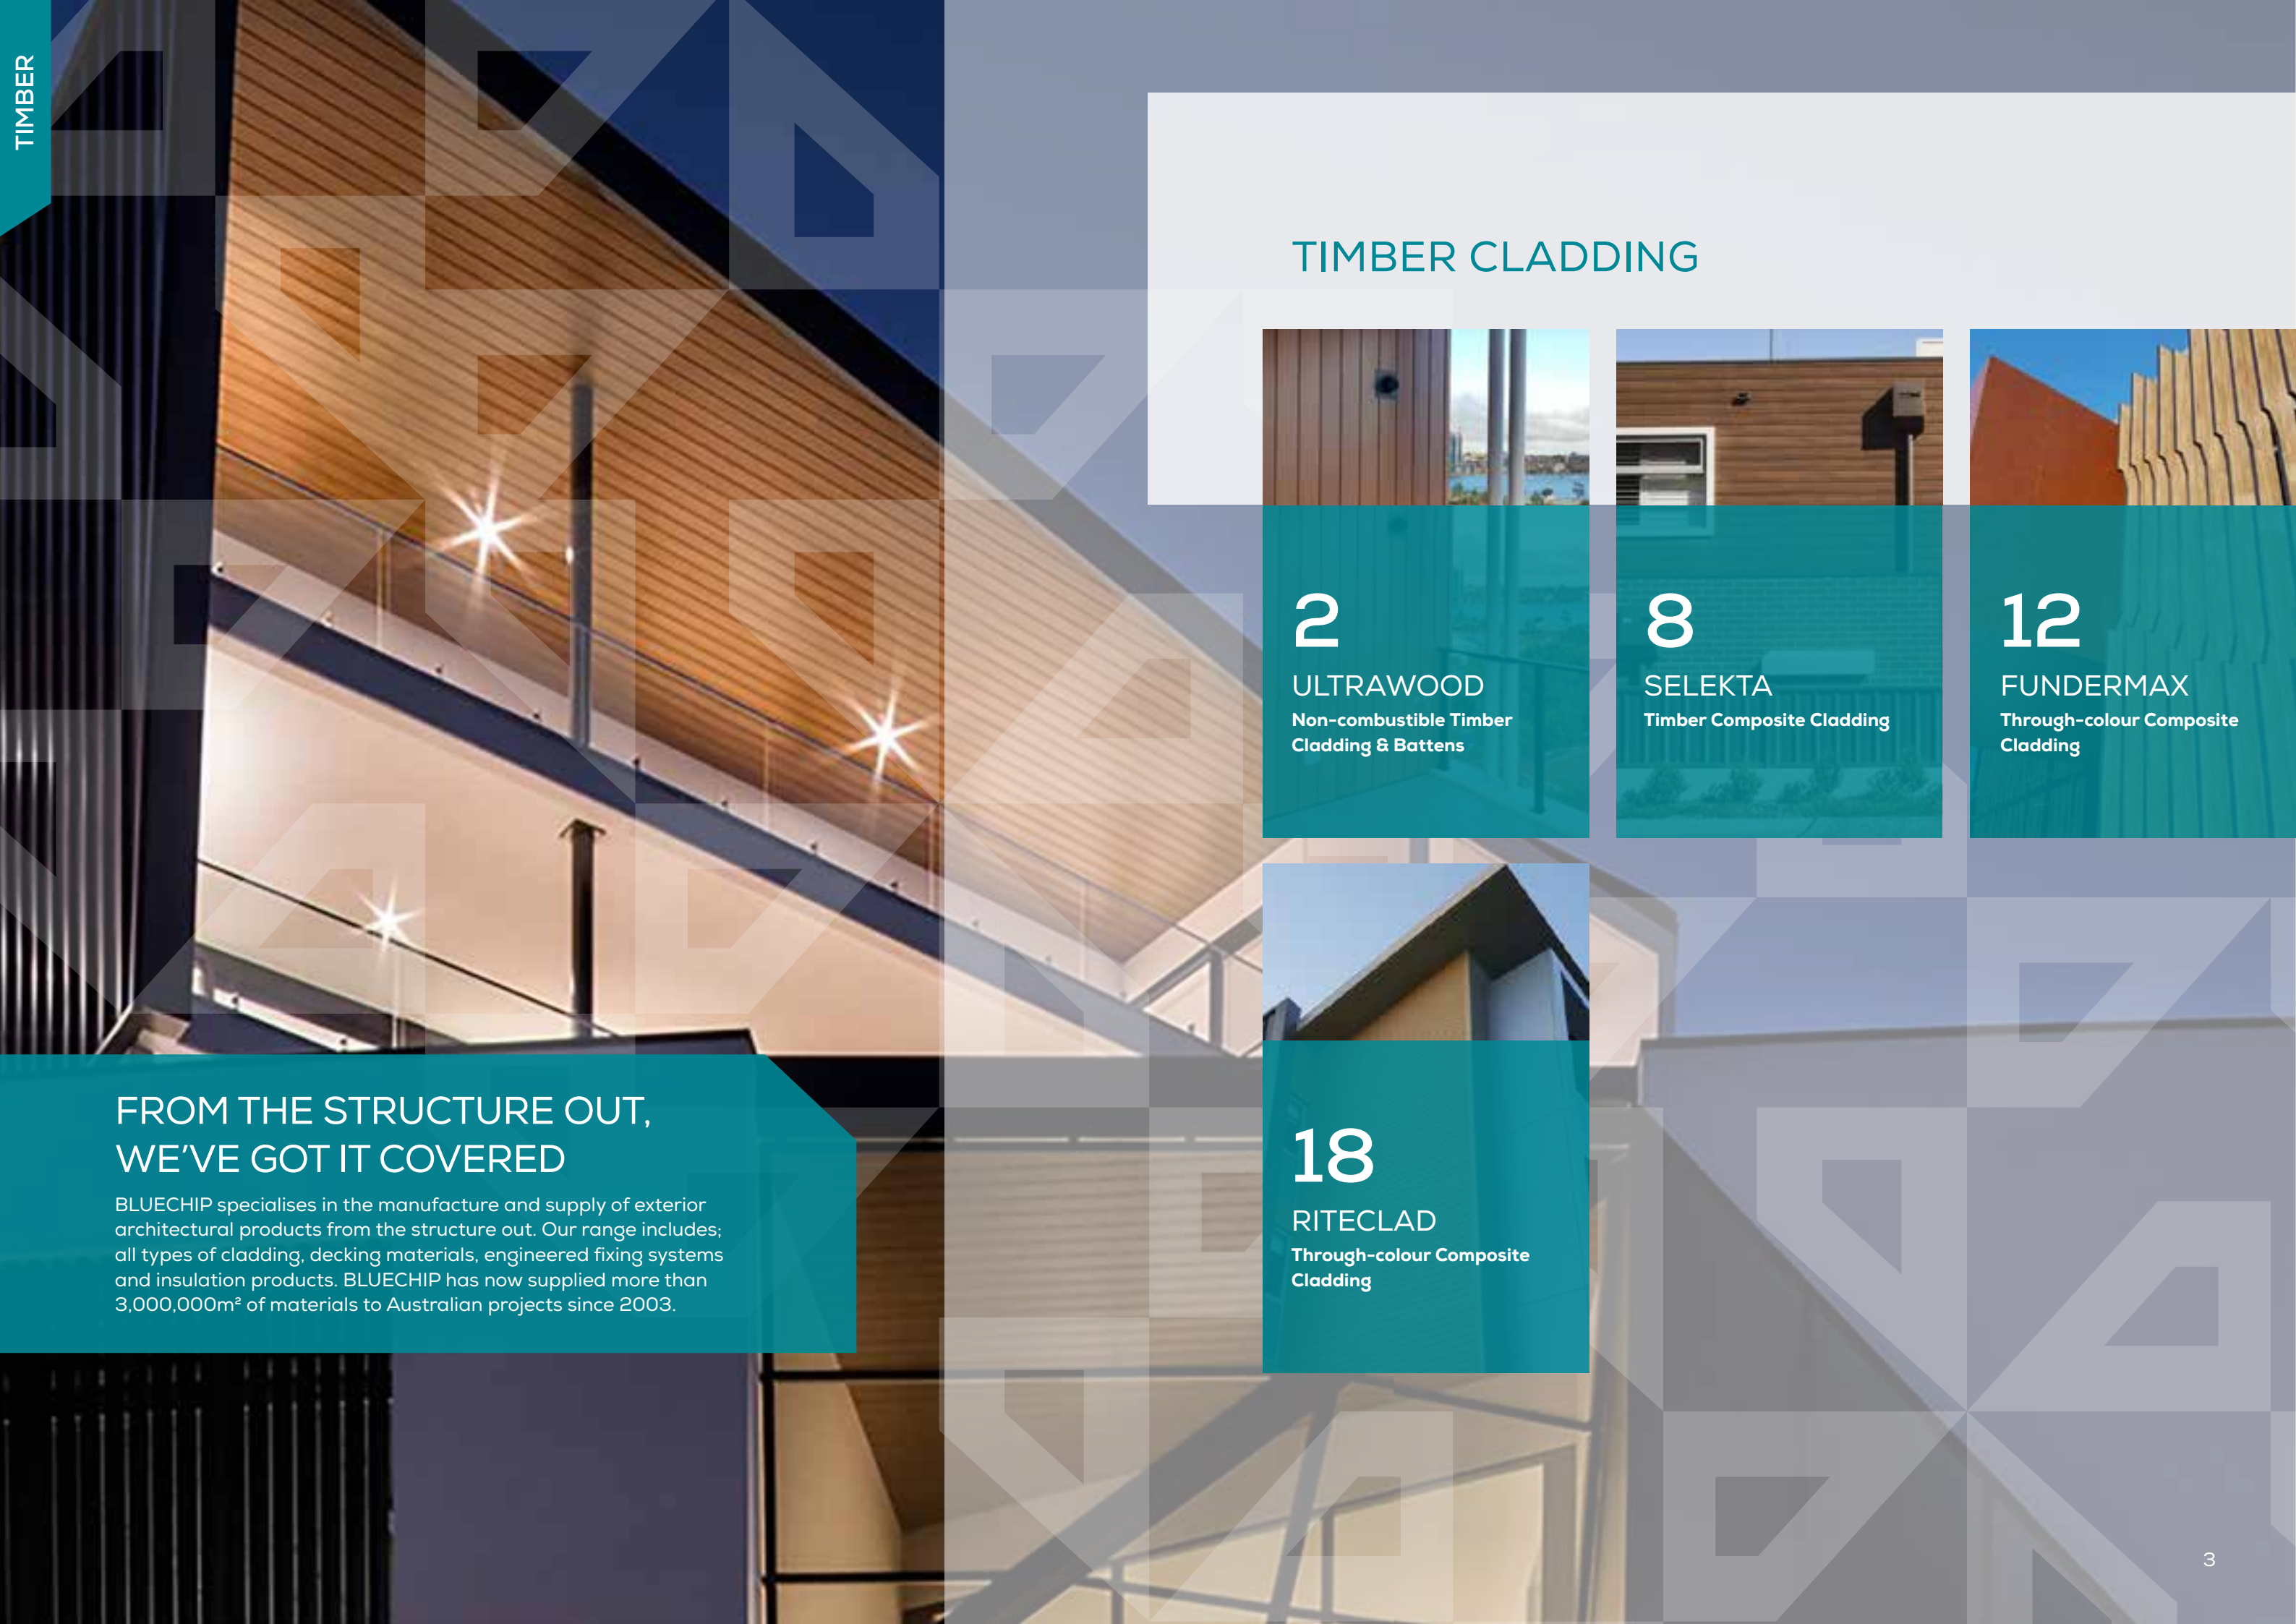

TIMBER CLADDING



2

ULTRAWOOD

Non-combustible Timber
Cladding & Battens



8

SELEKTA

Timber Composite Cladding



12

FUNDERMAX

Through-colour Composite
Cladding



18

RITECLAD

Through-colour Composite
Cladding

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.


ULTRAWOOD

Non-combustible Timber Cladding & Battens


Description

ULTRAWOOD is an innovative new generation exterior cladding product made from highly durable marine-grade aluminium and factory pre-finished using the latest matt-effect technology in a wide range of realistic timber colours. Deemed-to-satisfy non-combustible in accordance with the BCA/ NCC, it has been fully tested in Australia by CSIRO achieving excellent results to AS 1530.1 and AS 1530.3. Eco-friendly, low maintenance and incredibly durable, ULTRAWOOD is ideal for type A and B construction projects such as high rise apartments and bushfire rated areas which require non-combustible cladding.


Product Benefits




AS 1530.1 NON-COMBUSTIBLE
ULTRAWOOD is a non-combustible cladding product in accordance with the relevant requirements of the NCC/BCA and has been tested by NATA accredited CSIRO to AS 1530.1 and AS 1530.3.




MARINE GRADE DURABILITY
Along with the marine-grade aluminium base material, the matt-effect ULTRAWOOD coating has undergone extensive durability testing and has been proven to perform in the harsh Australian conditions.




INTELLIGENT PROFILE
The ULTRAWOOD profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has one single swarf-free contact point for superior consistency and weather-proofing.




EASY INSTALLATION
Supplied in custom lengths, ULTRAWOOD has 155mm cover per board making it fast and easy to install to a simple sub-frame at 600mm centres using secret-fix screws and a colour-matched trim system.




VERY LIGHT-WEIGHT
Compared to many other timber cladding products, ULTRAWOOD is a very light-weight system weighing only 8.75kg per square metre offering potential structural advantages and cost savings.



MANUFACTURER'S WARRANTY
Despite the undisputed durability of high-grade aluminium, ULTRAWOOD cladding offers a 10yr manufacturer's warranty on all different finishes for peace of mind and guaranteed performance.




NATURAL AESTHETICS
The beautiful looking finish on the ULTRAWOOD boards is possible because the latest matt-effect coating technology provides incredible richness and variation along with outstanding long-term durability.




COLOUR-MATCHED TRIMS
The ULTRAWOOD system is completed using the CLADTRIM click-together trim system covering all common construction details and finished in exactly the same matt-effect coating for a perfect match.


Profiles




Specification Code: UW*G ULTRAWOOD Groove Profile




Specification Code: UW*C ULTRAWOOD Cabin Cladding




Specification Code: UW*S ULTRAWOOD Seam Cladding




Specification Code: UW*B5050 ULTRAWOOD 50 x 50 Batten




Specification Code: UW*B10050 ULTRAWOOD 100 x 50 Batten




Specification Code: UW*B15050 ULTRAWOOD 150 x 50 Batten



Specification Code: UW*B20050 ULTRAWOOD 200 x 50 Batten



Specification Code: UW*B25050 ULTRAWOOD 250 x 50 Batten



Specification Code: UW*B30050 ULTRAWOOD 300 x 50 Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
UW*G15518	ULTRAWOOD 155 x 18mm Groove (Colour), 6.5m Length	2-3 Weeks	1 Length
UW*C20530	ULTRAWOOD 205 x 30mm Cabin (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UW*S20548	ULTRAWOOD 205 x 48mm Seam (Colour), 6.5m Length	8-10 Weeks	50 Lengths
UW*BXXX50	ULTRAWOOD XXX x 50mm Batten (Colour), 6.5m Length	2-3 Weeks	1 Length
UWEXXX50	ULTRAWOOD XXX x 50mm Batten End Cap (Colour)	2-3 Weeks	1 End Cap

(*) Indicates different finish options. U for Ultrawood Timber Colours and P for Powdercoat Colours

System Components

PAGE 92



FIRESPAN
AS 1530.1 Sarking

PAGE 106



STUDEK
Steel Sub-framing

PAGE 109



CLADTRIM
Colour-match Trims

PAGE 117



ADHESIVES
SikaTack & 11FC

PAGE 110



COLOURFIX
Coloured Fixings

INSTALL & TECHNICAL







































For installation and technical information, scan the QR code and view 'Downloads' tab.















ULTRAWOOD

Colour Chart







Ultrawood Colours

							
UW0123 Alabama White	UW1560 White Birch	UW1902 Smoke Bush	UW0903 Ivory Coast	UW0816 Hoop Pine	UW0820 Cedar	UW1318 Mallee Root	UW1570 Silver Oak
							
UW0502 European Beech	UW0523 English Willow	UW2015 Tasmanian Oak	UW0813 Honey Maple	UW0120 African Teak	UW1816 Rustic Pine	UW1315 Miry Oak	UW0402 Dusty Balso
							
UW1520 White Oak	UW0103 Alaskan Cedar	UW1703 Queensland Cedar	UW1510 Meranti	UW2503 Yukon Cedar	UW2203 Vancouver Cedar	UW0202 Bowral Bluegum	UW1410 Nannup Jarrah
							
UW1301 Manuka	UW0302 Coastal Blackwood	UW0515 English Oak	UW2311 Woodstock	UW1403 Native Cherry	UW1540 Dark Cedar	UW0220 Burmese Teak	UW1809 Red Iroko
							
UW1907 Banjo Gum	UW1813 Rich Mahogany	UW1102 Khaya Bean	UW1523 Old Walnut	UW0223 Black Wenge	UW1580 African Ebony		

Anodised Colours

							
UL0104 Asteroid	UL0320 Comet Trail	UL1225 Light Year	UL1305 Moonshine	UL1207 Lunar Glow	UL1914 Scintillation	UL0110 Astro Journey	UL0925 Infinity
							
UL1919 Solar Storm	UL0314 Constellation	UL1519 Orion Sky	UL1904 Stellar Distance				

Powdercoat Excel Colours



							
GA029A Pearl White Gloss	GD230A Domain Matt	GD031A Primrose Gloss	GD245A Classic Cream Matt	GA236A Surfmist Matt	GM235A Evening Haze Matt	GL284A Shale Grey Matt	GL252A Dune Matt
							
GD215A Harvest Matt	GD214A Paperbark Matt	GM242A Gully Matt	GM214A Jasper Matt	GG219A Headland Matt	GG262A Manor Red Matt	GM234A Terrain Matt	GL205A Woodland Matt
							
GM204A Riversand Matt	GL266A Windspray Matt	GP208A Basalt Matt	GL236A Ironstone Matt	GK203A Bushland Matt	GL210A Wallaby Matt	GJ203A Deep Ocean Matt	GL229A Monument Matt
							
GD274A Cove Matt	GK236A Pale Eucalypt Matt	GK298A Wilderness Matt	GK277A Mangrove Matt	GK274A Cottage Green Matt	GK030A Hawthorn Green Gloss	GK044A Heritage Green Gloss	GL035A Charcoal Gloss
							
GN231A Night Sky Matt							













ULTRAWOOD

Colour Chart



Powdercoat Living Colours

							
GA030A Bright White Gloss	GA124A White Satin	GA078A Pearl White Gloss	GA160A Shoji White Satin	GA057A White Birch Gloss	GA211A Off White Matt	GL258A Oyster Grey Matt	GL107A APO Grey Satin
							
GD037A Primrose Gloss	GD025A Magnolia Gloss	GD016A Almond Ivory Gloss	GD188A Doeskin Satin	GD042A Rivergum Gloss	GD007A Barley Gloss	GD247A Stone Beige Matt	GM175A Pottery Satin
							
GL060A Storm Grey Gloss	GL175A Olde Pewter Satin	GG142A Claret Satin	GL031A Transformer Grey Gloss	GL040A Notre Dame Gloss	GM100A Hamersley Brown Satin	GL015A Roseberry Grey Gloss	GN063A Coral Black Gloss
							
GN248A Custom Black Matt	GN150A Black Satin						

Powdercoat Vivica Colours

				
GW003K Mercury Silver Gloss	GL211A Citi Matt	GY070A Ultra Silver Gloss	GY119A Nobel Silver Pearl Satin	GY184C Palladium Silver Pearl Satin
				
GY270A Asteroid Pearl Matt	GL249A Storm Front Matt	GY042A Black Onyx Gloss	GY237A Charcoal Pearl Matt	GM019A Charcoal Metallic Gloss








Precis Colours

	
GY21AA Natural Shimmer Matt	GY20BA Dark Bronze Matt

















Powdercoat Anodic Colours

						
GY221A Anodic Clear Matt	GD227A Anodic Off White Matt	GL237A Anodic Silver Grey Matt	GY235A Anodic Natural Matt	GY276A Anodic Champagne Matt	GY114A Anodic Bronze Satin	GL213A Anodic Dark Grey Matt

Powdercoat Sable Colours

						
GL320A Sable Grey Nurse	GY301A Sable Silver	GL277A Sable Brilliance	GN271A Sable Asteroid	GX350A Sable Cor Ten	GN297A Sable Bass	GN341A Sable Black

Powdercoat Ultriva Colours

							
YA278A Pearl White Matt	YY245A Citi Pearl Matt	YY276A Champagne Pearl Matt	YY223A Anodic Natural Matt	YX207C French Champagne Matt	YY25AA Precis Natural Shimmer Matt	YY22BA Precis Pure Gold Matt	YY20BA Precis Dark Bronze Matt
							
YN21BA Precis Black Ink Matt	YL264A Monument Matt	YN201A Ebony Matt	YY225A Bronze Pearl Matt	YY366A Sable Medium Bronze	YW100C Eternal Silver Satin	YY377A Sable Brilliance	YY263A Titanium Pearl Matt
							
YY270A Asteroid Pearl Matt	YY397A Sable Bass	YL238A Charcoal Matt	YY237A Charcoal Pearl Matt				

Powdercoat Vitality Colours

							
GE087A Brilliant Yellow Gloss	GK063A Lycra Strip Gloss	GF049A Sensation Gloss	GG155A Lobster Satin	GK051A Viper Green Gloss	GK043A Shamrock Green Gloss	GJ045A Bondi Blue Gloss	GJ174A Jaybird Satin

SELEKTA

Timber Composite Cladding

Description

Made in Germany, SELEKTA timber composite cladding is a unique, prefinished product with a beautiful timber grain embossed surface. Designed for stability and longevity with style, SELEKTA timber composite cladding is eco-friendly, maintenance free and incredibly easy to install. SELEKTA timber composite cladding has been subjected to extreme endurance tests, including swell tests and UV tests. After being subjected to a wide range of extreme environmental conditions and temperature fluctuations between -30° and +70° Celsius, the product responded brilliantly, outlasting wind and weather for 30 years.

Product Benefits



NCC 2019 COMPLIANCE
SELEKTA timber composite cladding is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.



SECRET FIXING
SELEKTA timber composite cladding comes with a simple tongue and groove fixing system with machined screw slots for ease and speed of installation saving any need for pre-drilling each length.



BAL 29 FIRE RATING
SELEKTA timber composite cladding has been tested to AS fire standards and achieves a BAL 29 fire rating along with excellent group rating as per AS 3837 for exterior cladding.



NON LEACHING
SELEKTA timber composite cladding is the only timber based cladding that cannot leach as there are no tannins impregnated into the profile allowing for a beautiful look that will last.



AS 5113 FIRE TESTING
SELEKTA timber composite cladding has been tested as per the new AS 5113 full-scale facade fire test which is required for CV3 performance based solutions on all type A & B construction.



ACOUSTIC RATING
Laboratory acoustic testing results are available. SELEKTA timber composite cladding is the perfect material to use on multi-residential high density developments to improve acoustics.




MAINTENANCE FREE
SELEKTA timber composite cladding is guaranteed not to rot, split, warp or check. Highly resistant to damage caused by termites and fungal decay and does not need any on-going sealing, oiling or re-painting.



FULL WARRANTY
SELEKTA timber composite cladding comes with a comprehensive 10 year warranty backed by the German based manufacturer. Guaranteed quality and peace of mind for your project.

Profile




Specification Code: SK**** SELEKTA 155 x 18


Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SK1560	SELEKTA 155 x 18mm White Birch, 5.4m Length	Stock	1 Length
SK0820	SELEKTA 155 x 18mm Cedar, 5.4m Length	Stock	1 Length
SK1520	SELEKTA 155 x 18mm White Oak, 5.4m Length	Stock	1 Length
SK1570	SELEKTA 155 x 18mm Silver Oak, 5.4m Length	Stock	1 Length
SK1540	SELEKTA 155 x 18mm Dark Cedar, 5.4m Length	Stock	1 Length
SK1510	SELEKTA 155 x 18mm Meranti, 5.4m Length	Stock	1 Length
SK1580	SELEKTA 155 x 18mm African Ebony, 5.4m Length	Stock	1 Length
SKMISC	All Other Colours are Supplied to Order, 5.4m Lengths	10-12 Weeks	288 Lengths
SKS****	SELEKTA Touch-up & End-sealer (Insert Colour)	Stock	1 Can


System Components




FIRESPAN
AS 1530.1 Sarking




STUDEK
Steel Sub-framing



CLADTRIM
Colour-match Trims



ADHESIVES
SikaTack & 11FC



COLOURFIX
Coloured Fixings

*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




SELEKTA


Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.


Timber Colours




SK1560 White Birch (s)




SK1570 Silver Oak (s)




SK0820 Cedar




SK1520 White Oak (s)



SK1540 Dark Cedar (s)




SK1510 Meranti (s)




SK1580 African Ebony (s)


Solid Colours - Group 1




SK6360 Coast White




SK2150 Cream White




SK6660 Lava White




SK6510 Stone White




SK6710 Ashes White




SK6760 Earth White



SK6810 Dune White




SK6260 Arctic White




SK6370 Soft Coast




SK6270 Soft Arctic




SK6340 Deep Ocean



SK6390 Deep Coast



SK6140 Deep Reed



SK6790 Deep Earth

Solid Colours - Group 2



SK6010 Dawn White



SK6060 Moss White



SK6860 Moon White



SK6170 Soft Fog



SK6090 Deep Moss



SK6310 Polar



SK6210 Sea



SK6320 Soft Ocean



SK6330 Ocean



SK6290 Deep Arctic



SK6450 Sand



SK6580 Canyon



SK6590 Deep Canyon



SK6820 Soft Dune



SK6800 Bright Earth



SK6630 Volcanic



SK6650 Bright Volcanic



SK6400 Royal Red



SK6740 Turf



SK6730 Ashes

FUNDERMAX

High Pressure Laminate Panel

Description

FUNDERMAX Max Exterior F-Quality is a duomer high pressure laminate cladding manufactured in Austria in accordance with EN-438-6 type EDF. It is factory produced using double hardened acrylic PUR resins for excellent consistency and outstanding durability. Produced in a high pressure laminate press under very high temperature, FUNDERMAX high pressure laminate cladding is extremely tough with high resistance to fading, scratching and denting making it ideal for all interior or exterior cladding applications where a low maintenance finish and long-term durability is required.

Product Benefits



GRAFFITI RESISTANT
FUNDERMAX Max Exterior F-quality high pressure laminate cladding has a closed cell surface which prevents inks, paints and other graffiti materials from permanently harming the sheets.



FIRE RATED
FUNDERMAX Max Exterior high pressure laminate cladding has been tested to the Australian Standards by the NATA approved CSIRO achieving excellent results according to AS 3837 & AS 1530.3.



DOUBLE SIDED COLOUR
As standard all FUNDERMAX Max Exterior high pressure laminate cladding comes with the décor on both sides so that each side can be used. If one side is damaged during install simply flip to the other side.



MAINTENANCE FREE
FUNDERMAX Max Exterior high pressure laminate cladding has a very high density surface finish preventing accumulation of any dirt build up allowing for virtually no maintenance if any.



EXTREME DURABILITY
FUNDERMAX Max Exterior high pressure laminate cladding is extremely durable even in the harshest external environments. A project installed in 1978 which was tested 33 years later had little change.



FULL WARRANTY
FUNDERMAX Max Exterior high pressure laminate cladding is backed up with a 10 year warranty. However the life expectancy exceeds 33 years and has been proven to outlast many alternatives.




UV RESISTANT
FUNDERMAX Max Exterior high pressure laminate cladding is colourfast and offer exceptional resistance to UV light. According to EN ISO 4892-3 they are extremely lightfast with very minimal change.



LARGE COLOUR RANGE
FUNDERMAX Max Exterior high pressure laminate cladding is available in a huge range of decors from solid, metallic, timber, metal, concrete, and graphic print options. The limit is your imagination.

Product Range

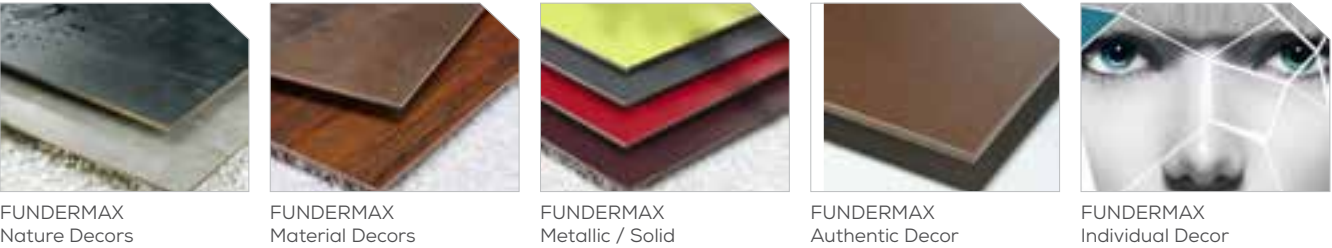

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
FUNDERMAX Nature Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Material Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Metallic & Solid Colours	2800, 4100 x 1300mm 2800, 4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Authentic Decor	4100 x 1854mm	10-12 Weeks	1 Sheet
FUNDERMAX Individual Decor	2800, 4100 x 1300mm	10-12 weeks	1 Sheet

System Components



*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.


























FUNDERMAX

Colour Chart







Nature Decors

							
FX0919 Ecuador	FX0922 Amazon	FX0601 Sun Pear	FX5171 Polar Oak	FX5172 Marshland Oak	FX5173 Barrique Oak	FX0923 Enigma	FX0924 Taurus
							
FX0935 Voyager	FX0925 Butterfly	FX0926 Jazz	FX0936 Thunder	FX0927 Creek	FX0801 Fir Platinum	FX0803 Tyrol Pine	FX0928 Gold Coast
							
FX0929 Antique	FX0930 Phoenix	FX0931 Akro Almond	FX0161 Light Afro	FX0932 Akro Terra	FX0168 Akro Rust	FX0169 Akro Ruby	FX0160 Dark Afro












Material Decors

							
FX0394 Moonwalk	FX0344 Riverside	FX0426 Loft	FX0156 Afro Patina	FX0798 Tambora	FX0793 Patina Tin	FX0794 Patina Bronze	FX0386 Blues
							
FX0387 Reggae	FX0162 Afro Sahara	FX0158 Afro Grey	FX0159 Afro Black	FX0028 Prado Brown	FX0026 Prado Alu Grey	FX0027 Prado Agate Grey	FX0496 Colosseum
							
FX0497 Stonehenge	FX0421 Venus	FX0406 Rockstar	FX0427 Skyline	FX0428 Cave	FX0429 Corro	FX0480 Kings Cross	FX0481 Satellite

Metallic Colours

					
FX0066G Sand Metallic	FX0768G Sparrow Metallic	FX5032G Cinnamon Metallic	FX0077G Charcoal Metallic	FX0080G Black Metallic	FX0056G Atlantis Metallic

Black, Grey & White

							
FX0085 White	FX0091 Starlight	FX0742 Pebble Grey	FX0741 Birch Grey	FX0074 Pastel Grey	FX0776 Concrete Grey	FX0747 Medium Grey	FX0753 Cool Grey Medium
							
FX0070 Carbon Grey	FX0075 Dark Grey	FX0077 Charcoal	FX0080 Black				

Neon

					
FX6010 Electric	FX6020 Satsuma	FX6030 Candy	FX6031 Berry	FX6040 Grape	FX6050 Pool



FUNDERMAX

Colour Chart

Yellow



FX0687 Maize



FX0647 Golden Yellow



FX0736 Saffron



FX0851 Winter White




FX0065 Ivory




FX0654 Jasmin


Blue




FX0706 Glacier Blue




FX0703 Dove Blue




FX0712 Steel Blue



FX0717 Atlantic Blue



FX0237 Gentian Blue



FX0702 Night Blue


Green




FX0725 Yellowish Green




FX0623 Green



FX0059 Dark Green



FX0592 Kiwi Green



FX0663 Reseda Green




FX0662 Jade Green




FX0591 Fir Green



FX0611 Pale Olive



FX0612 Olive



FX0056 Atlantis




FX0617 Petrol Green




FX0631 Turquoise


Red




FX0674 Mars Red




FX0689 Dark Red




FX3003 Rubinus Red



FX0691 Purple




FX0680 Wine Red




FX3007 Black Red


Brown




FX0645 Tobacco




FX0657 Sepia Brown




FX0768 Sparrow



FX0692 Old Pink



FX0661 Terracotta



FX5032 Cinnamon


Pastel




FX0733 Pale Ivory




FX0066 Sand



FX0073 Hygienic White



FX0627 Hygienic Beige



FX0651 Cream



FX0693 Orchid

Authentic



FXAU Authentic

Individual Decor



FXID Individual Decor


RITECLAD

Through-colour Composite Cladding


Description

Made in USA, RITECLAD wood composite cladding by Rightwood (Formerly Duroclad) is an extra tough, commercial grade composite cladding manufactured using a mixture of virgin and recycled plastic and recycled timber fibres. RITECLAD wood composite cladding offers a highly practical combination of quality, durability and sustainability. It is highly suitable for external use in even the harshest of environments. Contributing to RITECLAD’s outstanding physical properties, is the use of patented technology, which offers superior structural strength and sustainability and increased UV resistance.


Product Benefits




THROUGH-COLOUR MATERIAL
RITECLAD wood composite cladding is an integral board with the colour of the material going right through. Any scratches are very hard to see and can easily be fixed using a wire brush.




HIGH DURABILITY
RITECLAD wood composite cladding is formulated with a mixture of virgin and recycled plastic along with 50% recycled timber fibres. It is an extremely dense and impact resistant product.




MAINTENANCE FREE
RITECLAD wood composite cladding does not require any surface finish at the time of installation and further to this it never requires any oiling, painting or coating over the life of the product.




ROT & PEST RESISTANT
RITECLAD wood composite cladding is guaranteed not to rot, split, warp or check. It is highly resistant to damage caused by termites and fungal decay and ideal for use in termite prone areas.




SECRET FIXING
RITECLAD wood composite cladding has a tongue and groove profile allowing for fast concealed fix installation ensuring no fixings are exposed.



NCC 2019 COMPLIANCE
RITECLAD wood composite cladding is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.




ACOUSTIC RATING
Laboratory acoustic testing results are available. RITECLAD wood composite cladding is the perfect material to use on multi-residential high density developments to improve acoustics.




ENVIRONMENTALLY FRIENDLY
RITECLAD wood composite cladding is formulated with a mixture of virgin and recycled plastic along with 50% wood fibres, which promotes product longevity and environmental friendliness.

*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 52.

Profiles



Specification Code: R*C11524 RITECLAD Cladding



Specification Code: R*S5524 RITECLAD End Stop

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
RGC11524	RITECLAD 115 x 24mm Grey Cladding, 5.4m Length	1-2 Weeks	20 Lengths
RWC11524	RITECLAD 115 x 24mm Walnut Cladding, 5.4m Length	1-2 Weeks	20 Lengths
RGS5524	RITESTOP 55 x 24mm End Stop, 5.4m Length	1-2 Weeks	20 Lengths
RWS5524	RITESTOP 55 x 24mm End Stop, 5.4m Length	1-2 Weeks	20 Lengths
RR****24	Redwood Colour is Supplied to Order, 5.4m Length	12-14 Weeks	160 Lengths

System Components

PAGE 92



FIRESPAN
AS 1530.1 Sarking

PAGE 106



STUDEK
Steel Sub-framing

PAGE 109



CLADTRIM
Colour-match Trims

PAGE 117



ADHESIVES
SikaTack & 11FC

PAGE 110



COLOURFIX
Coloured Fixings

Ritescreen Colours



Grey



Walnut



Redwood

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.





We've Got It Covered

V1020



Blue Chip Group Pty Ltd
SYDNEY | MELBOURNE | PERTH
P 1300 945 123
E sales@bluechipgroup.net.au

www.bluechipgroup.net.au

DISCLAIMER No information or advice contained in this publication is binding in any way shape or form and is provided on a without prejudice basis. All photographs and colour swatches are indicative only. All dimensions are nominal and all product data and specifications are subject to change without notice. All pricing, sales, communications and transactions are subject to Blue Chip Group's terms of trading which are available on request.