



BLUECHIP

We've Got It Covered



Architectural Catalogue

www.bluechipgroup.net.au



CONTENTS



BLUECHIP

Metal Cladding

1

ULTRACORE IQ	2
ULTRABOND FR	8
ULTRASURE	12
ULTRANAMEL	16
ULTRALIGN	20
SERVICE CHARGES	98
PRODUCT RATES	99



BLUECHIP

Natural Cladding

27

EQUITONE	28
NATURION	34
SERVICE CHARGES	98
PRODUCT RATES	99



BLUECHIP

Timber Cladding

39

ULTRAWOOD	40
FUNDERMAX	46
SELEKTA	52
SERVICE CHARGES	98
PRODUCT RATES	99



BLUECHIP

Decking Products

57

TRAXION	58
CAMO	60
PRO PLUGS	61
SERVICE CHARGES	98
PRODUCT RATES	99



BLUECHIP

Insulation Products

63

IROCK	64
IROCK PLUS	66
IBOARD	68
IBOARD G1	70
INSULBLUE	72
FIRESpan	74
SERVICE CHARGES	98
PRODUCT RATES	99



BLUECHIP

Facade Systems

77

STEEL FRAMING	78
ALUMINIUM FRAMING	82
TRIMS & Z-ANGLES	84
FASTENERS	86
MEMBRANES	88
TAPES & GASKETS	90
ADHESIVES	92
SEALANTS	94
SPECIALIST TOOLS	96

FROM THE STRUCTURE OUT, WE'VE GOT IT COVERED

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

METAL CLADDING.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

METAL CLADDING

2

ULTRACORE IQ
Intelligent Non-combustible
Core Panel

8

ULTRABOND FR
Fire Resistant Aluminium
Composite Panel

12

ULTRASURE
Prefinished Solid
Aluminium Panel

16

ULTRANAMEL
Vitreous Enamel Panel

20

ULTRALIGN
Aluminium Cladding
and Battens


ULTRACORE IQ

Intelligent Non-combustible Core Panel


Description

ULTRACORE IQ intelligent core panel is Deemed-to-Satisfy non-combustible when tested to AS 1530.1 and AS 1530.3 as per the requirements of the NCC 2022, Clause C2D10(6)(g) and installed using the mechanical cassette-fix system as per NCC 2022, Clause C2D15(1). It has also been tested by Exova Warringtonfire to BS 8414 and AS 5113 full-scale testing to prove it does not contribute to the spread of fire. Visually, ULTRACORE IQ intelligent non-combustible core panel looks the same as traditional aluminium composite panel but with zero combustible core content (0%) meaning it achieves the lowest risk rating, category D, from the Insurance Council of Australia.


Product Benefits




PROVEN V-GROOVE DURABILITY
Unlike 3mm SOLID aluminium, ULTRACORE IQ has 40 years of proven durability when using the common v-groove folding system. This is because the front skin is not impacted when v-grooving, as has always been intended.




LESS THERMAL CONDUCTIVITY
ULTRACORE IQ aluminium core panel has thermal conductivity of 2.54 W/mK compared to 205 W/mK for SOLID aluminium panel. This means 80x less heat transfer into the building for greater fire safety and section J compliance.




AS 1530.1 NON-COMBUSTIBLE
ULTRACORE IQ is one of the few aluminium panels globally that is Deemed-to-Satisfy non-combustible when tested to AS 1530.1 and AS 1530.3 in accordance with the NCC 2022 Clause C2D10(6)(g) requirements.




MECHANICAL CASSETTE-FIXING
Compared to a SOLID aluminium panel, ULTRACORE IQ is faster and easier to fabricate using the well-proven z-angle cassette-fix system making it more cost effective and compliant with C2D15(1)..




AS 5113 FIRE TESTING
ULTRACORE IQ is Deemed-to-Satisfy non-combustible so does not require further testing. However it has been tested to AS 5113 full-scale testing by Exova Warringtonfire, proving it does not contribute to the spread of fire.



OIL-CANNING RESISTANCE
Oil-canning is the uneven distribution of tension in SOLID aluminium panels which results in a rippling effect on the facade. The superior mechanical properties of ULTRACORE IQ guarantees against oil-canning.



ZERO POLYETHYLENE (0%)
Unlike most other aluminium panel products including FR, Plus, A2 and NC type panels, the ULTRACORE IQ aluminium core contains ZERO percent flammable polyethylene (0%) and each lamina is 100% non-combustible.



LESS CARBON, LESS WEIGHT
ULTRACORE IQ intelligent core panel is 100% recyclable and uses 50% less aluminium per m² than 3mm SOLID aluminium for much less carbon footprint. It is also 50% lighter for significant structural and labour savings.

Product Range




Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRACORE IQ Metallic Stock Colours UC9701, UC9205, UC9134, UC9137, UC9308, UC4150, UC5292, UC9809	2500, 3200, 4000 x 1500mm	Stock	1 Sheet
ULTRACORE IQ Solid Stock Colours UC1005, UC1025, UC9902, UC1255, UC1270, UC9130, UC1590, UC1460, UC1140, UC1190, UC1677	2500, 3200, 4000 x 1500mm	Stock	1 Sheet
ULTRACORE IQ Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	300m²
ULTRACORE IQ Matt, Sparkling, Chromatic & Imitation Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	300m²


System Components

PAGE 74




FIRESPAN
AS 1530.1 Sarking

PAGE 78




BICEP & STUDTEK
Steel Facade System

PAGE 84




TRIMS & Z-ANGLES
Specialised Cladding
& Decking Fixings

PAGE 90



TAPES & GASKETS
Foil & Foam Tapes

PAGE 94



JOINT SEALANT
Prolastik & Sikaflex

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRACORE IQ

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Metallic Colours

UC9701 Sterling Silver Metallic (s)	UC9205 Champagne Metallic (s)	UC9134 Smoke Silver Metallic (s)	UC9137 Dark Grey Metallic (s)	UC9308 Bronze Metallic (s)	UC4344 Medium Bronze Metallic	UC4370 Satin Brown Metallic	UC5292 Obsidian Metallic (s)
UC4150 Gold Metallic (s)	UC9809 Copper Metallic (s)	UC2510 Terracotta Metallic	UC4190 Tangerine Metallic	UC4420 Blue Grey Metallic	UC9031 Jade Metallic		

Solid Colours

UC1005 Arctic White (s)	UC1025 Arctic Gloss (s)	UC9902 Clean White (s)	UC1255 Volcanic Grey (s)	UC1270 Hunter Grey (s)	UC9130 Carbon Black (s)	UC1590 Global Green (s)	UC1460 Royal Blue (s)
UC1140 Atomic Yellow (s)	UC1190 Pilbara Orange (s)	UC1677 Centurion Red (s)					

BCG Colours

UC9016 Traffic White	UC9010 Pure White	UC1013 Oyster White	UC1015 Light Ivory	UC1014 Ivory	UC7044 Silk Grey	UC7030 Stone Grey	UC7005 Mouse Grey
UC9002 Grey White	UC7035 Light Grey	UC7004 Signal Grey	UC7000 Squirrel Grey	UC7011 Iron Grey	UC7016 Anthracite Grey	UC7022 Umbra Grey	UC9005 Jet Black
UC6019 Pastel Green	UC6021 Pale Green	UC6018 Yellow Green	UC6037 Pure Green	UC6029 Mint Green	UC6026 Opal Green	UC6005 Moss Green	UC6003 Olive Green
UC5024 Pastel Blue	UC5023 Distant Blue	UC5015 Sky Blue	UC5021 Water Blue	UC5019 Capri Blue	UC5002 Ultramarine Blue	UC5008 Grey Blue	UC5011 Steel Blue
UC1016 Sulfur Yellow	UC1018 Zinc Yellow	UC1023 Traffic Yellow	UC1037 Sun Yellow	UC8008 Olive Brown	UC8028 Terra Brown	UC8019 Grey Brown	UC4007 Purple Violet
UC1017 Saffron Yellow	UC2003 Pastel Orange	UC2004 Pure Orange	UC2002 Vermillion	UC3020 Traffic Red	UC3001 Signal Red	UC3003 Ruby Red	UC3005 Wine Red



UNLIMITED CUSTOM COLOURS


ULTRACORE IQ has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.



ULTRACORE IQ

Colour Chart

Matt Colours




UCM884
Matt Silver




UCM885
Matt White




UCM886
Matt Pearl




UCM001
Matt Ivory




UCM006
Matt Bronze



UCM004
Matt Graphite



UCM003
Matt Copper



UCM002
Matt Gold

Sparkling Colours



UC7010
Sparkling White Gloss



UC4725
Sparkling Light Grey



UC7250
Sparkling Dark Grey



UC7295
Sparkling Black Gloss

Chromatic Colours



UC7090
Chromatic Golden Snow



UC7430
Chromatic Sunset Purple



UC7350
Chromatic Rustic Bronze



UC7290
Chromatic Galaxy Silver



UC7480
Chromatic Indigo Violet



UC7450
Chromatic Oriental Silk



UC7490
Chromatic Tropical Ocean



UC7510
Chromatic Martian Green



UC7160
Chromatic Antique Gold



UC7170
Chromatic Honey Gold




UC7180
Chromatic Tiger Orange




UC7190
Chromatic Sahara Copper


Timber Imitations




UC8310
Rustic Pine




UC8320
Unique Beli




UC8340
Vintage Walnut




UC8355
Elegant Teak



UC8385
Ascot Teak



UC8650
Noble Bloodwood



UC8395
Polished Rengas

Stone Imitations



UC6060
Marble Pearl White



UC6385
Marble Cashmir Beige



UC6315
Travertine Atlas Beige



UC6305
Travertine Calico Cream




UC6310
Granite Aurisina Beige




UC6280
Granite Magenite Black


Metal Imitations




UC2200
Brushed Silver



UC5220
Zinc Dark



UC5260
Zinc Charcoal



UC5150
Brushed Copper



UNLIMITED CUSTOM COLOURS
ULTRACORE IQ has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.


ULTRABOND FR

Fire Resistant Aluminium Composite Panel


Description

ULTRABOND FR is a 4mm thick fire resistant aluminium composite panel comprising of a >70% mineral filled core, sandwiched between two prefinished aluminium or other natural metal cover sheets such as zinc, copper or stainless steel. Utilising the reknowned PVDF paint system, ULTRABOND FR aluminium composite panel has been thoroughly tested in Australia by NATA accredited CSIRO and Exova Warringtonfire and is manufactured to the highest quality standards. It is also BCA/NCC compliant for all type C* construction projects and has full-scale fire testing in accordance with AS 5113.


Product Benefits




NCC 2022 COMPLIANCE
ULTRABOND FR aluminium composite panel is compliant with NCC 2022 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.




PVDF PAINT SYSTEM
ULTRABOND FR fire resistant aluminium composite panel only uses the highly recognised PVDF Kynar 500 or FEVE paint systems known for their high durability and optimum resistance to weather and industrial pollution.




AS 5113 FIRE TESTING
Although not required for type C construction, ULTRABOND FR fire resistant aluminium composite panel has been tested to AS 5113 by NATA approved Exova Warringtonfire to prove it does contribute to the spread of fire.




LOW MAINTENANCE
The ULTRABOND FR FR fire resistant aluminium composite panel finish has undergone 40+ years of exposure testing which is continuing to confirm the superior properties of fluoropolymer coatings.




UNLIMITED CUSTOM COLOURS
ULTRABOND FR fire resistant aluminium composite panel has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.



COST EFFECTIVE
ULTRABOND FR fire resistant aluminium composite panel has enjoyed consistent growth not only due to the desire for a clean and modern look, but also a product offering rapid cost effective installation.




LOCAL STOCK AVAILABLE
ULTRABOND FR fire resistant aluminium composite panel is stocked in a range of standard solid colours and metallic colours for fast delivery at all times.



FULL WARRANTY
ULTRABOND FR fire resistant aluminium composite panel has a long track record of consistency, reliability and quality allowing us to offer up to 15 year's warranty when installed by a licensed installer.

*For types A & B construction, use ULTRACORE IQ intelligent non-combustible core panel – see page 2.


Product Range

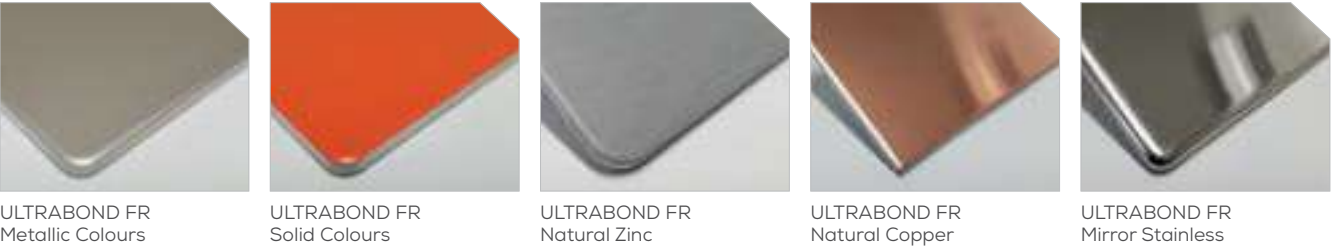

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRABOND FR Metallic Stock Colours UB9701, UB9205, UB9137	2500, 3200, 4000 x 1570mm	Stock	1 Sheet
ULTRABOND FR Solid Stock Colours UB1005, UB9130, UB1677	2500, 3200, 4000 x 1570mm	Stock	1 Sheet
ULTRABOND FR Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1570mm	10-12 Weeks	300m ²
ULTRABOND FR Natural Zinc, Copper & Stainless Steel	2500, 3200, 4000 x 1220mm	10-12 Weeks	300m ²

System Components

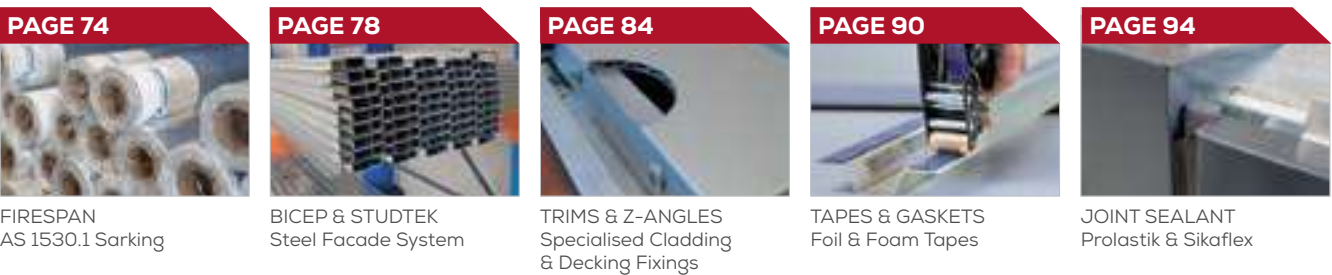

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




ULTRABOND FR


Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Metallic Colours



UB9701
Sterling Silver
Metallic (s)



UB9205
Champagne
Metallic (s)



UB9134
Smoke Silver
Metallic (s)



UB9137
Dark Grey
Metallic (s)



UB9308
Bronze Metallic
(s)




UB4150
Gold Metallic




UB9809
Copper Metallic


Solid Colours




UB1005
Arctic White (s)




UB1255
Volcanic Grey




UB9130
Carbon Black (s)




UB1460
Royal Blue



UB1140
Atomic Yellow



UB1190
Pilbara Orange



UB1677
Centurion Red (s)

BCG Colours



UB9016
Traffic White



UB9010
Pure White



UB1013
Oyster White



UB1015
Light Ivory



UB1014
Ivory



UB7044
Silk Grey



UB7030
Stone Grey



UB7005
Mouse Grey



UB9002
Grey White



UB7035
Light Grey



UB7004
Signal Grey



UB7000
Squirrel Grey



UB7011
Iron Grey



UB7016
Anthracite Grey



UB7022
Umbra Grey



UB9005
Jet Black



UB6019
Pastel Green



UB6021
Pale Green



UB6018
Yellow Green



UB6037
Pure Green



UB6029
Mint Green



UB6026
Opal Green



UB6005
Moss Green



UB6003
Olive Green



UB5024
Pastel Blue



UB5023
Distant Blue



UB5015
Sky Blue



UB5021
Water Blue



UB5019
Capri Blue



UB5002
Ultramarine
Blue




UB5008
Grey Blue



UB5011
Steel Blue


BCG Colours Cont'd




UB1016
Sulfur Yellow




UB1018
Zinc Yellow




UB1023
Traffic Yellow



UB1037
Sun Yellow




UB8008
Olive Brown



UB8028
Terra Brown




UB8019
Grey Brown




UB4007
Purple Violet



UB1017
Saffron Yellow




UB2003
Pastel Orange




UB2004
Pure Orange




UB2002
Vermilion




UB3020
Traffic Red



UB3001
Signal Red




UB3003
Ruby Red




UB3005
Wine Red


Natural Metal Finishes




UB5740
Blue Grey Zinc



UB5760
Graphite
Grey Zinc



UB5160
Natural Copper



UB5800
Stainless
Steel Mirror



UNLIMITED CUSTOM COLOURS

ULTRABOND FR has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.


ULTRASURE

Prefinished Solid Aluminium Panel


Description

ULTRASURE completes our range of BCA compliant, Deemed-to-Satisfy non-combustible aluminium cladding solutions. Offering very high impact resistance and the ability to be curved, rolled or perforated, ULTRASURE panels do not require fabrication prior to coating, greatly reducing lead-times and costs. Due to its high thermal movement and the risk of score fracturing, ULTRASURE, like all 3mm solid aluminium panels, is NOT suitable for use in the common v-groove cassette fixing method, however it can be face-fixed or break-pressed into the traditional rainscreen hook-and-rail cassette system.


Product Benefits




FACE-FIX OR BREAK-PRESS ONLY
BLUECHIP does NOT endorse installing any brand of SOLID aluminium panels with the v-grooved cassette system - it is a fundamentally flawed methodology which will lead to future structural failure and water ingress issues.




NCC 2022 COMPLIANCE
ULTRASURE solid aluminium panel is Deemed-to-Satisfy non-combustible as per NCC 2022 Clause C2D10(6)(e) making it compliant for use as external cladding on any project of types A, B & C construction.




CURVE, ROLL OR PERFORATE
The ULTRASURE 3mm aluminium panel offers excellent design versatility as it can be made into panels of almost any shape and size as well as being suitable for curved panels, rolling and perforating.




UNLIMITED CUSTOM COLOURS
ULTRASURE 3mm solid aluminium panel utilises the same PVDF coating as ULTRABOND FR and ULTRACORE IQ so it is available in the same extensive colour range and custom colours. MOQ's apply.




FINISHED BEFORE FABRICATION
Unlike traditional powder coated panels, ULTRASURE is prefinished with factory applied PVDF coating and a protective peel-off film before fabrication into cladding panels providing many practical advantages.



PVDF PAINT SYSTEM
ULTRASURE 3mm aluminium panel only uses the highly recognised PVDF KYNAR 500 or FEVE paints known for their high durability, providing the optimum resistance to weather and industrial pollution.



AS 1530.1 NON-COMBUSTIBLE
ULTRASURE is one of the few aluminium cladding panel solutions that is Deemed-to-Satisfy non-combustible when tested to AS 1530.1 and AS 1530.3 as per the requirements of NCC 2022 Clause C2D10(6)(e).



MANUFACTURER'S WARRANTY
ULTRASURE 3mm aluminium panel coating system has a long track record of consistency, reliability and quality allowing us to offer up to 15 year's warranty when installed by a licensed installer.


Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
ULTRASURE Metallic Colours	2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m²
ULTRASURE Solid Colours	2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m²
ULTRASURE Non-stock, BCG & Custom Colours	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m²
ULTRASURE Metal Imitation Finishes	2500, 3200, 4000 x 1250mm 2500, 3200, 4000 x 1500mm	10-12 Weeks	1200m²

System Components

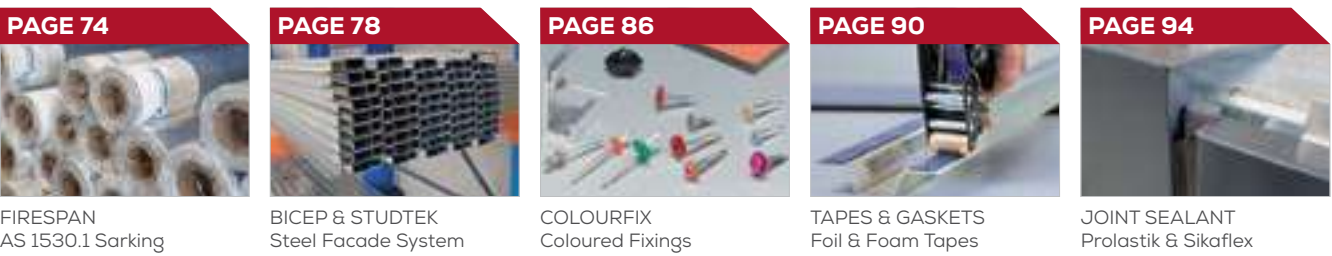

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.










ULTRASURE

Colour Chart

Metallic Colours

						
US9701 Sterling Silver Metallic	US9205 Champagne Metallic	US9134 Smoke Silver Metallic	US9137 Dark Grey Metallic	US9308 Bronze Metallic	US4150 Gold Metallic	US9809 Copper Metallic

Solid Colours

						
US1005 Arctic White	US1255 Volcanic Grey	US9130 Carbon Black	US1460 Royal Blue	US1140 Atomic Yellow	US1190 Pilbara Orange	US1677 Centurion Red

BCG Colours

							
US9016 Traffic White	US9010 Pure White	US1013 Oyster White	US1015 Light Ivory	US1014 Ivory	US7044 Silk Grey	US7030 Stone Grey	US7005 Mouse Grey
							
US9002 Grey White	US7035 Light Grey	US7004 Signal Grey	US7000 Squirrel Grey	US7011 Iron Grey	US7016 Anthracite Grey	US7022 Umbra Grey	US9005 Jet Black
							
US6019 Pastel Green	US6021 Pale Green	US6018 Yellow Green	US6037 Pure Green	US6029 Mint Green	US6026 Opal Green	US6005 Moss Green	US6003 Olive Green
							
US5024 Pastel Blue	US5023 Distant Blue	US5015 Sky Blue	US5021 Water Blue	US5019 Capri Blue	US5002 Ultramarine Blue	US5008 Grey Blue	US5011 Steel Blue

BCG Colours Cont'd

							
US1016 Sulfur Yellow	US1018 Zinc Yellow	US1023 Traffic Yellow	US1037 Sun Yellow	US8008 Olive Brown	US8028 Terra Brown	US8019 Grey Brown	US4007 Purple Violet
							
US1017 Saffron Yellow	US2003 Pastel Orange	US2004 Pure Orange	US2002 Vermilion	US3020 Traffic Red	US3001 Signal Red	US3003 Ruby Red	US3005 Wine Red

Metal Imitations

	
US2200 Brushed Silver	US5150 Brushed Copper



UNLIMITED CUSTOM COLOURS
ULTRASURE has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.




ULTRANAMEL

Vitreous Enamel Panel


Description

ULTRANAMEL vitreous enamel panel consists of a highly durable vitreous enamel coating applied to a decarbonised steel panel with an aluminium honeycomb or calcium silicate backing sheet. Vitreous enamelled architectural panels are routinely specified for commercial, institutional and infrastructure projects around the world; perfect for high impact, high traffic areas such as train stations, shopping malls and tunnels. ULTRANAMEL vitreous enamel panel has excellent anti-graffiti properties and is non-combustible providing unrivalled performance in public areas.


Product Benefits




UNLIMITED CUSTOM COLOURS
ULTRANAMEL vitreous enamel panel is available in an almost unlimited colour range. The original colour of the vitreous enamel panel is extremely durable and is expected to outlast a normal building life.




NON-COMBUSTIBLE
ULTRANAMEL is a completely non-combustible steel cladding system in accordance with NCC 2022, Clause C2D10(6)(g) withstanding temperatures of over 400°C and able to provide fire ratings of over 2 hours.




GRAFFITI PROOF
ULTRANAMEL vitreous enamel panel is extremely durable. The vitreous enamel coating has excellent scratch, graffiti and impact resistance making it ideal for areas of heavy traffic or extreme wear.




LOW MAINTENANCE
ULTRANAMEL is very low maintenance. The surface is completely impervious to contaminants, extremely smooth and extremely low static, preventing dust adhesion and resulting in only minimal cleaning required.




UV RESISTANT
ULTRANAMEL vitreous enamel panel has a far superior colour consistency over time when compared to typical cladding panels. The colour and gloss level of these panels are unaffected by sunlight.



VERSATILE DESIGN
ULTRANAMEL vitreous enamel panel can be custom designed into a wide range of shapes and dimensions. This compiled with a vast colour range make ULTRANAMEL a versatile design choice.



FAST INSTALLATION
ULTRANAMEL vitreous enamel panel is manufactured to order from provided shop drawings. The panels are formed into pre-made cassettes with fixing clips ready for fast and easy onsite installation.



HYGIENIC SURFACE
ULTRANAMEL vitreous enamel panel has a completely non-porous surface that does not absorb any bacteria. The non-stick surface allows intense cleaning with hospital grade cleaning agents.

Product Range



ULTRANAMEL
Vitreous Enamel



ULTRANAMEL
Flat Panels



ULTRANAMEL
L-shaped Panels



ULTRANAMEL
U-shaped Panels



ULTRANAMEL
Curved Panels

Availability

DESCRIPTION	PANEL SIZES	LEAD TIME	MOQ
ULTRANAMEL Flat Panels	Custom Sizes up to 2400 x 1150mm	10-12 Weeks	1 Panel
ULTRANAMEL L-shaped Panels	Custom Sizes up to 1600 x 1150m (1150mm is Width + Return)	10-12 Weeks	1 Panel
ULTRANAMEL U-shaped Panels	Custom Sizes up to 1600 x 1150m (1150mm is Width + Both Returns)	10-12 Weeks	1 Panel
ULTRANAMEL Curved Panels	Custom Sizes up to 1600 x 1150m (1150mm is Curved to Min. 300mm Radius)	10-12 Weeks	1 Panel
ULTRANAMEL L-fixing Clip	Stainless Steel with Pre-drilled Rivet Holes	10-12 Weeks	1 Clip

System Components



PAGE 74
FIRESPAN
AS 1530.1 Sarking



PAGE 88
MEMBRANES
Breathable Barriers



PAGE 78
BICEP & STUDTEK
Steel Facade System



PAGE 82
NVELOPE
Aluminium Framing



PAGE 94
SEALANTS
Prolastik & Sikaflex

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRANAMEL

Colour Chart

BCG Colours

							
UN9016 Traffic White	UN9010 Pure White	UN1013 Oyster White	UN1015 Light Ivory	UN1014 Ivory	UN7044 Silk Grey	UN7030 Stone Grey	UN7005 Mouse Grey
							
UN9002 Grey White	UN7035 Light Grey	UN7004 Signal Grey	UN7000 Squirrel Grey	UN7011 Iron Grey	UN7016 Anthracite Grey	UN7022 Umbra Grey	UN9005 Jet Black
							
UN6019 Pastel Green	UN6021 Pale Green	UN6018 Yellow Green	UN6037 Pure Green	UN6029 Mint Green	UN6026 Opal Green	UN6005 Moss Green	UN6003 Olive Green
							
UN5024 Pastel Blue	UN5023 Distant Blue	UN5015 Sky Blue	UN5021 Water Blue	UN5019 Capri Blue	UN5002 Ultramarine Blue	UN5008 Grey Blue	UN5011 Steel Blue

BCG Colours Cont'd

							
UN1016 Sulfur Yellow	UN1018 Zinc Yellow	UN1023 Traffic Yellow	UN1037 Sun Yellow	UN8008 Olive Brown	UN8028 Terra Brown	UN8019 Grey Brown	UN4007 Purple Violet
							
UN1017 Saffron Yellow	UN2003 Pastel Orange	UN2004 Pure Orange	UN2002 Vermilion	UN3020 Traffic Red	UN3001 Signal Red	UN3003 Ruby Red	UN3005 Wine Red



UNLIMITED CUSTOM COLOURS

ULTRANAMEL has unlimited colour options, we are able to match any colour from any other colour range. With small MOQ's and fast lead times you can realise your vision.


ULTRALIGN

Aluminium Cladding & Battens


Description

ULTRALIGN intelligent aluminium facade system is available in a range of solid aluminium profiles providing a reliable and attractive modern facade alternative to other commercial cladding products. ULTRALIGN products have been specifically designed by experienced commercial facade professionals to meet the demands of today's facade industry. Australian made using the finest raw materials and finish options, ULTRALIGN offers an unprecedented level of quality, reliability, and longevity with an extensive range of colours, textures, and finish options, available in both standard and custom sizes.


Product Benefits




AS 1530.1 NON-COMBUSTIBLE
ULTRALIGN products are made of 100% solid aluminium which is totally non-combustible to AS 1530.1. Architects, engineers, and tenants can be assured ULTRALIGN will not burn or contribute to fire spread.




ENVIRONMENTALLY SUSTAINABLE
ULTRALIGN cladding is a 100% recyclable product. Energy, emissions, wastage and materials are saved in every aspects of the product from manufacturing, to, delivery, installation and recycling.




INTELLIGENT INSTALLATION
The ULTRALIGN profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has double swarf-free contact points for superior consistency and weather-proofing.




MINIMAL FABRICATION
ULTRALIGN panels can be ordered to custom lengths which eliminates additional fabrication. Panels are simply interlocked and tightened, then fixed. This also optimises usability and decreases waste.




PREFINISHED SYSTEM
The entire ULTRALIGN range is pre-finished. This means there is no requirement for painting or onsite finishing. Our finish options are attractive and durable – guaranteed to stand the test of time.



INCREDIBLE AESTHETICS
ULTRALIGN profiles all have their own unique look with classic shadow lines, sharp step features or bold standing seams. Add in any anodised, powdercoat or wood grain finish and the options are limitless.












100% AUSTRALIAN MADE
ULTRALIGN is a 100% Australian owned, designed and made product, which contributes to it's outstanding quality and fast lead times. Using ULTRALIGN aids all aspects of the Australian economy



INDUSTRY LEADING WARRANTY
ULTRALIGN's 20 year product warranty is one of the longest of any facade product on the market today. Clients can be confident that their facade will remain attractive and durable for years to come.

Profiles

	Specification Code: UL*G155 ULTRALIGN Groove Profile
	Specification Code: UL*C155 ULTRALIGN Cabin Profile
	Specification Code: UL*S205 ULTRALIGN Seam Profile
	Specification Code: UL*B5050 ULTRALIGN 50 x 50 Batten
	Specification Code: UL*B10050 ULTRALIGN 100 x 50 Batten
	Specification Code: UL*B15050 ULTRALIGN 150 x 50 Batten
	Specification Code: UL*B20050 ULTRALIGN 200 x 50 Batten
	Specification Code: UL*B25050 ULTRALIGN 250 x 50 Batten
	Specification Code: UL*B30050 ULTRALIGN 300 x 50 Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
UL*G15518	ULTRALIGN 155 x 18mm Groove (Insert Colour), 6.5m Length	4-5 Weeks	1 Length
UL*C15525	ULTRALIGN 155 x 25mm Cabin (Insert Colour), 6.5m Length	14-16 Weeks	50 Lengths
UL*S20548	ULTRALIGN 205 x 48mm Seam (Insert Colour), 6.5m Length	14-16 Weeks	50 Lengths
UL*BXXX50	ULTRALIGN XXX x 50mm Batten (Insert Colour), 6.5m Length	4-5 Weeks	1 Length
UL*EXXX50	ULTRALIGN XXX x 50mm Batten End Cap (Insert Colour)	4-5 Weeks	1 End Cap
CFM40X	COLOURFIX 40mm x 8g End Cap Screw (Insert Colour), 100 Pack	3-4 Weeks	1 Pack

(*) The asterisk in the code denotes the specified type of finish to be applied to the aluminium extrusion as follows; U = Ultrawood Timber Colours, A = Anodised Colours and P = Powdercoat Colours.

System Components

PAGE 74



FIRESPAN
AS 1530.1 Sarking

PAGE 88



MEMBRANES
Breathable Barriers

PAGE 78



BICEP & STUDTEK
Steel Facade System

PAGE 84



CLADTRIM
Colour-match Trims

PAGE 86



FASTENERS
Cladding Fixings

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



ULTRALIGN

Colour Chart

Anodised Colours

UL0320 Comet Trail*	UL1225 Light Year*	UL1305 Moonshine	UL1207 Lunar Glow	UL1914 Scintillation	UL0110 Astro Journey	UL0925 Infinity	UL1919 Solar Storm
UL0314 Constellation	UL1519 Orion Sky	UL1904 Stellar Distance					

Material Colours

UL0102 Authentic Brushed	UL0116 Authentic Polished	UL0114 Authentic Natural	UL0318 Coral Rust	UL0118 Authentic Rust	UL2118 Uluru Rust	UL0418 Dark Rust	UL2102 Uluru Brushed
UL2116 Uluru Polished	UL2114 Uluru Natural	UL0202 Bronze Brushed	UL1502 Ochre Brushed	UL1514 Ochre Natural			

Powdercoat Excel Colours

GA029A Pearl White Gloss	GD230A Domain Matt	GD031A Primrose Gloss	GD245A Classic Cream Matt	GA236A Surfmist Matt	GM235A Evening Haze Matt	GL284A Shale Grey Matt	GL252A Dune Matt
GD215A Harvest Matt	GD214A Paperbark Matt	GM242A Gully Matt	GM214A Jasper Matt	GG219A Headland Matt	GG262A Manor Red Matt	GM234A Terrain Matt	GL205A Woodland Matt
GM204A Riversand Matt	GL266A Windspray Matt	GP208A Basalt Matt	GL236A Ironstone Matt	GK203A Bushland Matt	GL210A Wallaby Matt	GJ203A Deep Ocean Matt	GL229A Monument Matt
GD274A Cove Matt	GK236A Pale Eucalypt Matt	GK298A Wilderness Matt	GK277A Mangrove Matt	GK274A Cottage Green Matt	GK030A Hawthorn Green Gloss	GK044A Heritage Green Gloss	GL035A Charcoal Gloss
GN231A Night Sky Matt							

(*) These colours will not be consistent and will have significant variation of colour and tone both between different lengths and within a single length.



ULTRALIGN

Colour Chart



Powdercoat Living Colours

							
GA030A Bright White Gloss	GA124A White Satin	GA078A Pearl White Gloss	GA160A Shoji White Satin	GA057A White Birch Gloss	GA211A Off White Matt	GL258A Oyster Grey Matt	GL107A APO Grey Satin
							
GD037A Primrose Gloss	GD025A Magnolia Gloss	GD016A Almond Ivory Gloss	GD188A Doeskin Satin	GD042A Rivergum Gloss	GD007A Barley Gloss	GD247A Stone Beige Matt	GM175A Pottery Satin
							
GL060A Storm Grey Gloss	GL175A Olde Pewter Satin	GG142A Claret Satin	GL031A Transformer Grey Gloss	GL040A Notre Dame Gloss	GM100A Hamersley Brown Satin	GL015A Roseberry Grey Gloss	GN063A Coral Black Gloss
							
GN248A Custom Black Matt	GN150A Black Satin						








Powdercoat Vivica Colours

				
GW003K Mercury Silver Gloss	GL211A Citi Matt	GY070A Ultra Silver Gloss	GY119A Nobel Silver Pearl Satin	GY184C Palladium Silver Pearl Satin
				
GY270A Asteroid Pearl Matt	GL249A Storm Front Matt	GY042A Black Onyx Gloss	GY237A Charcoal Pearl Matt	GM019A Charcoal Metallic Gloss








Precis Colours

	
GY21AA Natural Shimmer Matt	GY20BA Dark Bronze Matt

Powdercoat Anodic Colours

						
GY221A Anodic Clear Matt	GD227A Anodic Off White Matt	GL237A Anodic Silver Grey Matt	GY235A Anodic Natural Matt	GY276A Anodic Champagne Matt	GY114A Anodic Bronze Satin	GL213A Anodic Dark Grey Matt









Powdercoat Sable Colours


						
GL320A Sable Grey Nurse	GY301A Sable Silver	GL277A Sable Brilliance	GN271A Sable Asteroid	GX350A Sable Cor Ten	GN297A Sable Bass	GN341A Sable Black

Powdercoat Ultriva Colours

							
YA278A Pearl White Matt	YY245A Citi Pearl Matt	YY276A Champagne Pearl Matt	YY223A Anodic Natural Matt	YX207C French Champagne Matt	YY25AA Precis Natural Shimmer Matt	YY22BA Precis Pure Gold Matt	YY20BA Precis Dark Bronze Matt
							
YN21BA Precis Black Ink Matt	YL264A Monument Matt	YN201A Ebony Matt	YY225A Bronze Pearl Matt	YY366A Sable Medium Bronze	YW100C Eternal Silver Satin	YY377A Sable Brilliance	YY263A Titanium Pearl Matt
							
YY270A Asteroid Pearl Matt	YY397A Sable Bass	YL238A Charcoal Matt	YY237A Charcoal Pearl Matt				

Powdercoat Vitality Colours

							
GE087A Brilliant Yellow Gloss	GK063A Lycra Strip Gloss	GF049A Sensation Gloss	GG155A Lobster Satin	GK051A Viper Green Gloss	GK043A Shamrock Green Gloss	GJ045A Bondi Blue Gloss	GJ174A Jaybird Satin

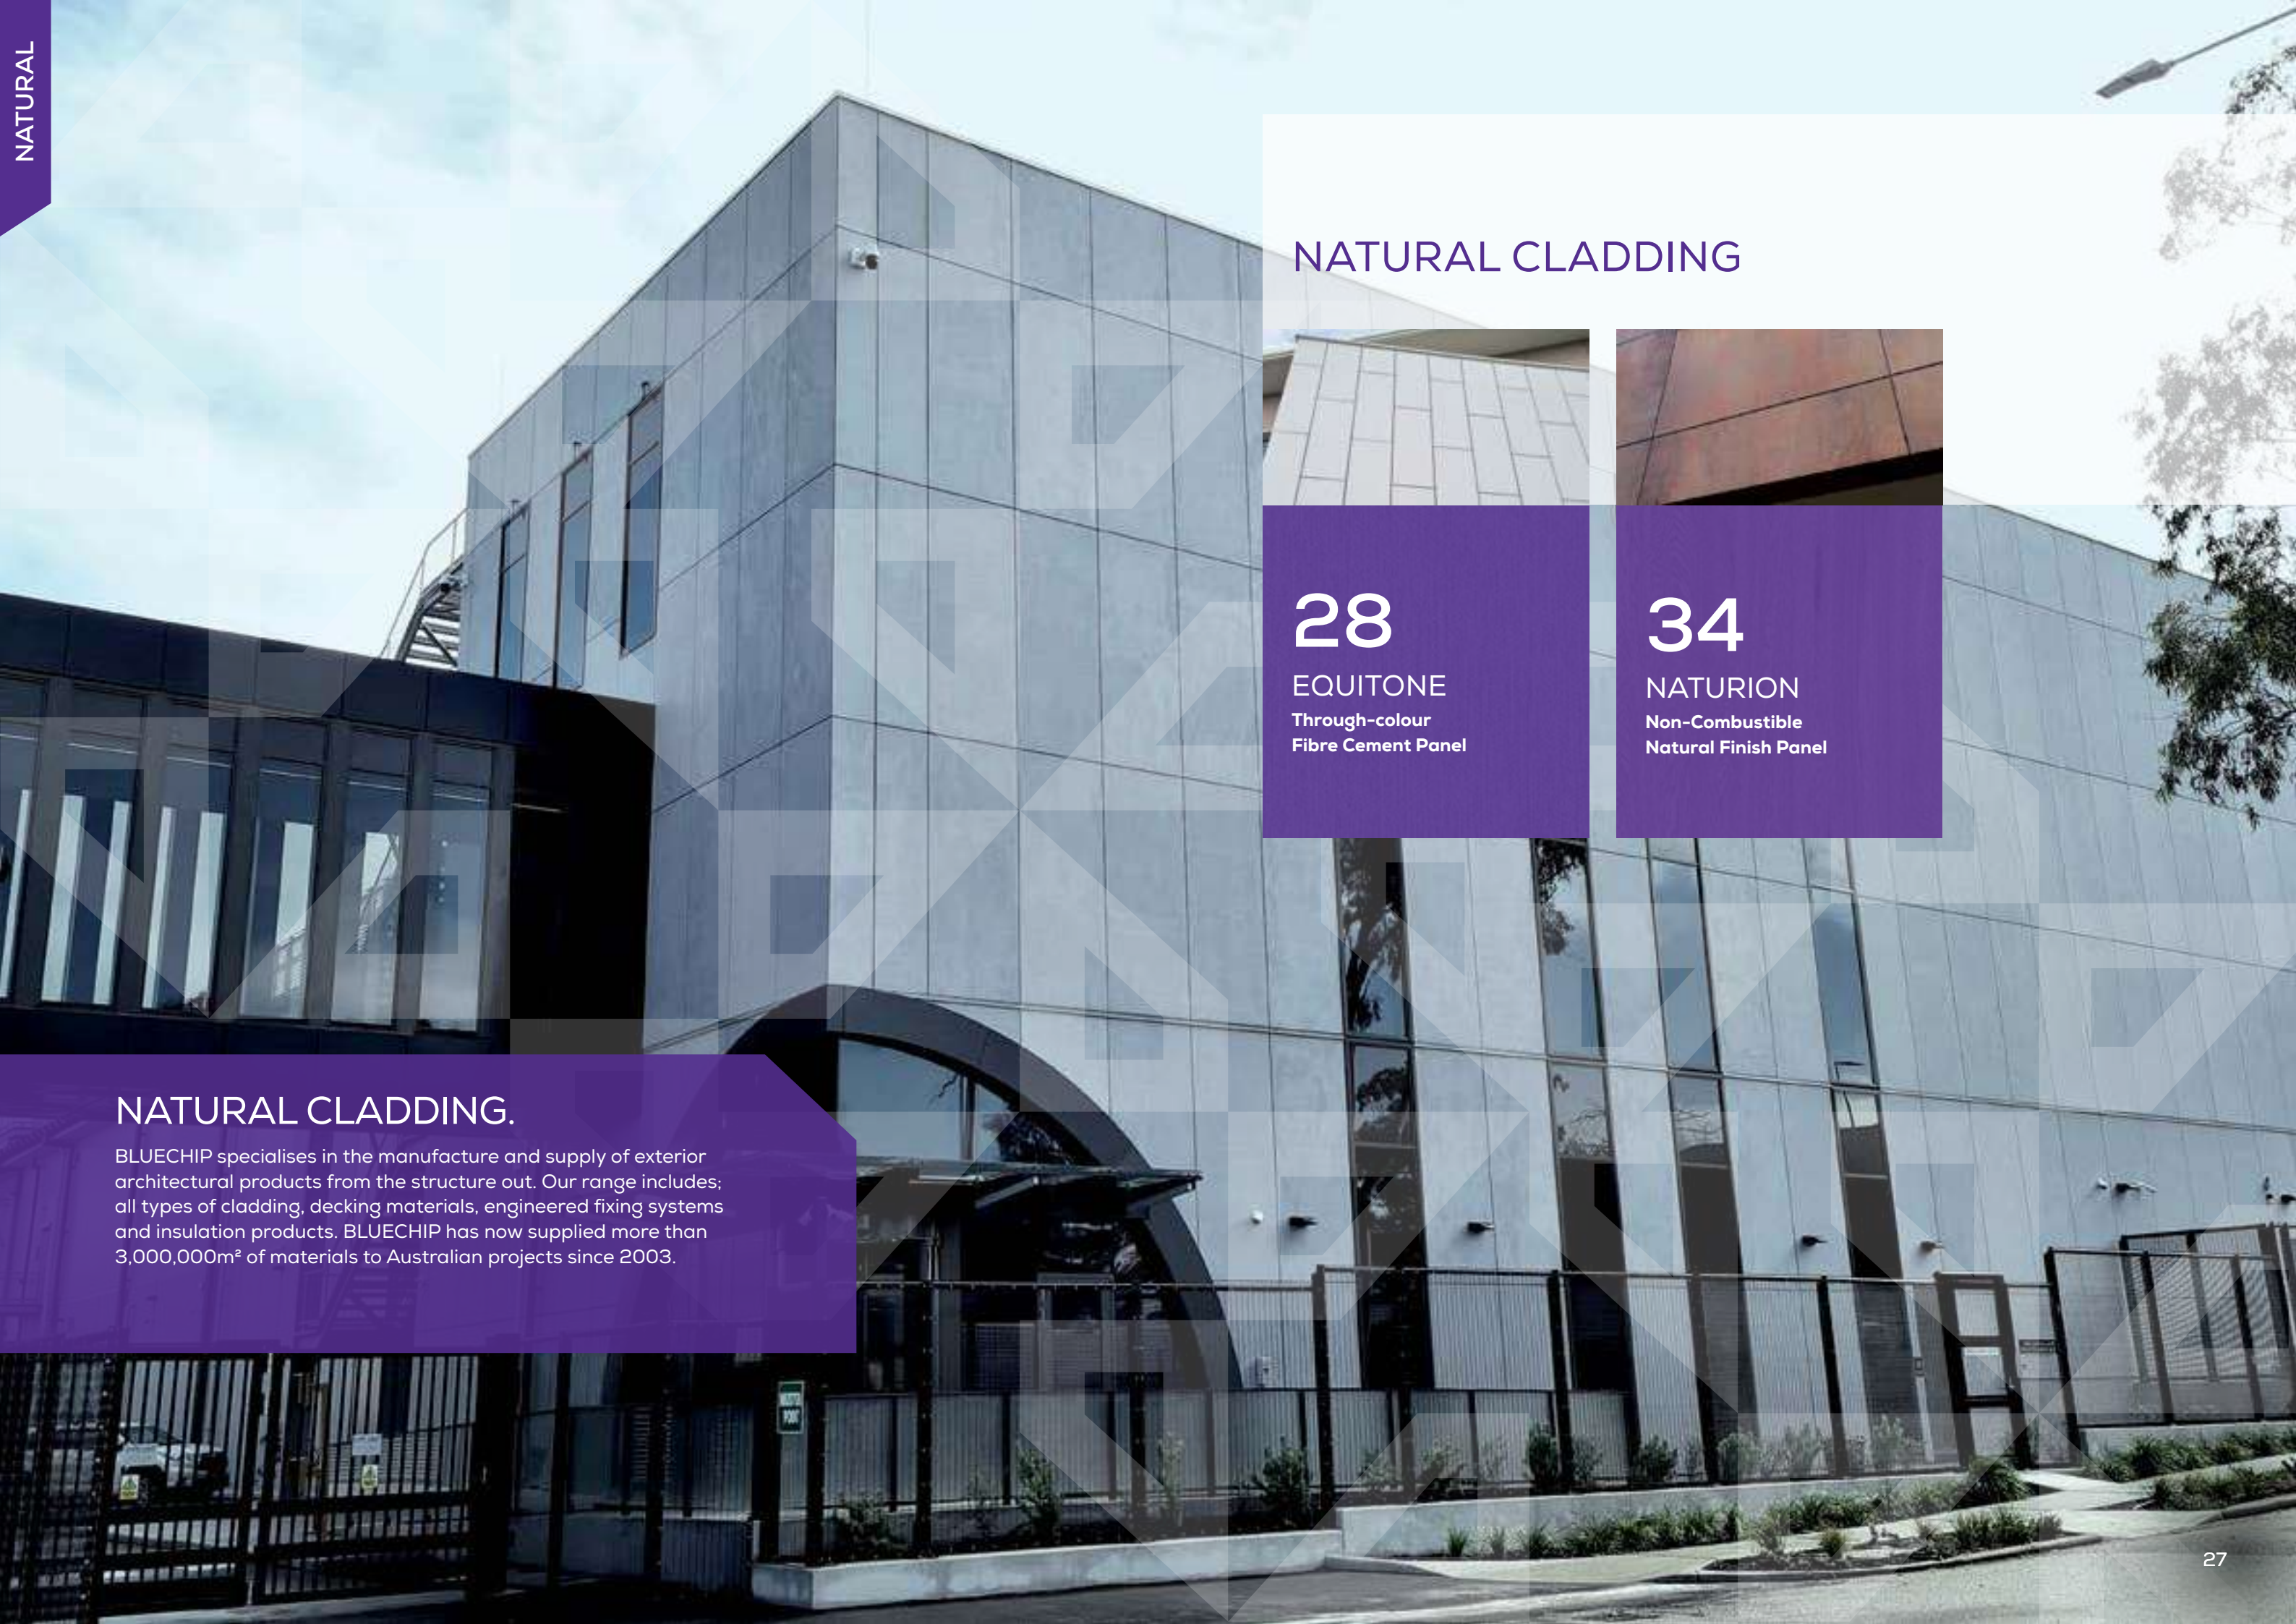

NATURAL CLADDING

28

EQUITONE

Through-colour
Fibre Cement Panel

34

NATURION

Non-Combustible
Natural Finish Panel

NATURAL CLADDING.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.




EQUITONE

Through-Colour Fibre Cement Panel


Description

EQUITONE is a through-coloured fibre cement cladding designed by and for architects. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material. Fibre cement is a cement composite material that consists of cement, cellulose and mineral materials, reinforced by a visible matrix. Nothing else. Visible and invisible fixing methods include riveting, screwing and bonding on metal or wood supporting frames. No matter what design options you explore, the through-coloured nature of EQUITONE assures crisp, monolithic details in a wide range of unique finishes.


Product Benefits




THROUGH-COLOUR MATERIAL
EQUITONE through-colour fibre cement cladding offers elegant shades of natural colour. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material.




NON-COMBUSTIBLE
EQUITONE through-colour fibre cement cladding is a non-combustible facade material that can be used internally or externally wherever a non-combustible material is required.




EASY TO CUT & INSTALL
EQUITONE through-colour fibre cement cladding is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.




LOCAL STOCK AVAILABLE
EQUITONE through-colour fibre cement cladding is readily available with over 10 colours in stock Australia wide. Please contact us to confirm the stock range and current available sheet sizes.




REPELS WATER
EQUITONE cladding receives a hydrophobation process which prevents moisture ingress into the core of the panel. This allows the completely raw panel to be exposed to the elements without any treatment.



MAINTENANCE FREE
EQUITONE through-colour fibre cement cladding is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.



HIGH DURABILITY
EQUITONE through-colour fibre cement cladding is an exceptionally durable panel. Even in the most demanding applications EQUITONE has a life expectancy exceeding 50 years.



VENTILATED SYSTEM
EQUITONE cladding is installed on a ventilated sub-construction system allowing for the building envelope to breathe which increases thermal and energy efficiency and promotes healthier buildings.

Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
EQUITONE Tectiva TE90, TE10, TE20	2500, 3050 x 1220mm	Stock	1 Sheet
EQUITONE Tectiva TE00, TE15, TE60	2500, 3050 x 1220mm	2-3 Weeks	1 Sheet
EQUITONE Tectiva TE30, TE40	2500, 3050 x 1220mm	14-16 Weeks	40 Sheets
EQUITONE Natura N154, N161, N991, N593, N412, N252, N250, N251, N074	2500, 3100 x 1250mm	2-3 Weeks	1 Sheet
EQUITONE Natura All Other Colours	2500, 3100 x 1250mm	14-16 Weeks	30 Sheets
EQUITONE Lines	2500, 3050 x 1220mm	2-3 Weeks	1 Sheet
EQUITONE Lunara	2500, 3050 x 1220mm	14-16 Weeks	30 Sheets
EQUITONE Pictura	2500, 3100 x 1250mm	14-16 Weeks	30 Sheets

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
EQR***	EQUITONE Uni Rivet (Insert Colour), 250 Pack	Stock	1 Pack
EQUFPS	EQUITONE Uni Rivet Fixed Point Sleeve, 100 Pack	Stock	1 Pack
EQU***	EQUITONE Uni Timber Screw (Insert Colour), 250 Pack	3-4 Weeks	1 Pack
EUSS	EQUITONE Uni Screw Sleeve, 250 Pack	3-4 Weeks	1 Pack
EQLUK10	LUKO 1 Litre Edge Sealer (Natura Only)	Stock	1 Can

System Components



INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



EQUITONE

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Equitone Tectiva



TE90
White (s)



TE00
Calico (s)



TE10
Natural (s)



TE60
Hessian (s)



TE15
Concrete (s)



TE20
Raw Grey (s)



TE30
Sandstorm




TE40
Sahara




TE85
Graphite


Equitone Natura




N164
White




N162
Chalk Grey




N154
Cream White



N861
Tawny Hue




N961
Ecru



N161
Pale Mist



N163
Soft Grey




N211
Classic Grey




N252
Ash Grey



N891
Beach Stone



N892
Fossil Grey



N250
Natural Grey




N294
Portland




N281
Nimbus



N251
Anthracite




N073
Charcoal




N074
Obsidian


Equitone Natura (Special Colours)




N661
Muted Yellow




N662
Summer Haze




N593
Green Mist




N594
Jadeite Green




N411
Sea Mist




N412
Blue Grey




N991
Autumn Dusk



N972
Sepia




N331
Agate Red




N359
Ruby


Equitone Lines



LT20
Raw Grey




LT60
Hessian




LT90
White

Equitone Lunara



LA60
Hessian



LA20
Raw Grey

EQUITONE

Colour Chart

Equitone Pictura

							
PW141 Porcelain	PW841 Parchment	PG843 Fawn Grey	PG243 Moonstone	PG241 Gunmetal Grey	PG844 Mocha	PA944 Espresso	PA041 Matt Black
							
PG542 Olive	PG642 Antique Yellow	PG641 Powder Yellow	PG742 Pale Orange	PG341 Volcanic Red	PG342 Deep Purple	PG444 Navy Blue	PG443 Regency Blue
							
PG442 Sky Blue	PG544 Bright Green	PG545 Autumn Green	PG546 Teal				




Non-combustible Natural Finish Panel


Description

NATURION non-combustible natural-finish panel is a revolutionary and innovative new facade material developed with architects and designers in mind. Due to Australia's strict fire compliance standards, it has become increasingly difficult to use natural timber cladding panels whilst meeting non-combustibility requirements. NATURION solves this problem by providing the rich natural warmth of timber, stone and rusted metal panels while at the same time being; light-weight, highly durable, prefinished and most importantly Deemed-to-Satisfy non-combustible in accordance with NCC 2022, Clause C2D10(6)(d).


Product Benefits




NON-COMBUSTIBLE
Unlike almost all other timber looking panels such as plywood and high pressure laminate, NATURION natural-finish panels are Deemed-to-Satisfy non-combustible in accordance with NCC 2022, Clause C2D10(6)(d).




AUTHENTIC AESTHETICS
Available in an inspiring range of natural timber, stone and rusted metal finishes, NATURION offers beautiful natural aesthetics without compromising on durability, low maintenance or fire compliance.




EASY TO CUT & INSTALL
NATURION non-combustible natural-finish panel is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.




HIGH DURABILITY
NATURION non-combustible natural-finish panel is a highly durable material offering exceptional impact, abrasion and graffiti resistance and making it ideal for both public and private sector projects.




ENVIRONMENTALLY FRIENDLY
Manufactured in Europe to strict environmental standards, NATURION has an A1+ classification for volatile substance emissions and is made of organic natural materials for long-term sustainability.



15 YEAR WARRANTY
With a factory applied impervious matt-finish, NATURION provides outstanding resistance to UV radiation, extreme temperatures, fungi, mould, staining etc and it is backed up with a 15yr warranty.



MAINTENANCE FREE
NATURION non-combustible natural-finish panel is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.



PROPRIETARY SYSTEM
NATURION non-combustible natural-finish panel is installed on a proprietary ventilated sub-frame facade system using either visible colour-matched fasteners or a concealed secret-fix system.

Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
NATURION 8mm Timber Decors	2500, 3200 x 1200mm	14-16 Weeks	100m²
NATURION 8mm Material Decor Boards	2500, 3200 x 1200mm	14-16 Weeks	100m²
NATURION 8mm Stone Decor Boards	2500, 3200 x 1200mm	14-16 Weeks	100m²

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
NTLUK10	NATURION 1 Litre Edge Sealer (Apply to all cut edges)	Stock	1 Can

System Components



INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.











NATURION






Colour Chart

Timber Decors

							
NTT127 Weathered Oak	NTT507 Bleached Oak	NTT461 Fijian Teak	NTT102 Burmese Teak	NTT191 Sherwood Oak	NTT125 Vintage Oak	NTT126 Smoked Oak	NTT124 Burnt Oak

Material Decors


							
NTM211 Uluru Oxide	NTM161 Pilbara Oxide	NTM454 Streaky Oxide	NTM020 Fortescue Oxide	NTM426B Raw Tilt Panel	NTM020B Smoky Oxide	NTM031 Moonlight Stucco	NTM 020B Smoky Oxide

				
NTM029 Smoky Stucco	NTM020A Thunder Oxide	NTM028 Thunder Stucco	NTM318 Graphite Stucco	NTM318A Carbon Stucco

Stone Decors

			
NTS007 Cool Travertine	NTS006 Warm Travertine	NTS004 Roman Travertine	NTS019 Kalbarri Sandstone



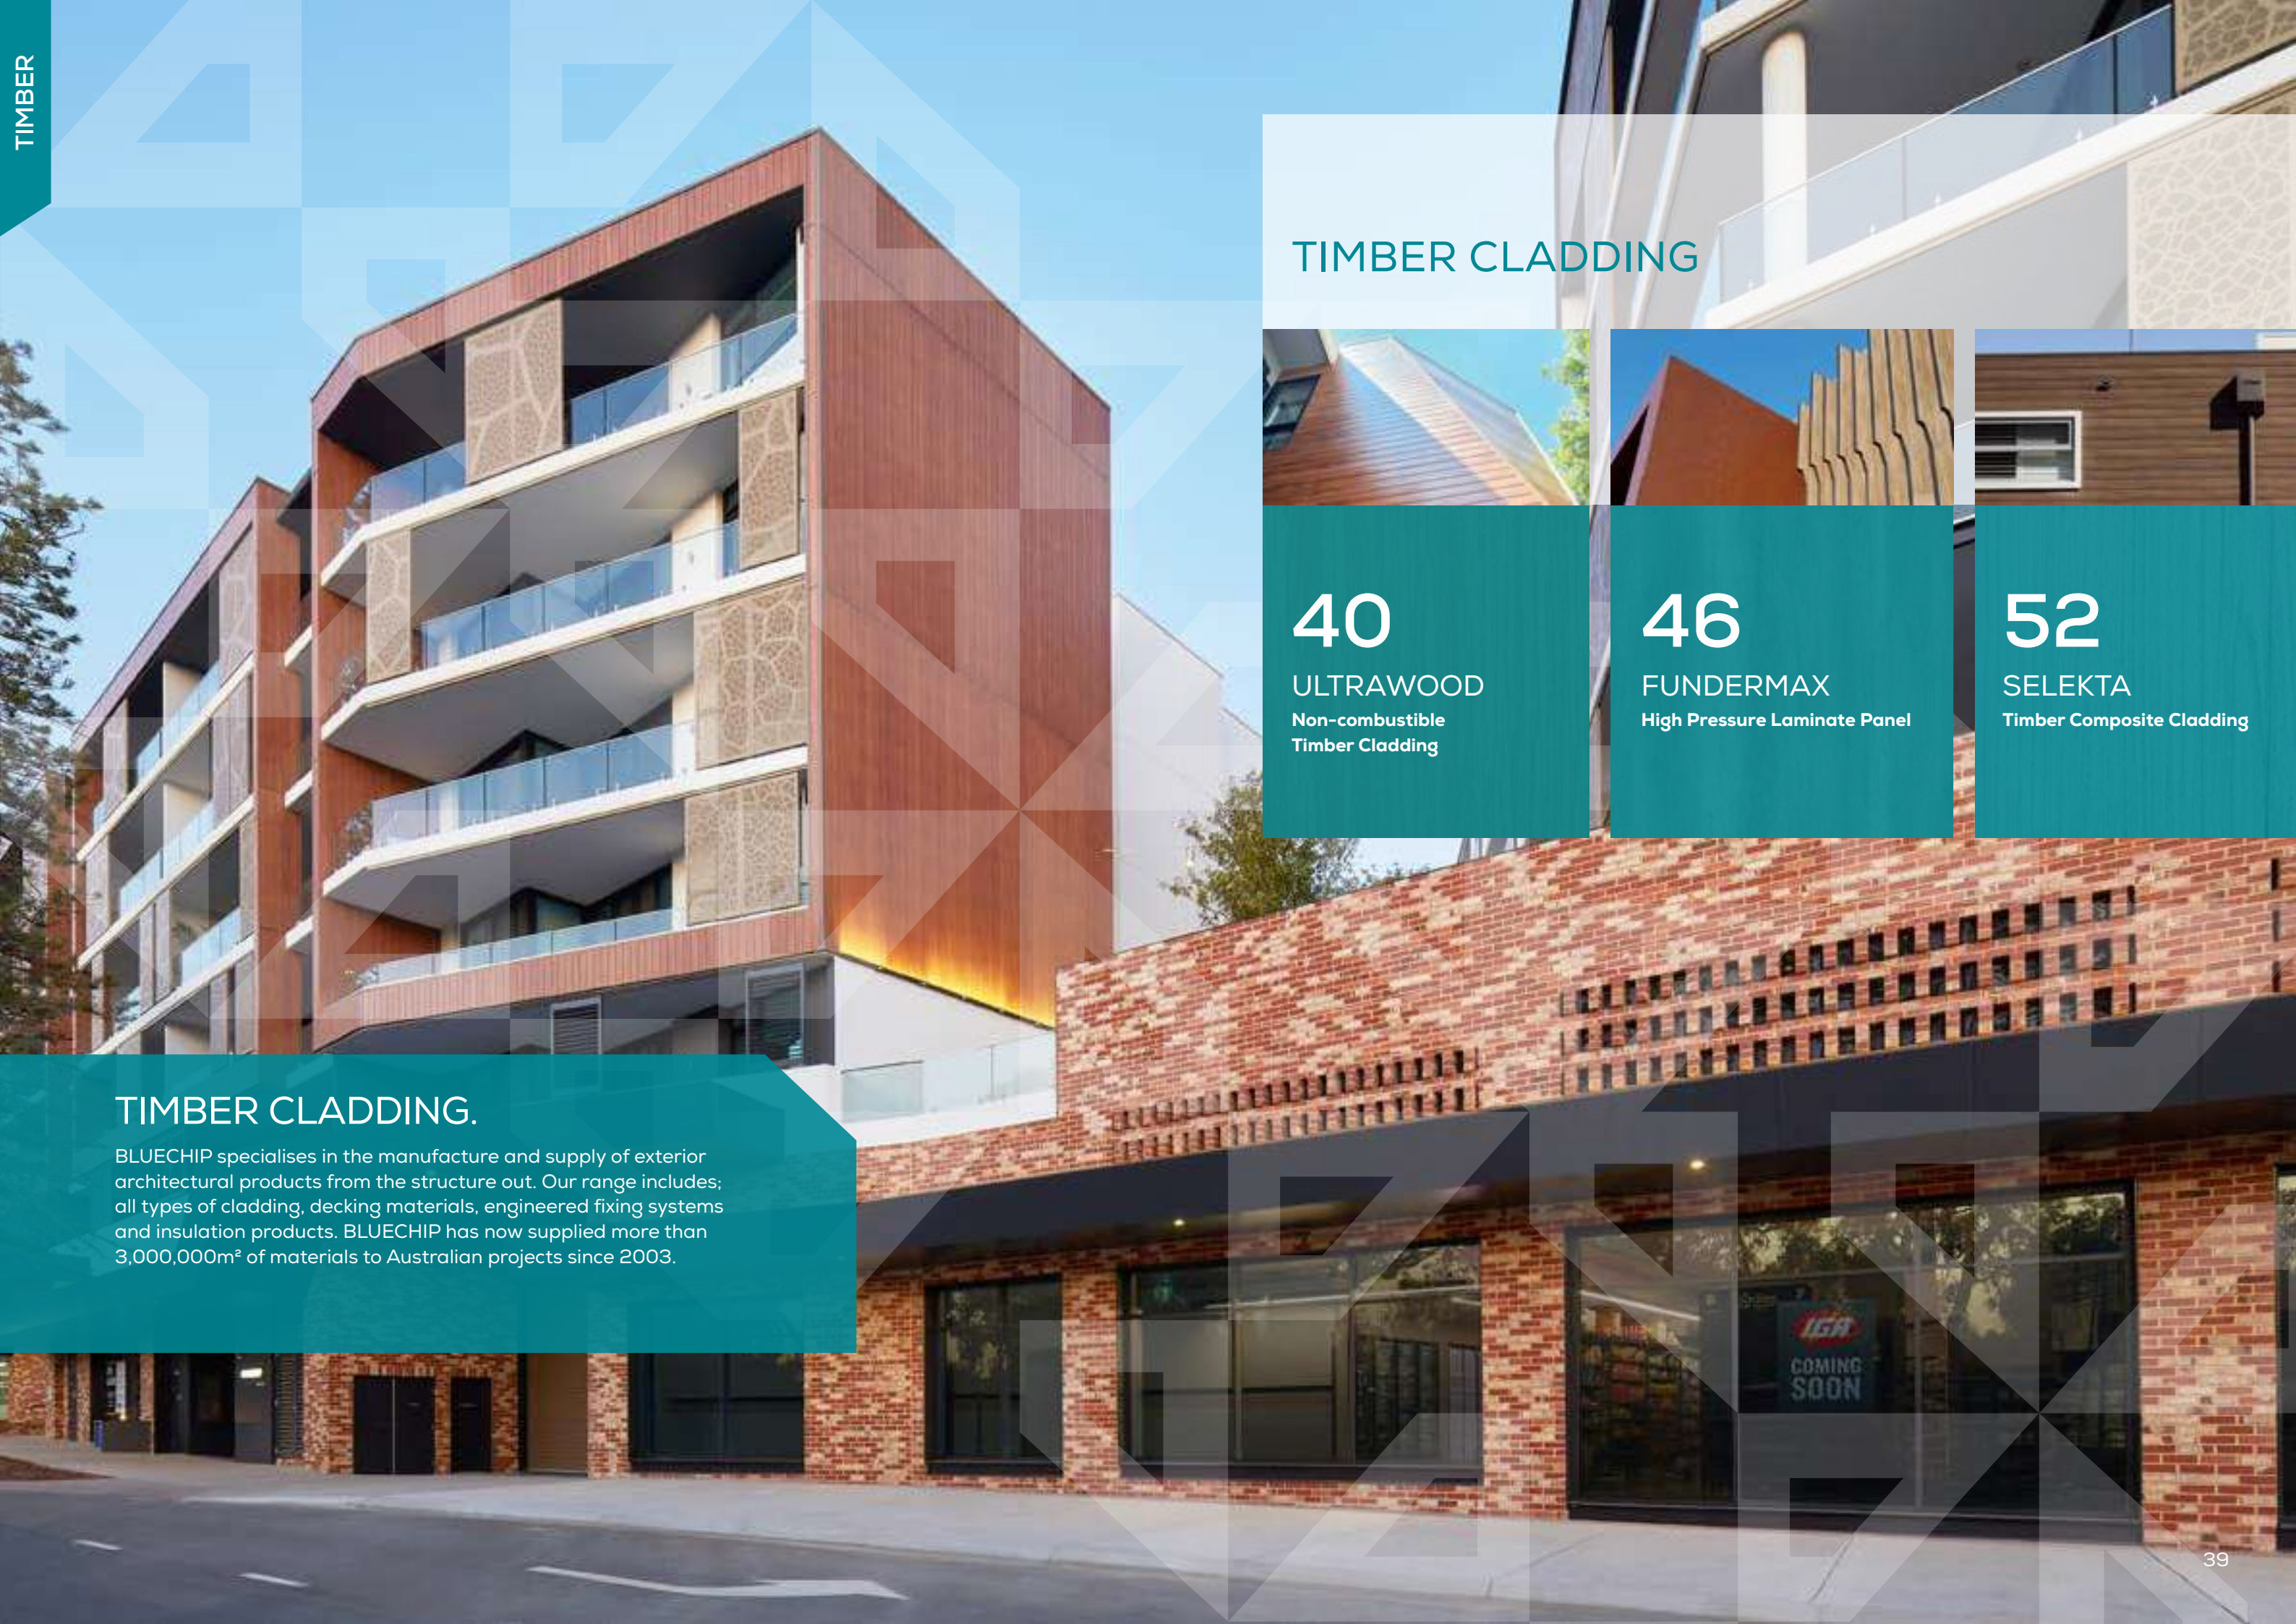

TIMBER CLADDING



40

ULTRAWOOD

Non-combustible
Timber Cladding



46

FUNDERMAX

High Pressure Laminate Panel



52

SELEKTA

Timber Composite Cladding

TIMBER CLADDING.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.


ULTRAWOOD

Non-combustible Timber Cladding & Battens


Description

ULTRAWOOD is an innovative new generation exterior cladding product made from highly durable marine-grade aluminium and factory pre-finished using the latest matt-effect technology in a wide range of realistic timber colours. Deemed-to-satisfy non-combustible in accordance with the BCA/ NCC, it has been fully tested in Australia by CSIRO achieving excellent results to AS 1530.1 and AS 1530.3. Eco-friendly, low maintenance and incredibly durable, ULTRAWOOD is ideal for type A and B construction projects such as high rise apartments and bushfire rated areas which require non-combustible cladding.


Product Benefits




AS 1530.1 NON-COMBUSTIBLE
ULTRAWOOD is a non-combustible cladding product in accordance with the relevant requirements of the NCC/BCA and has been tested by NATA accredited CSIRO to AS 1530.1 and AS 1530.3.




MARINE GRADE DURABILITY
Along with the marine-grade aluminium base material, the matt-effect ULTRAWOOD coating has undergone extensive durability testing and has been proven to perform in the harsh Australian conditions.




INTELLIGENT PROFILE
The ULTRAWOOD profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has double swarf-free contact points for superior consistency and weather-proofing.




EASY INSTALLATION
Supplied in custom lengths, ULTRAWOOD has 155mm cover per board making it fast and easy to install to a simple sub-frame at 600mm centres using secret-fix screws and a colour-matched trim system.




VERY LIGHT-WEIGHT
Compared to many other timber cladding products, ULTRAWOOD is a very light-weight system weighing only 8.75kg per square metre offering potential structural advantages and cost savings.



MANUFACTURER'S WARRANTY
Despite the undisputed durability of high-grade aluminium, ULTRAWOOD cladding offers a 10yr manufacturer's warranty on all different finishes for peace of mind and guaranteed performance.












NATURAL AESTHETICS
The beautiful looking finish on the ULTRAWOOD boards is possible because the latest matt-effect coating technology provides incredible richness and variation along with outstanding long-term durability.



COLOUR-MATCHED TRIMS
The ULTRAWOOD system is completed using the CLADTRIM click-together trim system covering all common construction details and finished in exactly the same matt-effect coating for a perfect match.

Profiles

	Specification Code: UW*G ULTRAWOOD Groove Profile
	Specification Code: UW*C ULTRAWOOD Cabin Cladding
	Specification Code: UW*S ULTRAWOOD Seam Cladding
	Specification Code: UW*B5050 ULTRAWOOD 50 x 50 Batten
	Specification Code: UW*B10050 ULTRAWOOD 100 x 50 Batten
	Specification Code: UW*B15050 ULTRAWOOD 150 x 50 Batten
	Specification Code: UW*B20050 ULTRAWOOD 200 x 50 Batten
	Specification Code: UW*B25050 ULTRAWOOD 250 x 50 Batten
	Specification Code: UW*B30050 ULTRAWOOD 300 x 50 Batten

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
UW*G15518	ULTRAWOOD 155 x 18mm Groove (Colour), 6.5m Length	4-5 Weeks	1 Length
UW*C15525	ULTRAWOOD 155 x 25mm Cabin (Colour), 6.5m Length	14-16 Weeks	50 Lengths
UW*S20548	ULTRAWOOD 205 x 48mm Seam (Colour), 6.5m Length	14-16 Weeks	50 Lengths
UW*BXXX50	ULTRAWOOD XXX x 50mm Batten (Colour), 6.5m Length	4-5 Weeks	1 Length
UWEXXX50	ULTRAWOOD XXX x 50mm Batten End Cap (Colour)	4-5 Weeks	1 End Cap
CFM40X	COLOURFIX 40mm x 8g End Cap Screw (Colour), 100 Pack	3-4 Weeks	1 Pack

(*) Indicates different finish options. U for Ultrawood Timber Colours and P for Powdercoat Colours

System Components

PAGE 74



FIRESPAN
AS 1530.1 Sarking

PAGE 88



MEMBRANES
Breathable Barriers

PAGE 78



BICEP & STUDTEK
Steel Facade System

PAGE 84



CLADTRIM
Colour-match Trims

PAGE 86



COLOURFIX
Coloured Fixings

INSTALL & TECHNICAL





































For installation and technical information, scan the QR code and view 'Downloads' tab.









ULTRAWOOD

Colour Chart

Ultrawood Colours

							
UW0123 Alabama White	UW0903 Ivory Coast	UW1315 Miry Oak	UW0402 Dusty Balsa	UW2015 Tasmanian Oak	UW1816 Rustic Pine	UW0615 Golden Oak	UW0120 African Teak
							
UW0813 Honey Maple	UW1907 Banjo Gum	UW0515 English Oak	UW2311 Woodstock	UW0406 Douglas Fir	UW1903 Southern Cyprus	UW0220 Burmese Teak	UW1005 Japanese Elm
							
UW1540 Dark Cedar	UW1102 Khaya Bean	UW1523 Old Walnut	UW0223 Black Wenge	UW1813 Rich Mahogany	UW1809 Red Iroko	UW1403 Native Cherry	UW2303 West Coast Cedar
							
UW0302 Coastal Blackwood	UW1120 Kontiki Balsa	UW0103 Alaskan Cedar	UW1703 Queensland Cedar	UW1510 Meranti	UW2203 Vancouver Cedar	UW0318 Californian Redwood	UW2503 Yukon Cedar
							
UW1410 Nannup Jarrah	UW0202 Bowral Bluegum	UW1311 Manjimup Karri	UW1580 African Ebony				

Anodised Colours

							
UL0320 Comet Trail**	UL1225 Light Year**	UL1305 Moonshine	UL1207 Lunar Glow	UL1914 Scintillation	UL0110 Astro Journey	UL0925 Infinity	UL1919 Solar Storm
							
UL0314 Constellation	UL1519 Orion Sky	UL1904 Stellar Distance					

Powdercoat Excel Colours

							
GA029A Pearl White Gloss	GD230A Domain Matt	GD031A Primrose Gloss	GD245A Classic Cream Matt	GA236A Surfmist Matt	GM235A Evening Haze Matt	GL284A Shale Grey Matt	GL252A Dune Matt
							
GD215A Harvest Matt	GD214A Paperbark Matt	GM242A Gully Matt	GM214A Jasper Matt	GG219A Headland Matt	GG262A Manor Red Matt	GM234A Terrain Matt	GL205A Woodland Matt
							
GM204A Riversand Matt	GL266A Windspray Matt	GP208A Basalt Matt	GL236A Ironstone Matt	GK203A Bushland Matt	GL210A Wallaby Matt	GJ203A Deep Ocean Matt	GL229A Monument Matt
							
GD274A Cove Matt	GK236A Pale Eucalypt Matt	GK298A Wilderness Matt	GK277A Mangrove Matt	GK274A Cottage Green Matt	GK030A Hawthorn Green Gloss	GK044A Heritage Green Gloss	GL035A Charcoal Gloss
							
GN231A Night Sky Matt							

(**) Gold anodised colours will not be consistent and will have signifigant variation of colour and tone both between different lengths and within a single length.



ULTRAWOOD

Colour Chart


Powdercoat Living Colours

							
GA030A Bright White Gloss	GA124A White Satin	GA078A Pearl White Gloss	GA160A Shoji White Satin	GA057A White Birch Gloss	GA211A Off White Matt	GL258A Oyster Grey Matt	GL107A APO Grey Satin
							
GD037A Primrose Gloss	GD025A Magnolia Gloss	GD016A Almond Ivory Gloss	GD188A Doeskin Satin	GD042A Rivergum Gloss	GD007A Barley Gloss	GD247A Stone Beige Matt	GM175A Pottery Satin
							
GL060A Storm Grey Gloss	GL175A Olde Pewter Satin	GG142A Claret Satin	GL031A Transformer Grey Gloss	GL040A Notre Dame Gloss	GM100A Hamersley Brown Satin	GL015A Roseberry Grey Gloss	GN063A Coral Black Gloss
							
GN248A Custom Black Matt	GN150A Black Satin						








Powdercoat Vivica Colours

				
GW003K Mercury Silver Gloss	GL211A Citi Matt	GY070A Ultra Silver Gloss	GY119A Nobel Silver Pearl Satin	GY184C Palladium Silver Pearl Satin
				
GY270A Asteroid Pearl Matt	GL249A Storm Front Matt	GY042A Black Onyx Gloss	GY237A Charcoal Pearl Matt	GM019A Charcoal Metallic Gloss








Precis Colours

	
GY21AA Natural Shimmer Matt	GY20BA Dark Bronze Matt





















Powdercoat Anodic Colours

						
GY221A Anodic Clear Matt	GD227A Anodic Off White Matt	GL237A Anodic Silver Grey Matt	GY235A Anodic Natural Matt	GY276A Anodic Champagne Matt	GY114A Anodic Bronze Satin	GL213A Anodic Dark Grey Matt









Powdercoat Sable Colours

						
GL320A Sable Grey Nurse	GY301A Sable Silver	GL277A Sable Brilliance	GN271A Sable Asteroid	GX350A Sable Cor Ten	GN297A Sable Bass	GN341A Sable Black

Powdercoat Ultriva Colours

							
YA278A Pearl White Matt	YY245A Citi Pearl Matt	YY276A Champagne Pearl Matt	YY223A Anodic Natural Matt	YX207C French Champagne Matt	YY25AA Precis Natural Shimmer Matt	YY22BA Precis Pure Gold Matt	YY20BA Precis Dark Bronze Matt
							
YN21BA Precis Black Ink Matt	YL264A Monument Matt	YN201A Ebony Matt	YY225A Bronze Pearl Matt	YY366A Sable Medium Bronze	YW100C Eternal Silver Satin	YY377A Sable Brilliance	YY263A Titanium Pearl Matt
							
YY270A Asteroid Pearl Matt	YY397A Sable Bass	YL238A Charcoal Matt	YY237A Charcoal Pearl Matt				

Powdercoat Vitality Colours

							
GE087A Brilliant Yellow Gloss	GK063A Lycra Strip Gloss	GF049A Sensation Gloss	GG155A Lobster Satin	GK051A Viper Green Gloss	GK043A Shamrock Green Gloss	GJ045A Bondi Blue Gloss	GJ174A Jaybird Satin


FUNDERMAX

High Pressure Laminate Panel

Description

FUNDERMAX Max Exterior F-Quality is a duromer high pressure laminate cladding manufactured in Austria in accordance with EN-438-6 type EDF. It is factory produced using double hardened acrylic PUR resins for excellent consistency and outstanding durability. Produced in a high pressure laminate press under very high temperature, FUNDERMAX high pressure laminate cladding is extremely tough with high resistance to fading, scratching and denting making it ideal for all interior or exterior cladding applications where a low maintenance finish and long-term durability is required.

Product Benefits




GRAFFITI RESISTANT
FUNDERMAX Max Exterior F-quality high pressure laminate cladding has a closed cell surface which prevents inks, paints and other graffiti materials from permanently harming the sheets.



FIRE RATED
FUNDERMAX Max Exterior high pressure laminate cladding has been tested to the Australian Standards by the NATA approved CSIRO achieving excellent results according to AS 3837 & AS 1530.3.




DOUBLE SIDED COLOUR
As standard all FUNDERMAX Max Exterior high pressure laminate cladding comes with the décor on both sides so that each side can be used. If one side is damaged during install simply flip to the other side.




MAINTENANCE FREE
FUNDERMAX Max Exterior high pressure laminate cladding has a very high density surface finish preventing accumulation of any dirt build up allowing for virtually no maintenance if any.



EXTREME DURABILITY
FUNDERMAX Max Exterior high pressure laminate cladding is extremely durable even in the harshest external environments. A project installed in 1978 which was tested 33 years later had little change.



FULL WARRANTY
FUNDERMAX Max Exterior high pressure laminate cladding is backed up with a 10 year warranty. However the life expectancy exceeds 33 years and has been proven to outlast many alternatives.



UV RESISTANT
FUNDERMAX Max Exterior high pressure laminate cladding is colourfast and offer exceptional resistance to UV light. According to EN ISO 4892-3 they are extremely lightfast with very minimal change.



LARGE COLOUR RANGE
FUNDERMAX Max Exterior high pressure laminate cladding is available in a huge range of decors from solid, metallic, timber, metal, concrete, and graphic print options. The limit is your imagination.

Product Range



Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
FUNDERMAX Nature Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Material Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Metallic & Solid Colours	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Authentic Decor	4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Individual Decor	2800, 4100 x 1300mm	14-16 Weeks	100m²

System Components



*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 40.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



























FUNDERMAX

Colour Chart







Nature Decors

							
FX0919 Ecuador	FX0922 Amazon	FX0601 Sun Pear	FX5171 Polar Oak	FX5172 Marshland Oak	FX5173 Barrique Oak	FX0923 Enigma	FX0924 Taurus
							
FX0935 Voyager	FX0925 Butterfly	FX0926 Jazz	FX0936 Thunder	FX0927 Creek	FX0801 Fir Platinum	FX0803 Tyrol Pine	FX0928 Gold Coast
							
FX0929 Antique	FX0930 Phoenix	FX0931 Akro Almond	FX0161 Light Afro	FX0932 Akro Terra	FX0168 Akro Rust	FX0169 Akro Ruby	FX0160 Dark Afro









Material Decors

							
FX0394 Moonwalk	FX0344 Riverside	FX0426 Loft	FX0156 Afro Patina	FX0798 Tambora	FX0793 Patina Tin	FX0794 Patina Bronze	FX0386 Blues
							
FX0387 Reggae	FX0162 Afro Sahara	FX0158 Afro Grey	FX0159 Afro Black	FX0028 Prado Brown	FX0026 Prado Alu Grey	FX0027 Prado Agate Grey	FX0496 Colosseum
							
FX0497 Stonehenge	FX0421 Venus	FX0406 Rockstar	FX0427 Skyline	FX0428 Cave	FX0429 Corro	FX0480 Kings Cross	FX0481 Satellite







Metallic Colours

					
FX0066G Sand Metallic	FX0768G Sparrow Metallic	FX5032G Cinnamon Metallic	FX0077G Charcoal Metallic	FX0080G Black Metallic	FX0056G Atlantis Metallic

Black, Grey & White

							
FX0085 White	FX0091 Starlight	FX0742 Pebble Grey	FX0741 Birch Grey	FX0074 Pastel Grey	FX0776 Concrete Grey	FX0747 Medium Grey	FX0753 Cool Grey Medium
							
FX0070 Carbon Grey	FX0075 Dark Grey	FX0077 Charcoal	FX0080 Black				

Neon


					
FX6010 Electric	FX6020 Satsuma	FX6030 Candy	FX6031 Berry	FX6040 Grape	FX6050 Pool




FUNDERMAX

Colour Chart


Yellow




FX0687
Maize




FX0647
Golden Yellow




FX0736
Saffron



FX0851
Winter White



FX0065
Ivory



FX0654
Jasmin

Blue



FX0706
Glacier Blue



FX0703
Dove Blue



FX0712
Steel Blue



FX0717
Atlantic




FX0237
Gentian Blue




FX0702
Night Blue


Green




FX0725
Yellowish Green




FX0623
Green




FX0059
Dark Green




FX0592
Kiwi Green




FX0663
Reseda Green




FX0662
Jade Green




FX0591
Fir Green




FX0611
Pale Olive




FX0612
Olive



FX0056
Atlantis




FX0617
Petrol Green




FX0631
Turquoise


Red




FX0674
Mars Red




FX0689
Dark Red




FX3003
Rubinus Red



FX0691
Purple




FX0680
Wine Red




FX3007
Black Red


Brown




FX0645
Tobacco




FX0657
Sepia Brown




FX0768
Sparrow



FX0692
Old Pink




FX0661
Terracotta




FX5032
Cinnamon


Pastel




FX0733
Pale Ivory




FX0066
Sand




FX0073
Hygienic White



FX0627
Hygienic Beige



FX0651
Cream



FX0693
Orchid

Authentic



FXAU
Authentic

Individual Decor



FXID
Individual Decor



SELEKTA

Timber Composite Cladding

Description

Made in Germany, SELEKTA timber composite cladding is a unique, prefinished product with a beautiful timber grain embossed surface. Designed for stability and longevity with style, SELEKTA timber composite cladding is eco-friendly, maintenance free and incredibly easy to install. SELEKTA timber composite cladding has been subjected to extreme endurance tests, including swell tests and UV tests. After being subjected to a wide range of extreme environmental conditions and temperature fluctuations between -30° and +70° Celsius, the product responded brilliantly, outlasting wind and weather for 30 years.

Product Benefits



NCC 2022 COMPLIANCE
SELEKTA timber composite cladding is compliant with NCC 2019 for use as external cladding on all type C* construction projects ensuring you are specifying a compliant product tested to Australian standards.




SECRET FIXING
SELEKTA timber composite cladding comes with a simple tongue and groove fixing system with machined screw slots for ease and speed of installation saving any need for pre-drilling each length.



BAL 29 FIRE RATING
SELEKTA timber composite cladding has been tested to AS fire standards and achieves a BAL 29 fire rating along with excellent group rating as per AS 3837 for exterior cladding.



NON LEACHING
SELEKTA timber composite cladding is the only timber based cladding that cannot leach as there are no tannins impregnated into the profile allowing for a beautiful look that will last.



AS 5113 FIRE TESTING
SELEKTA timber composite cladding has been tested as per the new AS 5113 full-scale facade fire test which is required for CV3 performance based solutions on all type A & B construction.



ACOUSTIC RATING
Laboratory acoustic testing results are available. SELEKTA timber composite cladding is the perfect material to use on multi-residential high density developments to improve acoustics.




MAINTENANCE FREE
SELEKTA timber composite cladding is guaranteed not to rot, split, warp or check. Highly resistant to damage caused by termites and fungal decay and does not need any on-going sealing, oiling or re-painting.



FULL WARRANTY
SELEKTA timber composite cladding comes with a comprehensive 10 year warranty backed by the German based manufacturer. Guaranteed quality and peace of mind for your project.

Profile



Specification Code: SK**** SELEKTA 155 x 18

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SK1560	SELEKTA 155 x 18mm White Birch, 5.4m Length	Stock	1 Length
SK0820	SELEKTA 155 x 18mm Cedar, 5.4m Length	Stock	1 Length
SK1520	SELEKTA 155 x 18mm White Oak, 5.4m Length	Stock	1 Length
SK1570	SELEKTA 155 x 18mm Silver Oak, 5.4m Length	Stock	1 Length
SK1540	SELEKTA 155 x 18mm Dark Cedar, 5.4m Length	Stock	1 Length
SK1510	SELEKTA 155 x 18mm Meranti, 5.4m Length	Stock	1 Length
SK1580	SELEKTA 155 x 18mm African Ebony, 5.4m Length	Stock	1 Length
SKMISC	Group 1 Colours are Supplied to Order, 5.4m Lengths	10-12 Weeks	288 Lengths
SKMISC	Group 2 Colours are Supplied to Order, 5.4m Lengths	10-12 Weeks	288 Lengths
SKS****	SELEKTA Touch-up & End-sealer (Insert Colour)	Stock	1 Can

System Components



PAGE 74
FIRESPAN
AS 1530.1 Sarking



PAGE 88
MEMBRANES
Breathable Barriers



PAGE 78
BICEP & STUDTEK
Steel Facade System



PAGE 84
CLADTRIM
Colour-match Trims



PAGE 86
COLOURFIX
Coloured Fixings

*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 40.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



SELEKTA

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Timber Colours

SK1560
White Birch (s)

SK1570
Silver Oak (s)

SK0820
Cedar

SK1520
White Oak (s)

SK1540
Dark Cedar (s)

SK1510
Meranti (s)

SK1580
African Ebony (s)

Solid Colours - Group 1

SK6360
Coast White

SK2150
Cream White

SK6660
Lava White

SK6510
Stone White

SK6710
Ashes White

SK6760
Earth White

SK6810
Dune White

SK6260
Arctic White

SK6370
Soft Coast

SK6270
Soft Arctic

SK6340
Deep Ocean

SK6390
Deep Coast

SK6140
Deep Reed

SK6790
Deep Earth

Solid Colours - Group 2

SK6010
Dawn White

SK6060
Moss White

SK6860
Moon White

SK6170
Soft Fog

SK6090
Deep Moss

SK6310
Polar

SK6210
Sea

SK6320
Soft Ocean

SK6330
Ocean

SK6290
Deep Arctic

SK6450
Sand

SK6580
Canyon

SK6590
Deep Canyon

SK6820
Soft Dune

SK6800
Bright Earth

SK6630
Volcanic

SK6650
Bright Volcanic

SK6400
Royal Red

SK6740
Turf

SK6730
Ashes



DECKING PRODUCTS



58

TRAXION

Mineral-fibre
Composite Decking



60

CAMO

Secret Fix Decking Clips
& Screws



61

PRO PLUGS

Secret Fix Decking Plugs
& Screws

DECKING.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

TRAXION

Mineral-Fibre Composite Decking

Description

TRAXION mineral-fibre decking is a giant leap forward in wood-alternative decking. Made in the USA, it has the industry's best strength-to-weight ratio, is incredibly stable and doesn't absorb moisture. The durable polymer cap stock won't stain or fade and it provides the highest level slip resistance when tested to Australian standards. The patented technology creates a fibre-like structure inside the material, similar to wood, giving it unmatched strength and the lightweight boards are easy-to-handle on the job site. Quite simply, TRAXION is the best decking material on the market today.

Product Benefits



EXCELLENT SLIP RESISTANCE
TRAXION mineral-fibre decking achieves the highest possible slip rating of P5 when tested to the latest Australian standard AS 4586 meaning it is compliant for use in all applications.



HIGH STRENGTH TO WEIGHT RATIO
Kilo-for-kilo, TRAXION mineral-fibre decking delivers unprecedented strength and much less dense compared to virtually all other composite construction materials



MAINTENANCE FREE
TRAXION mineral-fibre decking contains no cellulose, has no open porosity structure, and is not degraded by common mould enzymes so simply wipe clean at your leisure.



LOW THERMAL EXPANSION
TRAXION mineral-fibre decking has a far lower rate of thermal expansion than other composites. This dimensional stability is a huge advantage in maintaining performance and appearance.



INDUSTRY LEADING WARRANTY
TRAXION mineral-fibre decking comes with the industry's leading warranty offering a 25-year Structural and a 25-year Stain & Fade guarantee backed up by the manufacturer in USA.



NO MOISTURE ABSORPTION
Unlike many other composites, TRAXION mineral-fibre decking absorbs virtually no moisture; immersion testing shows maximum moisture absorption values of less than 0.2%.




EXTREME STRENGTH
TRAXION mineral-fibre decking has exceptional strength due to its oriented internal fibre structure that is a remarkable replication of wood's internal structure.




RESISTANCE TO EVERYTHING
TRAXION mineral-fibre decking is resistant to almost everything including UV, chalking, rot, leaching, cracking, denting, scratching, splintering and insects.

Profiles



Specification Code: T*X14022 TRAXION Secret Fix Decking



Specification Code: T*P14022 TRAXION Pencil Round

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
T*X14022	TRAXION 140 x 22mm Secret Fix Decking, 5.8m Length	Stock	1 Length
T*P14022	TRAXION 140 x 22mm Pencil Round, 5.8m Length	Stock	1 Length
T*X18522	TRAXION 185 x 22mm Secret Fix Decking, 5.8m Length	12-14 Weeks	100m²
T*P18522	TRAXION 185 x 22mm Pencil Round, 5.8m Length	12-14 Weeks	100m²
T*X23522	TRAXION 235 x 22mm Secret Fix Decking, 5.8m Length	12-14 Weeks	100m²
T*P23522	TRAXION 235 x 22mm Pencil Round, 5.8m Length	12-14 Weeks	100m²
T*P9022	TRAXION 90 x 22mm Screening Batten, 5.8m Length	12-14 Weeks	72 Lengths

System Components

PAGE	DESCRIPTION	LEAD TIME
60	CAMO & PROPLUG Secret Fix Decking Systems	Stock

Colour Chart



TahitiSeychellesCapriMauiSardiniaKiribatiDominica


*Colours are subject to availability and lead times may apply for large commercial orders.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Camo Secret Fix Decking System

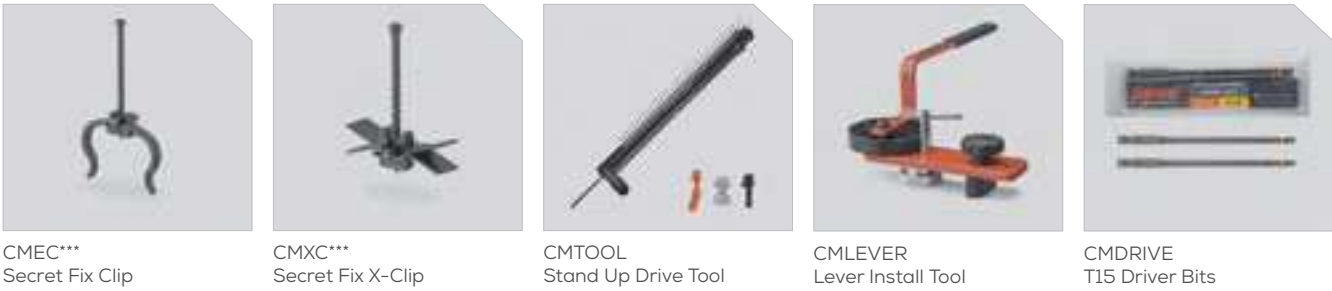

Camo Fixings

CODE	DESCRIPTION	LEAD TIME	MOQ
CMEC90	CAMO Secret Fix Clip with Timber Screw, 90 Pack	Stock	1 Pack
CMEC450	CAMO Secret Fix Clip with Timber Screw, 450 Pack	Stock	1 Pack
CMEC900	CAMO Secret Fix Clip with Timber Screw, 900 Pack	Stock	1 Pack
CMXC90	CAMO Secret Fix X-Clip with Timber Screw, 90 Pack	Stock	1 Pack
CMXC90M	CAMO Secret Fix X-Clip with Metal Screw, 90 Pack	Stock	1 Pack
CMXC450M	CAMO Secret Fix X-Clip with Metal Screw, 450 Pack	Stock	1 Pack
CMSC25	CAMO Starter Clip with Timber Screw, 25 Pack	Stock	1 Pack

Camo Tools

CODE	DESCRIPTION	LEAD TIME	MOQ
CMTOOL	CAMO Stand Up Drive Tool	Stock	1 Tool
CMLEVER	CAMO Lever Installation Tool	Stock	1 Tool
CMDRIVE	CAMO Driver Bit T15 (Use with CMTOOL)	Stock	1 Bit

Pro Plug Secret Fix Decking System



Pro Plug Fixings

CODE	DESCRIPTION	LEAD TIME	MOQ
SBM4010	STARBORN 40mm x 10g Metal Screw, 375 Pack	Stock	1 Pack
SBT6510	STARBORN 65mm x 10g Timber Screw, 375 Pack	Stock	1 Pack
PP*125	PRO PLUG 125 Handy Pack (Timber Screws, Plugs & Tool)	Stock	1 Pack
PP*375	PRO PLUG Secret Fix Plug (Insert Colour), 375 Pack	Stock	1 Pack

*The asterisk in the product code denotes colour selection as follows for an exact match to TRAXION decking colours: T = Tahiti, S = Seychelles, C = Capri, M = Maui, N = Sardinia, K = Kiribati & D = Dominica.

Pro Plug Tool


CODE	DESCRIPTION	LEAD TIME	MOQ
PPDEPTH	PRO PLUG Depth Setting Driver Tool	Stock	1 Tool
PPDRILL	PRO PLUG Drill Bit For Use With Other Screws	Stock	1 Bit



INSULATION.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

INSULATION PRODUCTS

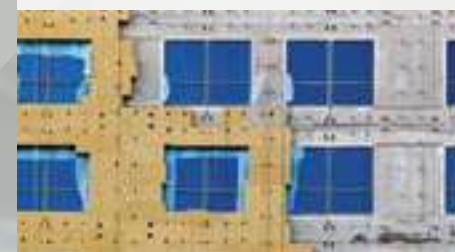

64

IROCK
Non-Combustible Facade
& Cavity Insulation



66

IROCK PLUS
Non-Combustible
Soffit Insulation



68

IBOARD
Rigid PIR Insulation Board



70

IBOARD G1
Group 1 Insulated
Soffit Lining



72

INSULBLUE
Foam Insulation



74


FIRESPAN
Non-combustible Sarking

Non-Combustible Facade & Cavity Insulation


Description

IROCK non-combustible facade & cavity insulation is a thermal and acoustic insulation material widely used in both external and internal wall applications that require high levels of fire safety and thermal performance. IROCK is manufactured by spinning a molten mixture of natural rock materials and other additives to create fine wool-like fibres which are bonded together using a thermoset resin to form a rigid insulation board. Compliant with NCC 2019 & NCC 2022, IROCK offers excellent long-term ageing performance and superior resistance to water absorption compared to other common insulation materials.


Product Benefits




NON-COMBUSTIBLE
IROCK is deemed non-combustible when tested to AS 1530.1 meaning it is compliant for use in external walls and cladding systems which are required to be non-combustible in buildings of types A & B construction.




COST EFFECTIVE
With a nominal thermal conductivity of 0.036 W/mK and a very economical price-point, IROCK offers excellent thermal efficiency for minimal upfront cost along with life-cycle energy savings for the building.




MOISTURE RESISTANT
Although it is not suitable for permanent immersion or exposure to drenching, IROCK insulation board's thermal performance will not be adversely effected by condensation or contact with liquid water.




ENVIRONMENTALLY FRIENDLY
Largely manufactured from recycled materials and natural rock, IROCK is environmentally friendly as an initial product. It also offers numerous environmental benefits in application as thermal insulation.




EXCELLENT ACOUSTIC PERFORMANCE
Along with excellent fire safety and thermal performance, IROCK also provides an excellent acoustic performance of NRC >1.0 in accordance with ISO 354-2006 providing an ideal solution for party walls.



NCC 2022 COMPLIANT
NCC 2022 Clause C2D10 specifically requires all components of external walls including cladding, insulation and framing to be non-combustible and IROCK is one of only a few materials that meet this criteria.



LIGHT-WEIGHT & DURABLE
IROCK rockwool insulation boards are both light-weight and highly durable for easy hassle-free handling onsite and they can be easily cut and formed to suit almost any application.



SUPERIOR AGEING PERFORMANCE
Unlike low density batts which tend to slump in vertical applications or PIR and phenolic insulation which lose thermal performance over time, IROCK is anti-slump and has excellent long-term ageing performance.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Product Range + Bicep Facade System (See page 78)



Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IR301206	R0.83	IROCK 30mm Rigid Insulation, 1200 x 600mm	8-10 Weeks	2,160m ²
IR401206	R1.11	IROCK 40mm Rigid Insulation, 1200 x 600mm	Stock	8 Boards
IR501206	R1.39	IROCK 50mm Rigid Insulation, 1200 x 600mm	8-10 Weeks	1,368m ²
IR601206	R1.67	IROCK 60mm Rigid Insulation, 1200 x 600mm	Stock	5 Boards
IR801206	R2.22	IROCK 80mm Rigid Insulation, 1200 x 600mm	Stock	4 Boards
IR1001206	R2.78	IROCK 100mm Rigid Insulation, 1200 x 600mm	Stock	8 Boards
IR1201206	R3.33	IROCK 120mm Rigid Insulation, 1200 x 600mm	Stock	5 Boards

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	ASTM C518	0.036 W/mK
Acoustic Performance	ISO 354-2006	1.0 NRC
Non-combustible (DtS)	AS 1530.1	Pass
Ignitability Index	AS 1530.3	0
Spread of Flame Index	AS 1530.3	0
Heat Evolved Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	0-1
Material Density	Actual	100 kg/m ³
Compressive Strength	ASTM C165-07	10 KN/m ²
Maximum Service Temperature	Actual	<750°C
Melting Temperature	Actual	>1000°C
Rockwool Content	Actual	>95%
Resin Content	Actual	<5%
Water Absorption	EN 1609	<1.1%
Fungal Resistance	ASTM C655	Pass


IROCK PLUS

Non-Combustible Prefinished Rigid Soffit Insulation


Description

Non-combustible as per NCC 2022, Clause C2D10(6)(g), IROCK PLUS soffit insulation is a thermal and acoustic insulation material comprising of a rigid insulation board bonded to either a non-combustible FIRESpan facer or a pure aluminium facer. Providing an attractive white finish and high-density 10 KN/m2 compressive strength, IROCK PLUS is the safe and responsible choice for all under-slab soffit applications such as car-parks, high-rise apartment buildings and health buildings. Compared to alternative materials, IROCK PLUS produces much less smoke in a fire scenario and has superior ageing performance.


Product Benefits




NON-COMBUSTIBLE
IROCK PLUS is deemed non-combustible when tested to AS 1530.1 and AS 1530.3 in accordance with NCC 2022, Clause C2D10(6)(g) meaning it can be used wherever a non-combustible material is required.




COST EFFECTIVE
With a nominal thermal conductivity of 0.036 W/mK and a very economical price-point, IROCK PLUS offers excellent thermal efficiency for minimal upfront cost along with life-cycle energy savings for the building.




MOISTURE RESISTANT
Although not suitable for permanent immersion or exposure to drenching, IROCK PLUS insulation board's thermal performance will not be adversely affected by condensation or contact with liquid water.




ENVIRONMENTALLY FRIENDLY
Largely manufactured from recycled materials and natural rock, IROCK PLUS is environmentally friendly as an initial product. It also offers numerous environmental benefits in application as thermal insulation.




EXCELLENT ACOUSTIC PERFORMANCE
Along with excellent fire safety and thermal performance, IROCK PLUS also provides an excellent acoustic performance of NRC >1.0 in accordance with ISO 354-2006 providing an ideal solution for party walls.



NCC 2022 COMPLIANT
NCC 2022 Clause C2D10 specifically requires all components of external walls including cladding, insulation and framing to be non-combustible and IROCK PLUS is one of only a few materials that meet this criteria.



LIGHT-WEIGHT & ATTRACTIVE
Not only are IROCK PLUS insulation boards very lightweight (only 100kg/m3), they also offer a very attractive white finish ideal for exposed under-slab soffit applications such as shopping centre car parks.



SUPERIOR AGEING PERFORMANCE
Unlike low density batts which tend to slump in vertical applications or PIR and phenolic insulation which lose thermal performance over time, IROCK PLUS is anti-slump and has excellent long-term ageing performance.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.





Product Range + Bicep Ceiling System



IROCK PLUS
White Soffit Insulation



INSULTAPE
White Joint Tape



IROCK + BICEP
Ceiling System

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IRP601206	R1.67	IROCK PLUS 60mm Rockwool, 1200 x 600mm	8-10 Weeks	5 Boards
IRP801206	R2.22	IROCK PLUS 80mm Rockwool, 1200 x 600mm	8-10 Weeks	4 Boards
IRD1001206	R2.78	IROCK PLUS 100mm Rockwool, 1200 x 600mm	8-10 Weeks	5 Boards
IRD1201206	R3.33	IROCK PLUS 120mm Rockwool, 1200 x 600mm	8-10 Weeks	5 Boards
ITW4850	NA	INSULTAPE 48mm White High Tack Tape, 50m Roll	Stock	1 Roll

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	ASTM C518	0.036 W/mK
Acoustic Performance	ISO 354-2006	1.0 NRC
Non-combustible (DtS)	AS 1530.1	Pass
Ignitability Index	AS 1530.3	0
Spread of Flame Index	AS 1530.3	0
Heat Evolved Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	0-1
Material Density	Actual	100 kg/m³
Compressive Strength	ASTM C165-07	10 KN/m²
Maximum Service Temperature	Actual	<750°C
Melting Temperature	Actual	>1000°C
Rockwool Content	Actual	>95%
Resin Content	Actual	<5%
Water Absorption	EN 1609	<1.1%
Fungal Resistance	ASTM C655	Pass


IBOARD

Rigid PIR Insulation Board


Description

IBOARD rigid insulation board is composed of a closed-cell thermoset polyisocyanurate foam core with two reflective foil facings. Tested in accordance with AS/NZ standards to comply with BCA/NCC requirements in concealed applications, IBOARD rigid insulation is manufactured using CFC/HCFC-free blowing agents that have zero Ozone Depletion Potential (ODP). Providing superior fire safety and higher R-values from less thickness, IBOARD rigid insulation gives sustained thermal performance over time and is widely used in brick cavity, frame-wall and concealed soffit applications.


Product Benefits




SUPERIOR FIRE PERFORMANCE
IBOARD rigid insulation offers superior results than alternative products when tested to AS 1530.3, the relevant Australian fire standard for concealed wall and soffit applications.




HIGHER R-VALUE
IBOARD rigid insulation provides excellent thermal properties with one of the lowest thermal conductivity ratings of any insulation material on the market at 0.022 W/mK.




SUPERIOR AGEING PERFORMANCE
Due to it's outstanding resistance to moisture and excellent compressive strength, IBOARD rigid insulation offers much better thermal ageing performance than other products.




ENVIRONMENTALLY FRIENDLY
IBOARD rigid insulation is manufactured in Europe under strict quality control using only CFC/HCFC free blowing agents which have Zero Ozone Depletion Potential (ODP).




100% NON-CORROSIVE
Unlike some other insulation products, IBOARD core material is 100% non-corrosive and will not cause corrosion issues if it comes in contact with structural steel or fixings.



CLEAR CAVITY MAINTAINED
When IBOARD rigid insulation is used in wall cavity applications a clear cavity is still maintained making the cavity easily accessible for services such as electricity and water.



ZERO FORMALDEHYDE
IBOARD rigid insulation contains zero traces of formaldehyde and it is fibre-free making it non-irritant to the skin, non-allergenic and safer compared to other products.



MICRO CELL TECHNOLOGY
IBOARD core material has a much finer cell structure with extremely low water absorption compared to other products (<0.6%) so its R-value is retained long-term and it is rot and mould proof.

Product Range



Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IBS302312	R1.36	IBOARD 30mm PIR Insulation, 2270 x 1200mm	Stock	1 Board
IBS402312	R1.82	IBOARD 40mm PIR Insulation, 2270 x 1200mm	Stock	1 Board
IBS502312	R2.27	IBOARD 50mm PIR Insulation, 2270 x 1200mm	Stock	1 Board
IBS602312	R2.73	IBOARD 60mm PIR Insulation, 2270 x 1200mm	Stock	1 Board
IBS702312	R3.18	IBOARD 70mm PIR Insulation, 2270 x 1200mm	3-5 Days	1 Board
IBS802312	R3.64	IBOARD 80mm PIR Insulation, 2270 x 1200mm	3-5 Days	1 Board
IBS902312	R4.09	IBOARD 90mm PIR Insulation, 2270 x 1200mm	3-5 Days	1 Board
IBS1002312	R4.55	IBOARD 100mm PIR Insulation, 2270 x 1200mm	3-5 Days	1 Board

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP7250	INSULTAPE 72mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
IUC250	IBOARD Universal Cavity Retainer Clip, 250 Pack	Stock	1 Pack

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	ASTM C518	0.022 W/mK
Emittance	ASTM E408	0.05
Spread of Flame Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	2
Tensile Strength Perpendicular to Faces	EN 1607	80 kPa
Compressive Strength	EN 826	>110 kPa

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




IBOARD G1

Group 1 Insulated Soffit Lining


Description

IBOARD G1 insulated soffit lining comprises of a Group 1 rated 6mm fibre cement facer bonded to a concealed rigid insulation board composed of a closed-cell thermoset polyisocyanurate foam. Tested in accordance with relevant AS/NZ standards, IBOARD G1 is compliant for use in all soffit applications in accordance with NCC 2022. Providing higher R-values from less thickness, IBOARD G1 allows increased clearance height within car parks while still meeting thermal requirements making it the safest and most practical option for all concrete soffit and under-slab applications.


Product Benefits




GROUP 1 FIRE RATING*
IBOARD G1 insulated soffit lining has a non-combustible fibre cement facer which achieves a Group 1 fire rating in accordance with AS 5637 for superior safety and compliance in all under slab soffit applications.




ZERO FORMALDEHYDE
IBOARD G1 soffit insulation contains zero traces of formaldehyde and it is fibre-free making it non-irritant to the skin, non-allergenic and safer compared to other products.




UNLIMITED COLOURS
IBOARD G1 soffit insulation has an attractive light grey fibre cement finish which can be left untreated, painted insitu, or supplied prefinished in unlimited custom colours to your selection.




AUSTRALIAN FIRE TESTING
IBOARD G1 insulated soffit lining has NATA accredited testing to relevant Australian fire standards and it's Group 1 fire rating means it is compliant with NCC 2022 for all lining applications.




SUPERIOR AGEING PERFORMANCE
Due to it's outstanding resistance to moisture and excellent compressive strength, IBOARD G1 soffit insulation offers much better thermal ageing performance than other products.



ENVIRONMENTALLY FRIENDLY
IBOARD G1 soffit insulation is manufactured in Europe under strict quality control using only CFC/HCFC free blowing agents which have Zero Ozone Depletion Potential (ODP).



100% NON-CORROSIVE
Unlike some other insulation products, IBOARD G1 core material is 100% non-corrosive and will not cause corrosion issues if it comes in contact with structural steel or fixings.



MICRO CELL TECHNOLOGY
IBOARD G1 has a much finer cell structure with extremely low water absorption compared to other products (<0.6%) so it's R-value is retained long-term and it is rot and mould proof.

*Group 1 fire rating applies to the exposed fibre cement facing in accordance with AS 5637 and NCC 2022 requirements.

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IBG362412	R1.38	IBOARD 36mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG462412	R1.84	IBOARD 46mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG562412	R2.29	IBOARD 56mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG662412	R2.75	IBOARD 66mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG762412	R3.20	IBOARD 76mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG862412	R3.66	IBOARD 86mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG962412	R4.11	IBOARD 96mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards
IBG1062412	R4.57	IBOARD 106mm G1 Insulation, 2400 x 1200mm	1-2 Weeks	50 Boards

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity (Insulation)	ASTM C518	0.022 W/mK*
Thermal Conductivity (Fibre Cement)	ASTM C518	0.23 W/mK*
Group Rating	AS 5637	Group 1**
Average Specific Extinction Area	m²/kg	<250**
Smoke Growth Rate (SMOGRA)	m²/s2x1000	<100**
Spread of Flame Index	AS 1530.3	0***
Smoke Developed Index	AS 1530.3	2***
Tensile Strength Perpendicular to Faces	EN 1607	80 kPa
Compressive Strength	EN 826	>110 kPa
Compressive Strength at 10% Deformation	EN 826	>150 kPa

*Material R-values are calculated based on the insulation thickness at 0.022 W/mK in addition to the 6mm fibre cement at 0.23W/mK. **The AS 5637 testing and Group 1 rating applies to the exposed fibre cement facer, being the wall or ceiling lining, in accordance with NCC 2022 requirements. ***The AS 1530.3 testing applies to the PIR insulation board, being a concealed insulation material, in accordance with NCC 2022 requirements.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.




INSULBLUE

Foam Insulation


Description

INSULBLUE foam insulation products are a heavy duty 3-in-1 insulation, thermal and radiant barrier comprising of an advanced high density closed cell XPE foam material sandwiched between two layers of poly woven foil. INSULBLUE foam insulation provides excellent thermal properties and reflectivity and is suitable for use in roof, cavity, wall wrap and floor systems for all construction types. It provides superior thermal ratings to standard sarking and helps to reduce thermal bridging between building elements such as exterior cladding and structure.


Product Benefits




EASY TO USE
INSULBLUE foam insulation is a ultra flexible product which is easily adaptable for wrap-around areas and varied surface types making it quick and easy to install.




BCA COMPLIANT
INSULBLUE foam insulation has been tested in accordance with relevant Australian standards giving confidence to builders and contractors for suitability in all applications.




TEAR RESISTANCE
With heavy duty foil and high density XPE foam core, INSULBLUE foam insulation is able to withstand high wind and has high tear resistance in extreme conditions.




FIBRE-FREE MATERIAL
Made from cross-linked closed cell XPE foam, INSULBLUE foam insulation is non-irritant to skin and non-allergenic making it easy for contractors to work with.




RESISTANT TO DELAMINATION
The poly woven reflective foils used in the manufacture of INSULBLUE foam insulation offer outstanding resistance to delamination over time ensuring excellent long term performance.



CLEAR CAVITY MAINTAINED
When INSULBLUE foam insulation is used in wall cavity applications such as double brick construction a clear cavity is still maintained making it easily accessible for services.



PROVEN TO PERFORM IN WA
Used widely in roofing, wall wrap and cavity applications across Western Australia, INSULBLUE foam insulation has been proven to withstand the harsh climate statewide.



WATER RESISTANT
The heavy duty facings and closed-cell material structure of INSULBLUE foam insulation means there is no product degradation over time caused by any event of moisture ingress.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Product Range



INSULBLUE
Foam Insulation



INSULBLUE
Cavity Spacers



INSULTAPE
Reinforced Foil Tape

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IFX413522	R0.10	INSULBLUE 4mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX613522	R0.17	INSULBLUE 6.5mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX813522	R0.20	INSULBLUE 8mm Foam Insulation, 1.35 x 22.25m	Stock	1 Roll
IFS813522	R0.20	INSULBLUE 8mm Vapour Barrier, 1.35 x 22.25m	Stock	1 Roll

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ICS6060	INSULBLUE 60 x 60 x 20mm Cavity Spacers, 50 Pack	Stock	1 Pack
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP7250	INSULTAPE 72mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll

Technical Data

TEST ITEM	STANDARD	RESULT
Thermal Conductivity	ASTM C518	0.04 W/mK
Flammability Index	AS 1530.2	<5
Spread of Flame Index	AS 1530.3	0
Smoke Developed Index	AS 1530.3	1
Strength / Duty	AS 4200.1	Heavy Duty
Emittance	AS 4201.5	0.03
Reflectivity	Actual	97%
Dry Delamination	AS 4201.1	Pass
Wet Delamination	AS 4201.2	Pass
Corrosion Resistance	AS 4859.1	Pass


FIRESPAN

Non-combustible Sarking


Description

FIRESPAN non-combustible wall wrap and sarking is a heavy duty membrane which is BCA compliant and Deemed-to-Satisfy non-combustible for use in exterior cladding systems on all types of construction. Tested in accordance with AS 1530.1 and AS 1530.3 fire standards, FIRESPAN is available in waterproof and perforated variations. The reflective foil face on one side provides extra R-value when installed facing an air cavity and FIRESPAN is classified as a barrier to radiant heat, moisture ingress, draughts and dust penetration when installed as per AS 4200.2.


Product Features




AS 1530.1 NON-COMBUSTIBLE
FIRESPAN sarking is Deemed-to-Satisfy non-combustible in accordance with NCC 2022 Clause C2D10(6)(f) and (g) meaning it can be used on any building of types A, B and C construction.




HIGH DURABILITY
FIRESPAN has an advanced strength non-combustible fibre-glass and pure aluminium foil structure meaning it offers excellent durability and resistance to delamination over time.




CSIRO FIRE TESTING
FIRESPAN has been appropriately tested to relevant Australian standards including AS 1530.1 and AS 1530.3 by NATA accredited CSIRO and is Deemed-to-Satisfy non-combustible.




NCC 2022 COMPLIANT
FIRESPAN sarking has been tested in accordance with relevant Australian fire standards including AS 1530.1, AS 1530.2 and AS 1530.3 giving confidence to builders and contractors for suitability on all projects.




EASY TO USE
FIRESPAN sarking is a high strength and ultra flexible product easily adaptable for wrap-around areas and varied surface types therefore quick and easy to install.



WATER RESISTANT
The heavy duty facing material structure of FIRESPAN sarking and wall wrap means there is no moisture ingress or break-down ensuring superior long term performance.



ANTI-TEAR STRENGTH
With ultra heavy duty foil and multi-layer woven construction, FIRESPAN sarking is able to withstand moderate wind and won't tear of the building when under pressure.



PROTECTS THE BUILDING
During construction FIRESPAN sarking will help protect the building frame from the external elements helping to prevent onset of any degradation or corrosion.

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
FSS12540	FIRESPAN Waterproof Membrane, 1.25 x 40m Roll	Stock	1 Roll
FSB12540	FIRESPAN Perforated Membrane, 1.25 x 40m Roll	Stock	1 Roll

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ITH6030	FIRESPAN 60mm High Tack Sarking Tape, 30m Roll	Stock	1 Roll

Technical Data

TEST ITEM	STANDARD	RESULT
Non-combustible (DtS)	AS 1530.1	Pass*
Ignitability Index	AS 1530.3	0*
Spread of Flame Index	AS 1530.3	0*
Heat Evolved Index	AS 1530.3	0*
Smoke Developed Index	AS 1530.3	1*
Flammability Index	AS 1530.2	1**
Strength / Duty	AS 4200.1	Heavy Duty
Emittance	AS 4201.5	0.05
Reflectivity	Actual	95%

*Deemed-to-Satisfy non-combustible in accordance with AS 1530.1 and AS 1530.3 testing as per the requirements of NCC 2022 clause C2D10(6)(g). **Also Deemed-to-Satisfy non-combustible as per NCC 2022 clause C2D10(6)(f), with thickness <1mm and Flammability Index <5.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.





FACADE SYSTEMS



78
STEEL FRAMING



82
ALUMINUM FRAMING



84
TRIMS & Z-ANGLES



86
FASTENERS



88
MEMBRANES



90
TAPES & GASKETS



92
ADHESIVES



94
SEALANTS



96
SPECIALIST TOOLS

FACADE SYSTEMS.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

STEEL FRAMING

Bicep Steel Facade System For Insulated Facades



Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
BCFEB70	BICEP FE 70mm Facade Bracket (77-110mm w/ Support Profile)	Stock	1 Bracket
BCFEB115	BICEP FE 115mm Facade Bracket (115-155mm w/ Support Profile)	Stock	1 Bracket
BCFEB***	BICEP FE 140-305mm Facade Brackets (140-345mm w/ Support Profile)	10-12 Wks	POA
BCFE6040	BICEP FE 60/40mm Hori/Vertical Support Profile, 6.0m Length	Stock	1 Length
BCTB6200	BICEP 6mm R.02 Thermal Break (To Suit BCB*** Brackets), 200 Pack	Stock	1 Pack
BCPP100	BICEP Universal Pressure Plate with 9mm Hole, 100 Pack	Stock	1 Pack

System Components

PAGE	DESCRIPTION	LEAD TIME	MOQ
64	IROCK Non-Combustible Facade & Cavity Insulation	Stock	1 Board

Studtek Facade System - 1.15BMT Zincalume Steel



Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SZ1203560	STUDTEK 120 x 35mm Zincalume Joint Top-hat, 6.0m (1.15bmt)	Stock	1 Length
SZ503560	STUDTEK 50 x 35mm Zincalume Top-hat, 6.0m Length (1.15bmt)	Stock	1 Length
SZA757560	STUDTEK 75 x 75mm Zincalume Angle, 6.0m Length (1.15bmt)	Stock	1 Length
SCC60	STUDTEK 35 x 35mm Black Cavity Closer, 6.0m Length (0.55bmt)	Stock	1 Length
SJS359	STUDTEK 67 x 3.5mm Black Backing Strip, 3.59m Length (0.48bmt)	Stock	1 Length
SJS299	STUDTEK 67 x 3.5mm Black Backing Strip, 2.99m Length (0.48bmt)	Stock	1 Length

System Components

PAGE	DESCRIPTION	LEAD TIME	MOQ
90	GASKETS - STUDTEK Foam Gaskets for Joint Top-hats	Stock	1 Roll

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



STEEL FRAMING

Studtek Cladding Top-Hats / Junction Stud



SG12035**
Joint Top-hat



SG75/50****
Standard Top-hat

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SG1203560	STUDTEK 120 x 35mm Joint Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG1203536	STUDTEK 120 x 35mm Joint Top-hat, 3.6m Length (1.10bmt)	Stock	1 Length
SG753560	STUDTEK 75 x 35mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG751560	STUDTEK 75 x 15mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG505060	STUDTEK 50 x 50mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG503560	STUDTEK 50 x 35mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG503536	STUDTEK 50 x 35mm Standard Top-hat, 3.6m Length (1.10bmt)	Stock	1 Length
SG502460	STUDTEK 50 x 24mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG501560	STUDTEK 50 x 15mm Standard Top-hat, 6.0m Length (1.10bmt)	Stock	1 Length
SG501536	STUDTEK 50 x 15mm Standard Top-hat, 3.6m Length (1.10bmt)	Stock	1 Length

Studtek C-Channel Framing



SG653060
C-Channel Framing

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SG653060	STUDTEK 65 x 30mm C-channel, 6.0m Length (1.10bmt)	Stock	1 Length

Studtek Top-Hat Purlins



SGT****
Top-hat Purlins

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SGT50**	STUDTEK 50mm Top-hat Purlin, Custom Lengths	1-2 Wks	100 Lengths
SGT6460	STUDTEK 64 x 34mm Purlin Roofing Top-hat, 6.0m Length (0.95bmt)	Stock	1 Length
SGT7560	STUDTEK 75 x 45mm Purlin Roofing Top-hat, 6.0m Length (0.95bmt)	Stock	1 Length
SGT96**	STUDTEK 96mm Top-hat Purlin, Custom Lengths	1-2 Wks	100 Lengths
SGT120**	STUDTEK 120mm Top-hat Purlin, Custom Lengths	1-2 Wks	100 Lengths

Studtek Angles




SZA/SGA****
Angles

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SZA757560	STUDTEK 75 x 75mm Zincalume Angle, 6.0m Length (1.15bmt)	Stock	1 Length
SGA505036	STUDTEK 50 x 50mm Angle, 3.6m Length (0.75bmt)	Stock	1 Length
SGA353536	STUDTEK 35 x 35mm Angle, 3.6m Length (0.75bmt)	Stock	1 Length
SGA252536	STUDTEK 25 x 25mm Angle, 3.6m Length (0.75bmt)	Stock	1 Length

ALUMINIUM FRAMING

Bicep Aluminium Facade System For Insulated Facades

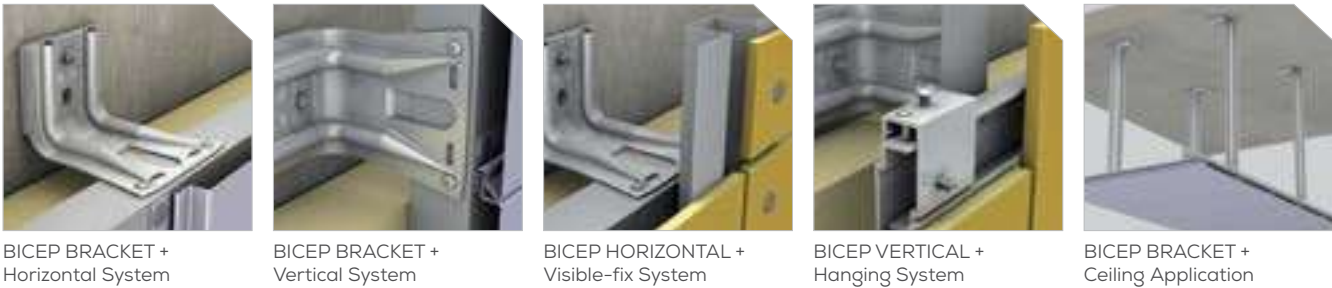

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
BCALB70	BICEP AL 70mm Facade Bracket (77-110mm w/ Support Profile)	Stock	1 Bracket
BCALB115	BICEP AL 115mm Facade Bracket (115-155mm w/ Support Profile)	Stock	1 Bracket
BCALB***	BICEP AL 140-305mm Facade Brackets (140-345mm w/ Support Profile)	10-12 Wks	POA
BCAL6040	BICEP AL 60/40mm Horizontal/Vertical Support Profile, 6.5m Length	Stock	1 Length
BCTB6200	BICEP 6mm R.02 Thermal Break (To Suit BCB*** Brackets), 200 Pack	Stock	1 Pack
BCPP100	BICEP Universal Pressure Plate with 9mm Hole, 100 Pack	Stock	1 Pack


Bicep Aluminium Carrier Rail & Hanger System



Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
BCALCR60	BICEP AL Carrier Rail (To Suit BCAL*H100), 6.0m Length	10-12 Weeks	1 Length
BCALAH100	BICEP AL TUF-S Adjustable Hanger, 100 Pack	10-12 Weeks	1 Pack
BCALSH100	BICEP AL TUF-S Static Hanger, 100 Pack	10-12 Weeks	1 Pack

Nvelope Aluminium Framing System

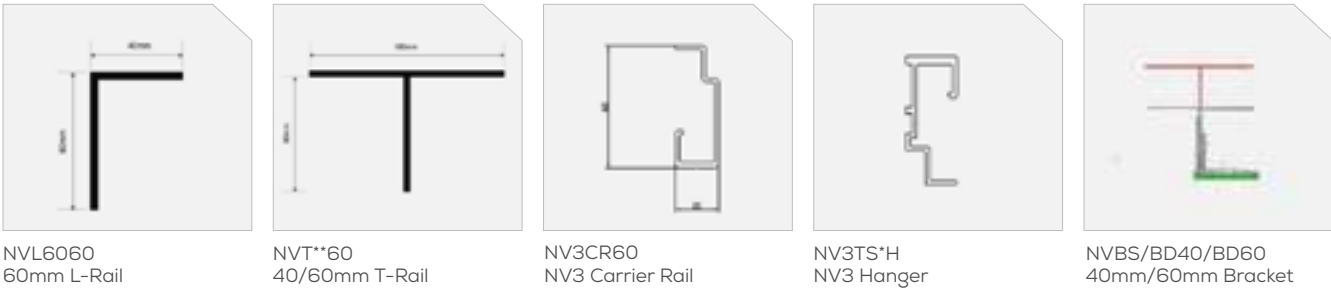

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
NVT4060	NVELOPE 40mm Vertical T-Rail, 6.0m Length	1-2 Weeks	1 Length
NVT6060	NVELOPE 60mm Vertical T-Rail, 6.0m Length	1-2 Weeks	1 Length
NVL6060	NVELOPE 60mm Vertical L-Rail, 6.0m Length	1-2 Weeks	1 Length
NV3CR60	NVELOPE NV3 Carrier Rail, 6.0m Length	1-2 Weeks	1 Length
NV3TSLH	NVELOPE NV3 TUF-S Leveling Hanger (Use with TS6CA**)	1-2 Weeks	1 Unit
NV3TSSH	NVELOPE NV3 TUF-S Static Hanger (Use with TS6CA**)	1-2 Weeks	1 Unit
NVBS40	NVELOPE 40mm Single Bracket (6.5/11mm holes)	1-2 Weeks	1 Unit
NVBD40	NVELOPE 40mm Double Bracket (11mm hole)	1-2 Weeks	1 Unit
NVBS60	NVELOPE 60mm Single Bracket (6.5/11mm holes)	1-2 Weeks	1 Unit
NVBD60	NVELOPE 60mm Double Bracket (11mm hole)	1-2 Weeks	1 Unit
NVS2055	NVELOPE 20mm x 5.5g Universal Fixing Screw, 500 Pack	1-2 Weeks	1 Pack

TUF-S Concealed Anchors




Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
TS6CA9	TUF-S 9mm D6 Concealed Anchor, 500 Pack	3-4 Weeks	1 Pack
TS6CA12	TUF-S 12mm D6 Concealed Anchor, 500 Pack	3-4 Weeks	1 Pack

TRIMS & Z-ANGLES


Cladtrim Colour-Matched Trim System

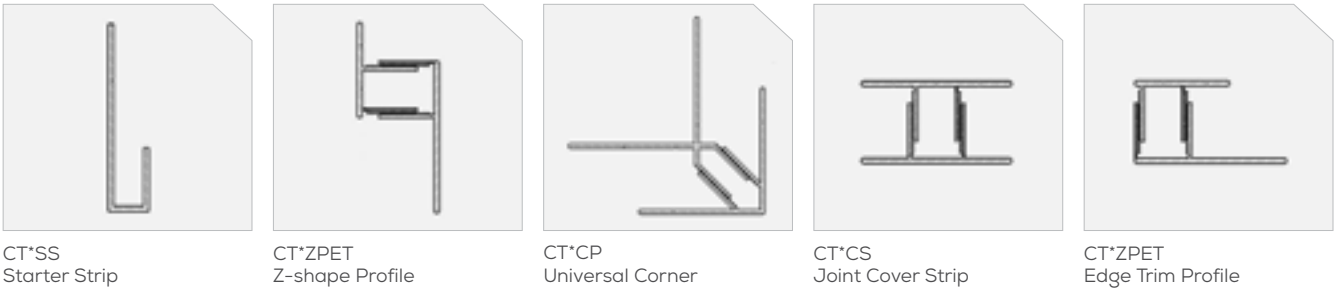

CODE	DESCRIPTION	LEAD TIME	MOQ
CT*SS	CLADTRIM J-shape Starter Strip (Insert Colour), 5.5m Length	2-3 Weeks	1 Length
CT*ZPET	CLADTRIM Z-shape Joint Profile (Insert Colour), 6.5m Length	2-3 Weeks	1 Length
CT*CP	CLADTRIM 40mm 2-piece Corner (Insert Colour), 5.5m Length	2-3 Weeks	1 Length
CT*CS	CLADTRIM 40mm 2-piece Cover Strip (Insert Colour), 5.5m Length	2-3 Weeks	1 Length
CT*ZPET	CLADTRIM 40mm 2-piece Edge Trim (Insert Colour), 5.5m Length	2-3 Weeks	1 Length
CT*5050	CLADTRIM 50 x 50mm Angle (Insert Colour), 6.5m Length	2-3 Weeks	1 Length
CT*4040	CLADTRIM 40 x 40mm Angle (Insert Colour), 6.5m Length	2-3 Weeks	1 Length
CT*4020	CLADTRIM 40 x 20mm Angle (Insert Colour), 5.8m Length	2-3 Weeks	1 Length
CT*2020	CLADTRIM 20 x 20mm Angle (Insert Colour), 5.8m Length	2-3 Weeks	1 Length

(*) The asterix in the code denotes the specified type of finish to be applied to the aluminium extrusion as follows; U = Ultrawood Timber Colours, A = Anodised Colours and P = Powdercoat Colours.

Cassette-Fix Z-Angles & Stiffener

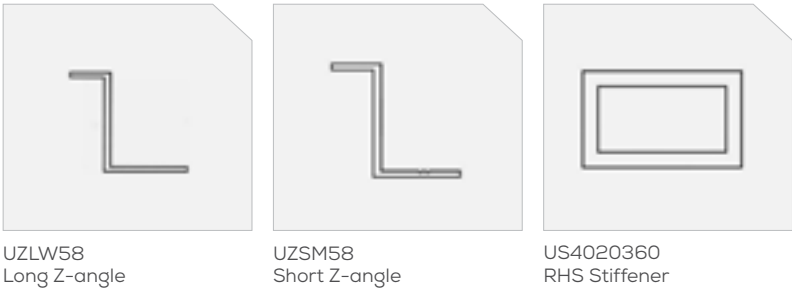

CODE	DESCRIPTION	LEAD TIME	MOQ
UZLW58	ULTRAZED 24mm Long Z-angle (White Finish), 5.8m Length	Stock	20 Lengths
UZSM58	ULTRAZED 22mm Short Z-angle (Mill Finish), 5.8m Length	Stock	20 Lengths
US4020360	ULTRASTIFF 40 x 20 x 3mm RHS Stiffener (Mill Finish), 5.8m Length	Stock	1 Length



FASTENERS



Colourfix Colour-Matched Fixings



CFR**
Coloured Rivet



CFFPS
Rivet Sleeve



CFM***
Coloured Screws

Colour-Matched Rivet System

CODE	DESCRIPTION	LEAD TIME	MOQ
CFR14	COLOURFIX 14mm D15 Rivet (Colour), 250 Pack	3-4 Weeks	1 Pack
CFR18	COLOURFIX 18mm D15 Rivet (Colour), 250 Pack	3-4 Weeks	1 Pack
CFFPS	COLOURFIX 10mm Fixed Point Rivet Sleeve, 200 Pack	3-4 Weeks	1 Pack

Colour-Matched Screws

CODE	DESCRIPTION	LEAD TIME	MOQ
CFM30	COLOURFIX 30mm Metal Screw (Colour), 250 Pack	3-4 Weeks	1 Pack
CFMW30	COLOURFIX 30mm Screw & Washer (Colour), 250 Pack	3-4 Weeks	1 Pack
CFM40X	COLOURFIX 40mm x 8g End Cap Screw (Colour), 100 Pack	3-4 Weeks	1 Pack

System Components

PAGE	DESCRIPTION	LEAD TIME	MOQ
97	COLOURFIX Specialist Tools	Stock	1 Tool

Standard Screws



GVHEX16
10-16 Hex Head



GVWFR**
10-16 Wafer Screw



GVCSK30
10-16 Countersunk



GVM308/408
30x8g Metal Screw



BHM/BHT***
Black Head Screw

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
GVHEX16	GALVANISED 16mm x 10-16 Hex Head, 1000 Pack	Stock	1 Pack
GVWFR22	GALVANISED 22mm x 10-16 Wafer Screw, 1000 Pack	Stock	1 Pack
GVWFR30	GALVANISED 30mm x 10-16 Wafer Screw, 1000 Pack	Stock	1 Pack
GVCSK30	GALVANISED 30mm x 10-16 Countersunk Screw, 1000 Pack	Stock	1 Pack
GVM308	GALVANISED 30mm x 8g Metal Screw, 200 Pack	Stock	1 Pack
GVM408	GALVANISED 40mm x 8g Metal Screw, 200 Pack	Stock	1 Pack
BHM427	BLACKHEAD 42mm x 7g Metal Screw, 200 Pack	Stock	1 Pack
BHT508	BLACKHEAD 50mm x 8g Timber Screw, 200 Pack	Stock	1 Pack

Horseshoe Packers



BP*****
Horseshoe Packers

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
BP10	BLUECHIP 75 x 1mm Packers, 4000 Pack	Stock	1 Pack
BP30	BLUECHIP 75 x 3mm Packers, 2000 Pack	Stock	1 Pack
BP50	BLUECHIP 75 x 5mm Packers, 1600 Pack	Stock	1 Pack
BP100	BLUECHIP 75 x 10mm Packers, 600 Pack	Stock	1 Pack



MEMBRANES

Insulark Wall Wrap



ISS13560
Waterproof Sarking




ISM15030
VPM Sarking

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
ISS13560	INSULSARK Waterproof Membrane, 1.35 x 60m Roll	Stock	1 Roll
ISM15030	INSULSARK Vapour Permeable Membrane, 1.5 x 30m Roll	Stock	1 Roll

Insulblue Foam Insulation



IF**13522
Foam Insulation



ICS6060
Cavity Spacers

Availability

CODE	R-VALUE	DESCRIPTION	LEAD TIME	MOQ
IFX413522	R0.10	INSULBLUE 4mm Cavity Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX613522	R0.17	INSULBLUE 6.5mm Cavity Insulation, 1.35 x 22.25m	Stock	1 Roll
IFX813522	R0.20	INSULBLUE 8mm Cavity Insulation, 1.35 x 22.25m	Stock	1 Roll
IFS813522	R0.20	INSULBLUE 8mm Vapour Barrier, 1.35 x 22.25m	Stock	1 Roll
ICS6060	NA	INSULBLUE 60 x 60 x 20mm Cavity Spacers, 50 Pack	Stock	1 Pack

Firespan and Proclima Non-Combustible Sarking



FSS/FSB12540
AS 1530.1 Sarking



PCM15036
Solitex Extasana

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
FSS12540	FIRESPAN Waterproof Membrane, 1.25 x 40m Roll	Stock	1 Roll
FSB12540	FIRESPAN Perforated Membrane, 1.25 x 40m Roll	Stock	1 Roll
PCM15036	PROCLIMA Solitex Extasana VPM, 1.5 x 36.5m Roll	Stock	1 Roll

Weather Defence Rigid Air Barrier



SWD2412
Rigid Air Barrier



SWDS60
Fireblock XT Sealant



SWDM38/T42
Specialist Screws

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SWD2412	WEATHER DEFENCE 13mm Rigid Air Barrier, 2400 x 1200mm	Stock	1 Sheet
SWDS60	WEATHER DEFENCE Fireblock XT Sealant, 600ml Sausage	Stock	20 Sausages
SWDM38	WEATHER DEFENCE 38mm Metal Screw, 1000 Pack	Stock	1 Pack
SWDT42	WEATHER DEFENCE 42mm Timber Screw, 1000 Pack	Stock	1 Pack

TAPES & GASKETS

Studtek Adhesive Foam Gaskets



TFG4048/32
Vertical Joint Gaskets



JOINT GASKET
Applied to Top-hat



TFG1232
Intermediate Gasket

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
TFG4048	STUDTEK 40 x 4.8mm EPDM Vertical Joint Gasket, 15m Roll	Stock	1 Roll
TFG4032	STUDTEK 40 x 3.2mm EPDM Vertical Joint Gasket, 25m Roll	Stock	1 Roll
TFG1232	STUDTEK 12 x 3.2mm EPDM Intermediate Gasket, 25m Roll	Stock	1 Roll

Tesa Double-Sided Tape System



TT707815
15mm Panel Tape



TT704412
12mm Stiffener Tape



TT60040
Industry Cleaner



TT60150
Adhesion Promoter

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
TT707815	BLUECHIP 7078 ACXplus 15mm Panel Tape, 18m Roll	Stock	1 Roll
TT704412	BLUECHIP 7044 ACXplus 12mm Stiffener Tape, 25m Roll	Stock	1 Roll
TT60040	BLUECHIP Tesa Industry Cleaner, 500ml Can	Stock	1 Can
TT60150	BLUECHIP Tesa Adhesion Promoter, 100ml Can	Stock	1 Can

Insultape Specialist Tapes



ITW4850
White High Tack Tape



ITP48/72/9650
Reinforced Foil Tape

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
ITW4850	INSULTAPE 48mm White High Tack Tape, 50m Roll	Stock	1 Roll
ITP4850	INSULTAPE 48mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP7250	INSULTAPE 72mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll
ITP9650	INSULTAPE 96mm Reinforced Foil Tape, 50m Roll	Stock	1 Roll

Proclima & Weather Defence Tape



PCT3830
Adhiso Sealant Tape



PCT6030
Extora Joint Tape



PCT100/150
Flashing / Sill Tape

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
PCT3830	PROCLIMA 38mm Tescon Adhiso Sealant Tape, 30m Roll	Stock	1 Roll
PCT6030	PROCLIMA 60mm Tescon Extora Joint Tape, 30m Roll	Stock	1 Roll
PCT10030	PROCLIMA 100mm Tescon Extora Flashing Tape, 30m Roll	Stock	1 Roll
PCT15020	PROCLIMA 150mm Tescon Extoseal Sill Tape, 20m Roll	Stock	1 Roll

ADHESIVES

SikaTack Adhesive System



SKP50/20/1060
SikaTack Panel



SKTP
SikaTack Panel Tape



SKA100100
SikaTack Aktivator



SKP206/215100
SikaTack Primers



SKPCA
Foam Cleaning Pads

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SKP5060	BLUECHIP SikaTack Panel-50 Adhesive, 600ml Sausage	10-12 Weeks	200 Sausages
SKP2060	BLUECHIP SikaTack Panel-20 Adhesive, 600ml Sausage	Stock	20 Sausages
SKP1060	BLUECHIP SikaTack Panel-10 Adhesive, 600ml Sausage	Stock	20 Sausages
SKPT	BLUECHIP SikaTack 12 x 3.3mm Panel Tape, 33m Roll	Stock	1 Roll
SKA100100	BLUECHIP SikaTack Aktivator 100, 1 Litre	Stock	1 Can
SKP206100	BLUECHIP SikaTack Primer 206 G&P, 1 Litre	Stock	1 Can
SKP215100	BLUECHIP SikaTack Primer 215, 1Litre	Stock	1 Can
SKPCA	BLUECHIP Sika Foam Cleaning Pads, 168 Pack	Stock	1 Pack

Sikaflex 11FC Adhesive




SK11FC*60
600ml Sausage



SIKAFLEX 11FC
20 Sausage Box

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SK11FCB60	BLUECHIP Sikaflex 11FC Black, 600ml Sausage	Stock	20 Sausages
SK11FCW60	BLUECHIP Sikaflex 11FC White, 600ml Sausage	Stock	20 Sausages
SK11FCG60	BLUECHIP Sikaflex 11FC Grey, 600ml Sausage	Stock	20 Sausages

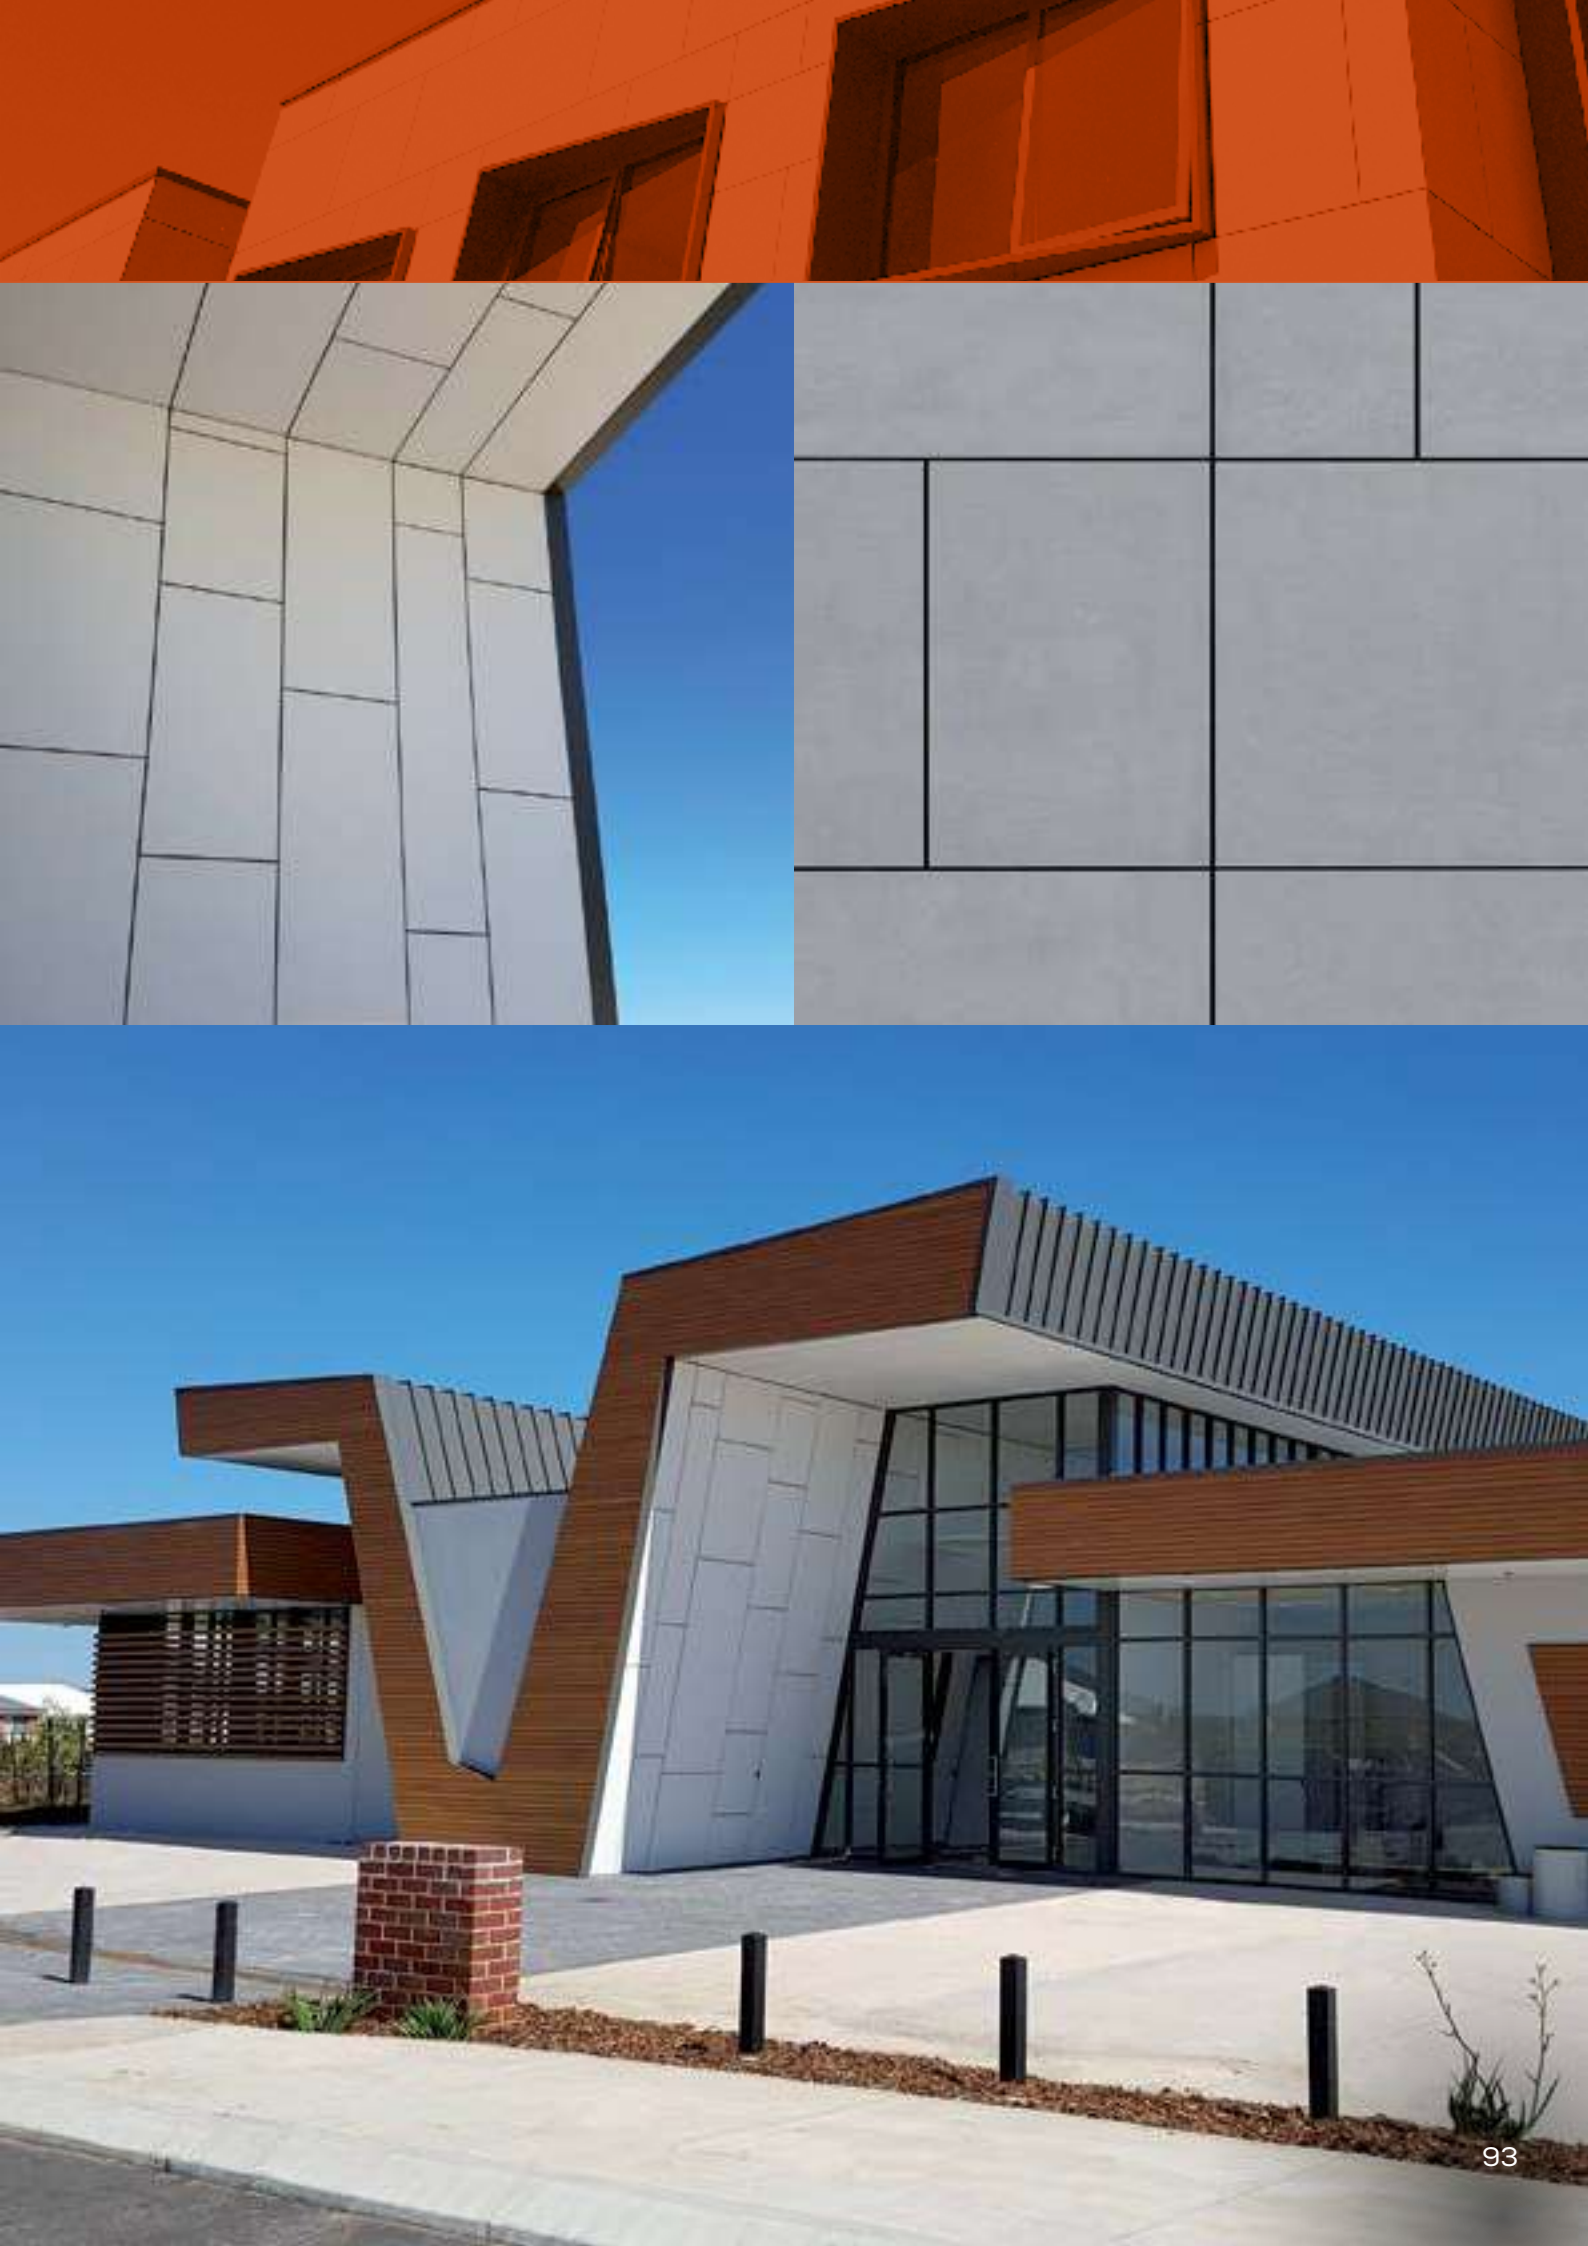

SEALANTS

Prolastik NC Silicone Sealant



PKNC*60
NC Silicon Sealant



PKNC*60
20 x 600ml Sausages



PKNCB60
Matt Black



PKNCG60
Matt Grey



PKNCW60
Matt White

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
PKNCB60	PROLASTIK NC Silicone Matt Black, 600ml Sausage	Stock	20 Sausages
PKNCG60	PROLASTIK NC Silicone Matt Grey, 600ml Sausage	Stock	20 Sausages
PKNCW60	PROLASTIK NC Silicone Matt White, 600ml Sausage	Stock	20 Sausages

Prosil 41 Silicone Sealant



PS41*60
LM Silicon Sealant



PS41*60
LM Silicon Sealant



PS41B60
Matt Black



PS41G60
Matt Grey



PS41W60
Matt White

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
PS41B60	BLUECHIP Prosil 41 Matt Black, 600ml Sausage	Stock	20 Sausages
PS41G60	BLUECHIP Prosil 41 Matt Grey, 600ml Sausage	Stock	20 Sausages
PS41W60	BLUECHIP Prosil 41 Matt White, 600ml Sausage	Stock	20 Sausages

Sikaflex PRO Polyurethane Sealant



SKPR*60
Polyurethane Sealant



SKPR*60
20 x 600ml Sausages



SKPRB60
Black



SKPRD60
Dark Grey



SKPRC60
Concrete Grey



SKPRO60
Off White



SKPRW60
White

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SKPRB60	BLUECHIP Sikaflex PRO Black, 600ml Sausage	Stock	20 Sausages
SKPRD60	BLUECHIP Sikaflex PRO Dark Grey, 600ml Sausage	Stock	20 Sausages
SKPRC60	BLUECHIP Sikaflex PRO Concrete Grey, 600ml Sausage	Stock	20 Sausages
SKPRO60	BLUECHIP Sikaflex PRO Off White, 600ml Sausage	Stock	20 Sausages
SKPRW60	BLUECHIP Sikaflex PRO White, 600ml Sausage	Stock	20 Sausages

Bluechip Foam Backing Rod



BBR016
Foam Backing Rod



BBR016
150 Metre Roll

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
BBR016	BLUECHIP 16mm Open Cell Backing Rod, 150m Roll	Stock	1 Roll

SPECIALIST TOOLS

TUF-S Tools



TS6DB9/12
9mm/12mm Drill Bit



TSUDL
Depth Locator

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
TS6DB9	TUF-S Drill Bit for 9mm D6 Anchor (Use with TSUDL)	Stock	1 Bit
TS6DB12	TUF-S Drill Bit for 12mm D6 Anchor (Use with TSUDL)	Stock	1 Bit
TSUDL	TUF-S Universal Depth Locator Tool (Use with TS6DB*)	Stock	1 Bit

Equitone Tools



EQCB
Diamond Saw Blade



EQDB7/11
7mm/11mm Drill Bit



EQLDT
11mm Lines Drill Bit



EQUCT
Centralising Tool



EQLAK
Luko Applicator Kit

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
EQCB	EQUITONE 160mm Cutting Blade	Stock	1 Blade
EQDB11	EQUITONE 11mm Rivet Fix Drill Bit	Stock	1 Bit
EQLDT	EQUITONE 11mm Lines Drill-mill Tool	Stock	1 Bit
EQDB7	EQUITONE 7mm Screw Fix Drill Bit	Stock	1 Bit
EQDB4	EQUITONE 4.1mm Replacement Bit (To Suit EQUCT)	Stock	1 Bit
EQUCT	EQUITONE Uni Rivet Centralising Toll	Stock	1 Tool
EQUNP	EQUITONE Uni Rivet Protection Nose Piece	Stock	1 Piece
EQLAK	LUKO Applicator Kit (To Suit Edge Sealant)	Stock	1 Kit

Colourfix Tools



CFDB10
10mm Drill Bit



CFDB51
Replacement Bit



CFCT10
Centralising Tool

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
CFDB10	COLOURFIX 10mm Rivet Fix Drill Bit	3-4 Weeks	1 Bit
CFDB51	COLOURFIX 5.1mm Replacement Bit (To Suit CFCT10)	3-4 Weeks	1 Bit
CFCT10	COLOURFIX 10mm Centralising Tool	3-4 Weeks	1 Tool

Bluechip Tools



SBCSK
Countersinking Tool



GPA/GPPBRG
Accubird & Powerbird

Availability

CODE	DESCRIPTION	LEAD TIME	MOQ
SBCSK	BLUECHIP Smartbit CFC Countersinking Tool	Stock	1 Bit
GPABRG	BLUECHIP Gesipa Accubird Rivet Gun Kit	Stock	1 Kit
GPPBRG	BLUECHIP Gesipa Powerbird Rivet Gun Kit	Stock	1 Kit

SERVICE CHARGES

Delivery, Surcharges & Miscellaneous

Delivery & Handling Charges

CODE	DESCRIPTION	\$/EACH
BCUTE	DELIVERY Perth Metropolitan Ute (Per Drop)	\$80.00
BCTRUCK	DELIVERY Perth Metropolitan Truck No Crane (Per Drop)	\$210.00
BCHIAB	DELIVERY Perth Metropolitan Hiab with Crane (Per Drop)	\$250.00
BCMETTIM	DELIVERY Metal / Timber Products to all Mainland Capitals (Fork Unload)	2%
BCNATDCK	DELIVERY Natural / Decking Products to all Mainland Capitals (Fork Unload)	4%
BCINS	DELIVERY Insulation Products to all Mainland Capitals (Fork Unload)	10%
BCFREIGHT	DELIVERY Tasmania, Crane Trucks & Outside Mainland Capitals	POA
BCPALLET	PALLET CHARGE Credit for Pallets Returned in Good Order	\$90.00

Surcharge & Fees

CODE	DESCRIPTION	\$/EACH
BCCCS0.3	SURCHARGE 0.3% Debit Card Transaction Fee	0.3%
BCCCS1.2	SURCHARGE 1.2% Credit Card Transaction Fee	1.2%
BCCCSAMEX	SURCHARGE 1.95% Amex Credit Card Transaction Fee	1.95%
BGRESTOCK	RESTOCKING FEE 20% handling Fee (Stock Product Only)	20%

Miscellaneous Codes

CODE	DESCRIPTION
BCDEPOSIT	DEPOSIT 30% Required for Non-stock Products and Custom Orders
BCDISCLAIM	DISCLAIMER All Materials Supplied to any Project will be Invoiced at Quoted Rates

Architectural Products – Indicative Budget Rates Only

BRAND	DESCRIPTION	SYSTEM COST	SUPPLY & INSTALL
ULTRACORE IQ	Stock Colours	\$120/m ²	\$340/m ²
ULTRACORE IQ	Non-stock, BCG & Custom Colours	\$140/m ²	\$360/m ²
ULTRACORE IQ	Matt, Sparkling, Chromatic & Imitation Colours	\$160/m ²	\$380/m ²
ULTRABOND FR	Stock Colours	\$100/m ²	\$300/m ²
ULTRABOND FR	Non-stock, BCG & Custom Colours	\$120/m ²	\$320/m ²
ULTRABOND FR	Natural Zinc, Copper & Stainless Steel	\$150/m ²	\$350/m ²
ULTRASURE	Standard, Non-stock, BCG & Custom Colours	\$160/m ²	\$450/m ²
ULTRASURE	Metal Imitation Finishes	\$160/m ²	\$450/m ²
ULTRANAMEL	All Colours	\$440/m ²	\$540/m ²
ULTRALIGN	Anodised Colours	\$200/m ²	\$330/m ²
ULTRALIGN	Material Colours	\$230/m ²	\$360/m ²
ULTRALIGN	Standard Powdercoat Colours	\$200/m ²	\$330/m ²
EQUITONE	Tectiva Colours	\$180/m ²	\$360/m ²
EQUITONE	Natura Colours	\$180/m ²	\$360/m ²
EQUITONE	Lines Colours	\$300/m ²	\$500/m ²
EQUITONE	Lunara Colours	\$250/m ²	\$450/m ²
EQUITONE	Pictura Colours	\$200/m ²	\$400/m ²
NATURION	All Colours	\$180/m ²	\$360/m ²
ULTRAWOOD	Timber Colours	\$220/m ²	\$350/m ²
FUNDERMAX	All Colours (Excluding Below)	\$160/m ²	\$340/m ²
FUNDERMAX	Authentic Timber Finish	\$160/m ²	\$340/m ²
FUNDERMAX	Individual Decor	\$160/m ²	\$340/m ²
TRAXION	All Colours	\$260/m ²	\$360/m ²

Due to the large number of variations and/or applications for all the above products the above pricing is indicative only and may not be applicable to all finishes. Please contact our sales team for project specific quotations for all the above products to confirm accurate pricing, lead times and project specific system discounts that may apply.





We've Got It Covered



V0922



Blue Chip Group Pty Ltd

SYDNEY | MELBOURNE | BRISBANE | PERTH

P 1300 945 123

E sales@bluechipgroup.net.au

www.bluechipgroup.net.au

DISCLAIMER No information or advice contained in this publication is binding in any way shape or form and is provided on a without prejudice basis. All photographs and colour swatches are indicative only. All dimensions are nominal and all product data and specifications are subject to change without notice. All pricing, sales, communications and transactions are subject to Blue Chip Group's terms of trading which are available on request.