



BLUECHIP

Natural Cladding




Natural Cladding



www.bluechipgroup.net.au



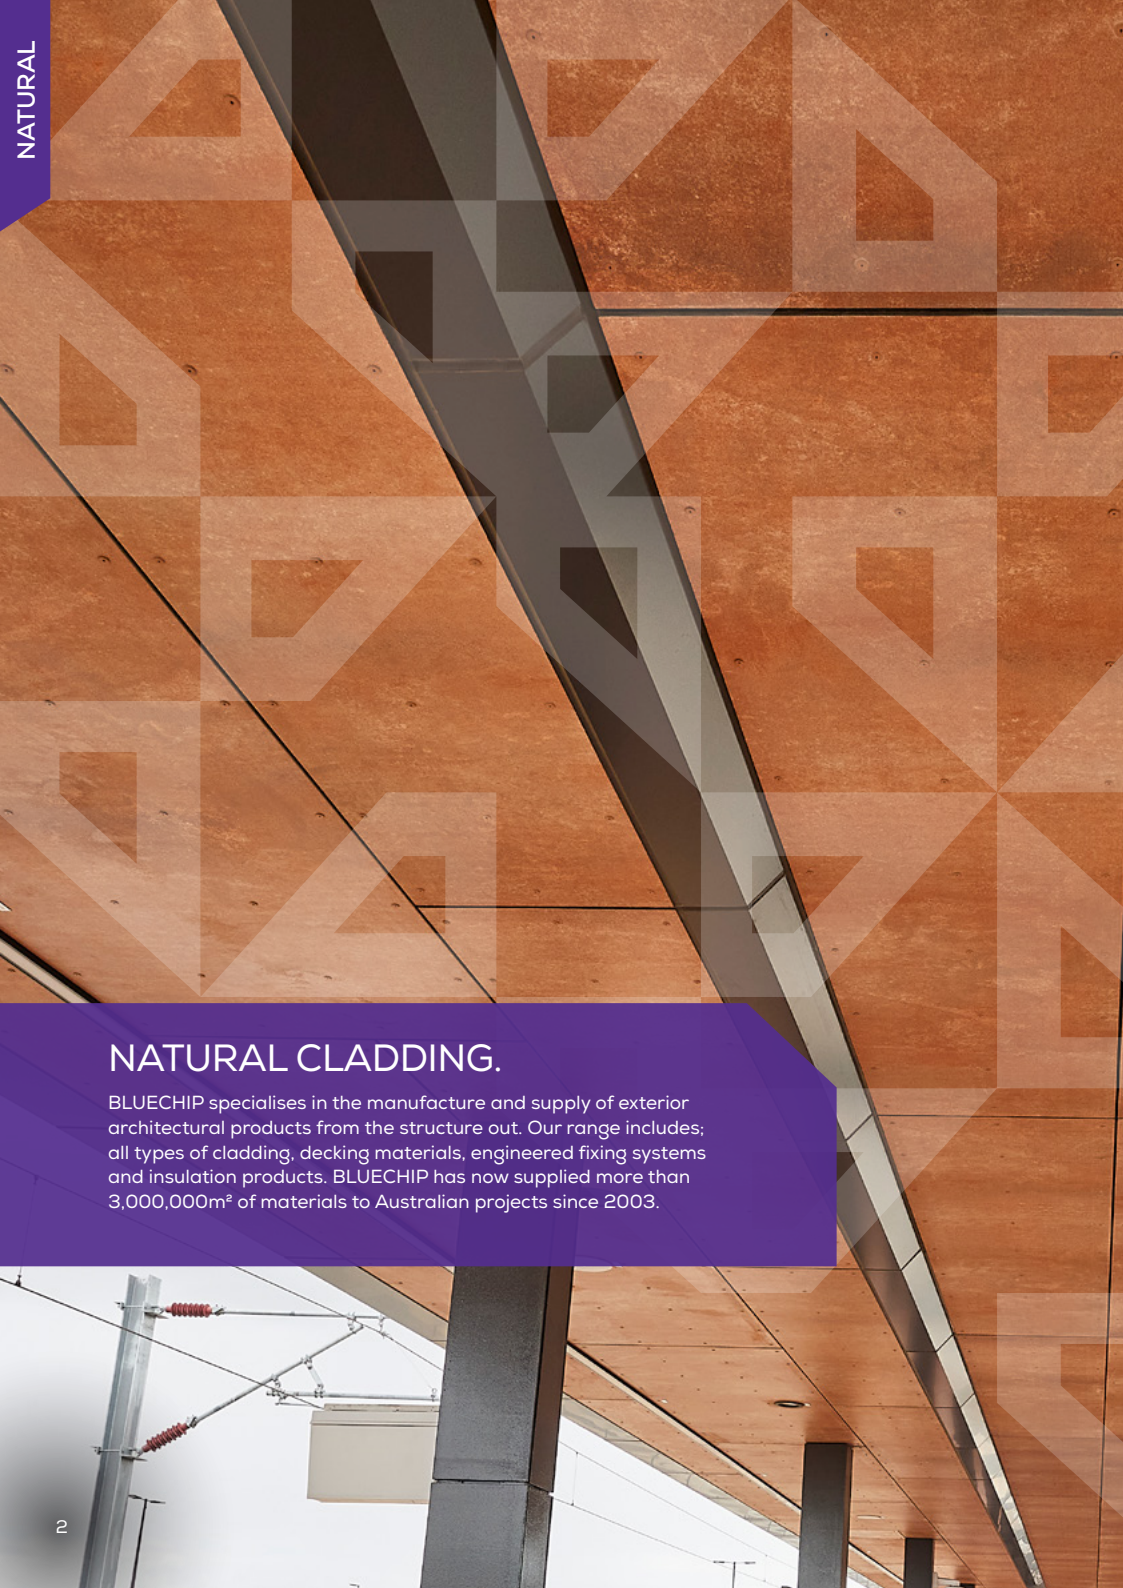

NATURAL CLADDING.

BLUECHIP specialises in the manufacture and supply of exterior architectural products from the structure out. Our range includes; all types of cladding, decking materials, engineered fixing systems and insulation products. BLUECHIP has now supplied more than 3,000,000m² of materials to Australian projects since 2003.

NATURAL CLADDING



4

EQUITONE

Through-colour
Fibre Cement Panel



10

NATURION

Non-combustible
Natural-finish Panel



14

EXERAMIC

Ceramic Tile
Facade System









EQUITONE

Through-colour Fibre Cement Panel

Description

EQUITONE is a through-coloured fibre cement cladding designed by and for architects. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material. Fibre cement is a cement composite material that consists of cement, cellulose and mineral materials, reinforced by a visible matrix. Nothing else. Visible and invisible fixing methods include riveting, screwing and bonding on metal or wood supporting frames. No matter what design options you explore, the through-coloured nature of EQUITONE assures crisp, monolithic details in a wide range of unique finishes.

Product Benefits

 <p>THROUGH-COLOUR MATERIAL EQUITONE through-colour fibre cement cladding offers elegant shades of natural colour. Every EQUITONE panel is unique, showing the raw, untreated texture of the fibre cement base material.</p>	 <p>NON-COMBUSTIBLE EQUITONE through-colour fibre cement cladding is a non-combustible facade material that can be used internally or externally wherever a non-combustible material is required.</p>
 <p>EASY TO CUT & INSTALL EQUITONE through-colour fibre cement cladding is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.</p>	 <p>LOCAL STOCK AVAILABLE EQUITONE through-colour fibre cement cladding is readily available with over 10 colours in stock Australia wide. Please contact us to confirm the stock range and current available sheet sizes.</p>
 <p>REPELS WATER EQUITONE tectiva panels receive a hydro-phobation process which prevents moisture ingress into the core of the panel. This allows the completely raw panel to be exposed to the elements without any treatment.</p>	 <p>MAINTENANCE FREE EQUITONE through-colour fibre cement cladding is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.</p>
 <p>HIGH DURABILITY EQUITONE through-colour fibre cement cladding is an exceptionally durable panel. Even in the most demanding applications EQUITONE has a structural life expectancy exceeding 50 years.</p>	 <p>VENTILATED SYSTEM EQUITONE cladding is installed on a ventilated sub-construction system allowing for the building envelope to breathe which increases thermal and energy efficiency and promotes healthier buildings.</p>

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Product Range




EQUITONE
Tectiva Finish



EQUITONE
Natura Finish



EQUITONE
Lines Finish



EQUITONE
Lunara Finish



EQUITONE
Pictura Finish

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
EQUITONE Tectiva TE90, TE10, TE20	2500, 3050 x 1220mm	Stock	1 Sheet
EQUITONE Tectiva TE00, TE15, TE60	2500, 3050 x 1220mm	2-3 Weeks	1 Sheet
EQUITONE Tectiva TE30, TE40	2500, 3050 x 1220mm	14-16 Weeks	40 Sheets
EQUITONE Natura N154, N161, N991, N593, N412, N252, N250, N251, N074	2500, 3100 x 1250mm	2-3 Weeks	1 Sheet
EQUITONE Natura All Other Colours	2500, 3100 x 1250mm	14-16 Weeks	30 Sheets
EQUITONE Lines	2500, 3050 x 1220mm	2-3 Weeks	1 Sheet
EQUITONE Lunara	2500, 3050 x 1220mm	14-16 Weeks	30 Sheets
EQUITONE Pictura	2500, 3100 x 1250mm	14-16 Weeks	30 Sheets

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
EQR***	EQUITONE Uni Rivet (Insert Colour), 250 Pack	Stock	1 Pack
EQUFPS	EQUITONE Uni Rivet Fixed Point Sleeve, 100 Pack	Stock	1 Pack
EQUITS***	EQUITONE Uni Timber Screw (Insert Colour), 250 Pack	3-4 Weeks	1 Pack
EQUSS	EQUITONE Uni Screw Sleeve, 250 Pack	3-4 Weeks	1 Pack
EQLUK10	LUKO 1 Litre Edge Sealer (Natura Only)	Stock	1 Can

System Components




Facade System



AS 1530.1 Insulation



Class 4 Membrane



Steel Top-hats




Joint Sealant

EQUITONE

Colour Chart

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

Equitone Tectiva



TE90
White (s)

TE00
Calico (s)

TE10
Natural (s)

TE60
Hessian (s)

TE15
Concrete (s)

TE20
Raw Grey (s)

TE30
Sandstorm

TE40
Sahara



TE85
Graphite

Equitone Natura



N164
White

N162
Chalk Grey

N154
Cream White


N861
Tawny Hue

N961
Ecu

N161
Pale Mist

N163
Soft Grey

N211
Classic Grey



N252
Ash Grey



N891
Beach Stone




N892
Fossil Grey



N250
Natural Grey



N294
Portland



N281
Nimbus




N251
Anthracite




N073
Charcoal



N074
Obsidian

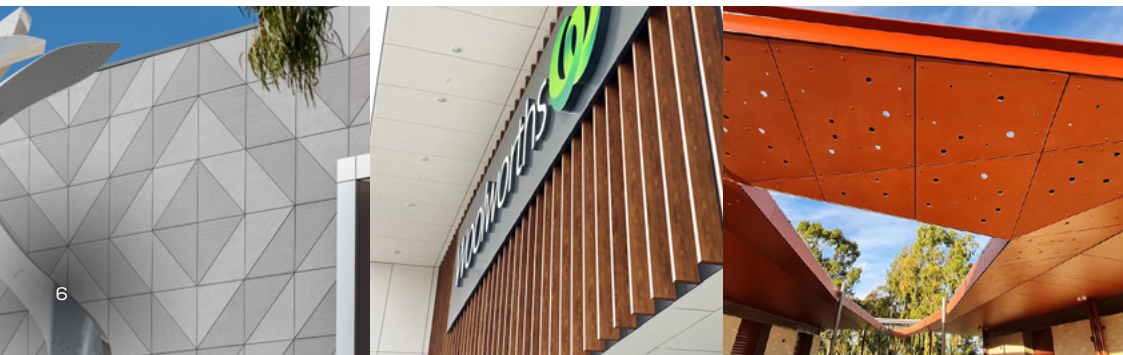

Equitone Natura (Special Colours)



N661
Muted Yellow

N662
Summer Haze

N593
Green Mist


N594
Jadeite Green

N411
Sea Mist

N412
Blue Grey

N991
Autumn Dusk


N972
Sepia



N331
Agate Red

N359
Ruby

Equitone Lines



LT00
Cream White

LT10
Beige

LT15
Light Grey

LT20
Raw Grey


LT30
Ochre Yellow

LT40
Red

LT60
Hessian

LT90
White

Equitone Lunara



LA60
Hessian

LA20
Raw Grey




EQUITONE

Colour Chart

Equitone Pictura



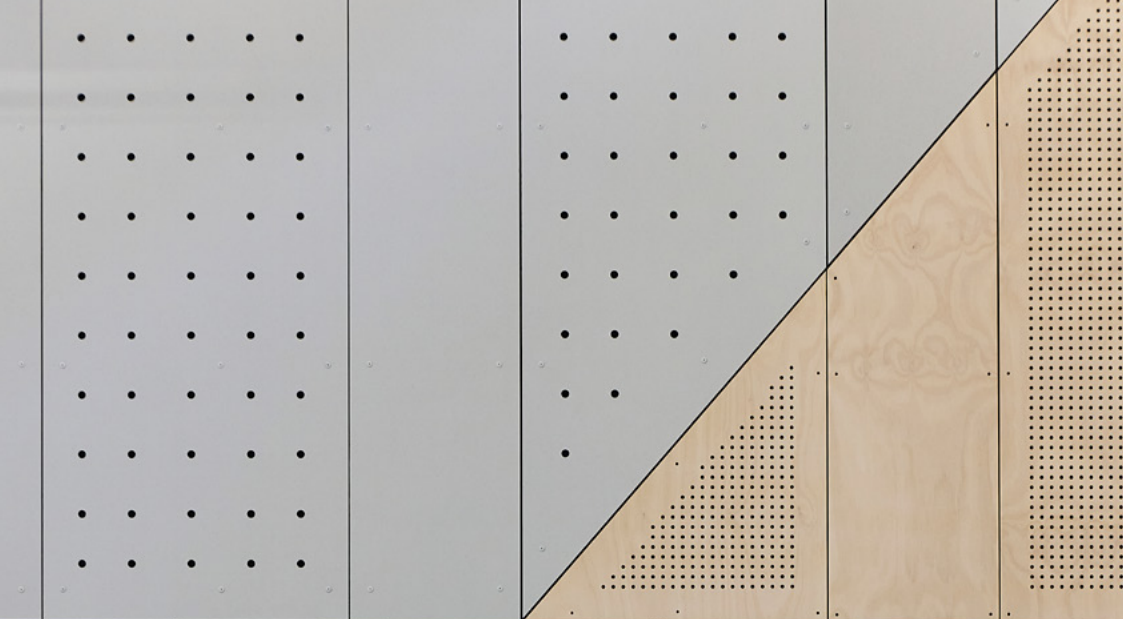

NATURION

Non-combustible Natural Finish Panel

Description

NATURION non-combustible natural-finish panel is a revolutionary and innovative new facade material developed with architects and designers in mind. Due to Australia's strict fire compliance standards, it has become increasingly difficult to use natural timber cladding panels whilst meeting non-combustibility requirements. NATURION solves this problem by providing the rich natural warmth of timber, stone and rusted metal panels while at the same time being; light-weight, highly durable, prefinished and most importantly deemed-to-satisfy non-combustible in accordance with NCC 2022, Clause C2D10(6)(d).

Product Benefits



NON-COMBUSTIBLE

Unlike almost all other timber looking panels such as plywood and high pressure laminate, NATURION natural-finish panels are deemed-to-satisfy non-combustible in accordance with NCC 2022, Clause C2D10(6)(d).



HIGH DURABILITY

NATURION non-combustible natural-finish panel is a highly durable material offering exceptional impact, abrasion and graffiti resistance and making it ideal for both public and private sector projects.



GROUP 1 RATING

Being deemed-to-satisfy non-combustible, NATURION achieves the equivalent or better than a group 1 fire rating making it the preferred choice for timber-look panels inside many public buildings.



ENVIRONMENTALLY FRIENDLY

Manufactured in Europe to strict environmental standards, NATURION has an A1+ classification for volatile substance emissions and is made of organic natural materials for long-term sustainability.



EASY TO CUT & INSTALL

NATURION non-combustible natural-finish panel is easily cut to size and installed onsite minimising lengthy lead times between site measure, production and delivery of pre-finished panels.



MAINTENANCE FREE

NATURION non-combustible natural-finish panel is a truly maintenance free material with no re-sealing, painting or ongoing maintenance ever required during install or anytime thereafter.



AUTHENTIC AESTHETICS

Available in an inspiring range of natural timber, stone and rusted metal finishes, NATURION offers beautiful natural aesthetics without compromising on durability, low maintenance or fire compliance.



PROPRIETARY SYSTEM

NATURION non-combustible natural-finish panel is installed on a proprietary ventilated sub-frame facade system using either visible colour-matched fasteners or a concealed secret-fix system.

INSTALL & TECHNICAL


For installation and technical information, scan the QR code and view 'Downloads' tab.




Product Range



NATURION
Timber Decors



NATURION
Material Decors



NATURION
Stone Decors

Availability

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
NATURION 8mm Timber Decor Boards	2500, 3200 x 1200mm	14-16 Weeks	300m ²
NATURION 8mm Material Decor Boards	2500, 3200 x 1200mm	14-16 Weeks	300m ²
NATURION 8mm Stone Decor Boards	2500, 3200 x 1200mm	14-16 Weeks	300m ²
NATURION 8mm Timber Decor Planks	3200 x 240mm	14-16 Weeks	300m ²
NATURION 8mm Material Decor Planks	3200 x 240mm	14-16 Weeks	300m ²
NATURION 8mm Stone Decor Planks	3200 x 240mm	14-16 Weeks	300m ²

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
CFR18	EUROFIX 18mm D15 Rivet (Insert Colour), 250 Pack	3-4 Weeks	1 Box
CFFPS	EUROFIX 10mm Fixed Point Rivet Sleeve, 100 Pack	3-4 Weeks	1 Box
CFDB10	EUROFIX 10mm Rivet Fix Drill Bit (To Drill Panel)	Stock	1 Bit
CFCT10	EUROFIX 10mm Centralising Tool (To Drill Framing)	Stock	1 Bit
CFDB51	EUROFIX 5.1mm Replacement Bit (To Suit CFCT10)	Stock	1 Bit
EQLUK10	LUKO 1 Litre Edge Sealer (apply to cut edges)	Stock	1 Can

System Components




Facade System



AS 1530.1 Insulation



Class 4 Membrane



Steel Top-hats



Joint Sealant

NATURION

Colour Chart

Timber Decors




NTT127 Weathered Oak NTT507 Bleached Oak NTT461 Fijian Teak NTT102 Burmese Teak NTT191 Sherwood Oak NTT125 Vintage Oak NTT126 Smoked Oak NTT124 Burnt Oak

Material Decors



NTM211 Uluru Oxide NTM161 Pilbara Oxide NTM454 Streaky Oxide NTM020 Fortescue Oxide NTM426B Raw Tilt Panel NTM020B Smoky Oxide NTM031 Moonlight Stucco NTM029 Smoky Stucco



NTM020A Thunder Oxide NTM028 Thunder Stucco NTM318 Graphite Stucco NTM318A Carbon Stucco

Stone Decors



NTS007 Cool Travertine NTS006 Warm Travertine NTS004 Roman Travertine NTS019 Kalbarri Sandstone





EXERAMIC

Ceramic Tile Facade System

Description

The EXERAMIC facade system comprises a high-tech extruded ceramic tile installed using the proprietary BICEP bracketry system. The EXERAMIC facade system can also be installed as an insulated system using our IROCK non-combustible insulation for high-end projects, decreasing energy costs and CO₂ emissions at the same time. The EXERAMIC facade system offers extreme performance against the elements and is fast to install, economical and environmentally friendly. Available in a wide variety of natural finishes including terracotta, stone, cement, marble and timber finishes, EXERAMIC is an exceptional façade solution.

Product Benefits



EXTREME DURABILITY

EXERAMIC ceramic facade tiles are tested to ISO 10545-4 and they easily achieve double the standard breaking strength of $\geq 3,000$ N. In fact, EXERAMIC ceramic facade tiles are able to withstand a huge $\geq 6,000$ N.



ECO-FRIENDLY CIRCULAR ECONOMY

Heavily focused on the circular economy, the EXERAMIC manufacturing process recovers 100% of the residual material generated during the production process, reintroducing approximately 40% of recycled content into the raw material.



PRECISION MANUFACTURING

Manufactured according to ISO 10545-2, the high-precision extrusion technology used for EXERAMIC ceramic facade tiles means they are rectified on all 4 sides, reducing tolerances to a minimum and ensuring precision installation.



NATURALLY FOREVER

Enriching new and refurbished buildings, EXERAMIC ceramic facade tiles impart an exclusive contemporary character to all projects. They are elegant, natural and look virtually unchanged over an independently declared service life of 50+ years.



NON-COMBUSTIBLE

As expected, EXERAMIC ceramic facade tiles are a deemed-to-satisfy non-combustible facade material in accordance with NCC 2022 clause C2D10(5)(i) meaning they can be used internally or externally wherever a non-combustible material is required.



TECHNICAL SUPPORT

Advanced project support is available to assist with engineering and full facade details for the EXERAMIC system from basic ventilated systems to complete insulated and ventilated facades. Please get in touch to discuss your project in further detail.



EPD VERIFIED FOR PERFORMANCE

EXERAMIC ceramic facade tiles are eco-sustainable and are a 100% recyclable building material. EXERAMIC ceramic facade tiles have been EPD verified to enable use in the most environmentally sensitive construction projects.



VENTILATED & INSULATED SYSTEM

EXERAMIC ceramic facade tiles are installed on the BICEP bracketry system allowing for a ventilated and/or insulated system with varying cavity depths for different insulation thicknesses. Improve your project's thermal and energy efficiency by R3.33.

INSTALL & TECHNICAL

For installation and technical information, scan the QR code and view 'Downloads' tab.



Product Range



EXERAMIC
Terracotta Finish



EXERAMIC
Stone Finish



EXERAMIC
Cement Finish



EXERAMIC
Marble Finish



EXERAMIC
Timber Finish

Profiles



Specification Code: EXERAMIC 397 x 20mm



Specification Code: EXERAMIC 600 x 20mm

Availability

DESCRIPTION	TILE SIZES	LEAD TIME	MOQ
EXERAMIC 397 x 20mm Tile Profile	800, 1000, 1200, 1600mm Lengths	14-16 Weeks	300m ²
EXERAMIC 600 x 20mm Tile Profile	800, 1000, 1200, 1600mm Lengths	14-16 Weeks	300m ²

Accessories

CODE	DESCRIPTION	LEAD TIME	MOQ
ETSCS	EXERAMIC Stainless Starter Clip Single, 250 Pack	3-4 Weeks	1 Pack
ETSCD	EXERAMIC Stainless Starter Clip Double, 250 Pack	3-4 Weeks	1 Pack
ETJCS	EXERAMIC Stainless Joint Clip Single, 250 Pack	3-4 Weeks	1 Pack
ETJCD	EXERAMIC Stainless Joint Clip Double, 250 Pack	3-4 Weeks	1 Pack

System Components




Facade System



AS 1530.1 Insulation



Class 4 Membrane



Steel Top-hats



Joint Sealant

EXERAMIC

Colour Chart

Terracotta Finish



Stone & Cement Finish



Marble Finish



Timber Finish







We've Got It Covered



V1224



Blue Chip Group Pty Ltd

SYDNEY | MELBOURNE | BRISBANE | PERTH | ADELAIDE

P 1300 945 123

E sales@bluechipgroup.net.au

www.bluechipgroup.net.au

DISCLAIMER No information or advice contained in this publication is binding in any way shape or form and is provided on a without prejudice basis. All photographs and colour swatches are indicative only. All dimensions are nominal and all product data and specifications are subject to change without notice. All pricing, sales, communications and transactions are subject to Blue Chip Group's terms of trading which are available on request.