



# **ULTRAWOOD**

# Non-combustible Timber Cladding & Battens

## Description

ULTRAWOOD is an innovative new generation exterior cladding product made from highly durable marine-grade aluminium and factory pre-finished using the latest matt-effect technology in a wide range of realistic timber colours. Deemed-to-satisfy non-combustible in accordance with the BCA/NCC, it has been fully tested in Australia by CSIRO achieving excellent results to AS 1530.1 and AS 1530.3. Eco-friendly, low maintenance and incredibly durable, ULTRAWOOD is ideal for type A and B construction projects such as high rise apartments and bushfire rated areas which require non-combustible cladding.

### **Product Benefits**



#### **AS 1530.1 NON-COMBUSTIBLE**

ULTRAWOOD is a non-combustible cladding product in accordance with the relevant requirements of the NCC/BCA and has been tested by NATA accredited CSIRO to AS 1530.1 and AS 1530.3.



### MARINE GRADE DURABILITY

Along with the marine-grade aluminium base material, the matt-effect ULTRAWOOD coating has undergone extensive durability testing and has been proven to perform in the harsh Australian conditions.



#### INTELLIGENT PROFILE

The ULTRAWOOD profile has been intelligently designed to provide excellent usability such as multi-angle mating and it has double swarffree contact points for superior consistency and weather-proofing.



#### **EASY INSTALLATION**

Supplied in custom lengths, ULTRAWOOD has 155mm cover per board making it fast and easy to install to a simple sub-frame at 600mm centres using secret-fix screws and a colourmatched trim system.



#### **VERY LIGHT-WEIGHT**

Compared to many other timber cladding products, ULTRAWOOD is a very light-weight system weighing only 8.75kg per square metre offering potential structural advantages and cost savings.



#### MANUFACTURER'S WARRANTY

Despite the undisputed durability of high-grade aluminium, ULTRAWOOD cladding offers a 10yr manufacturer's warranty on all different finishes for peace of mind and guaranteed performance.



#### **NATURAL AESTHETICS**

The beautiful looking finish on the ULTRAWOOD boards is possible because the latest matteffect coating technology provides incredible richness and variation along with outstanding long-term durability.



#### **COLOUR-MATCHED TRIMS**

The ULTRAWOOD system is completed using the CLADTRIM click-together trim system covering all common construction details and finished in exactly the same matt-effect coating for a perfect match.

#### **INSTALL & TECHNICAL**

For installation and technical information, scan the QR code and view 'Downloads' tab.





### **Profiles**

	Specification Code: UW*G ULTRAWOOD Groove Profile
	<b>Specification Code:</b> UW*C ULTRAWOOD Cabin Cladding
	Specification Code: UW*S ULTRAWOOD Seam Cladding
2	<b>Specification Code:</b> UW*B5050 ULTRAWOOD 50 x 50 Batten
F 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	<b>Specification Code:</b> UW*B10050 ULTRAWOOD 100 x 50 Batten
5 1 1 1 1 1 2	<b>Specification Code:</b> UW*B15050 ULTRAWOOD 150 x 50 Batten
F. 60	<b>Specification Code:</b> UW*B20050 ULTRAWOOD 200 x 50 Batten
F 2 2	<b>Specification Code:</b> UW*B25050 ULTRAWOOD 250 x 50 Batten
	<b>Specification Code:</b> UW*B30050 ULTRAWOOD 300 x 50 Batten

# **Availability**

CODE	DESCRIPTION	LEAD TIME	MOQ
UW*G15518	ULTRAWOOD 155 x 18mm Groove (Colour), 6.5m Length	4-5 Weeks	1 Length
UW*C15525	ULTRAWOOD 155 x 25mm Cabin (Colour), 6.5m Length	14-16 Weeks	50 Lengths
UW*S20548	ULTRAWOOD 205 x 48mm Seam (Colour), 6.5m Length	14-16 Weeks	50 Lengths
UW*BXXX50	ULTRAWOOD XXX x 50mm Batten (Colour), 6.5m Length	4-5 Weeks	1 Length
UWEXXX50	ULTRAWOOD XXX x 50mm Batten End Cap (Colour)	4-5 Weeks	1 End Cap
CFM40X	COLOURFIX 40mm x 8g End Cap Screw (Colour), 100 Pack	3-4 Weeks	1 Pack

<sup>(\*)</sup> Indicates different finish options. U for Ultrawood Timber Colours and P for Powdercoat Colours

# System Components











AS 1530.1 Sarking

Breathable Barriers

Steel Facade System

Colour-match Trims

Coloured Fixing

# ULTRAWOOD

# **Colour Chart**

### **Ultrawood Colours**



Honey Maple

UW1540

UW0302

Blackwood

Coastal

Dark Cedar



Banjo Gum

UW0903





English Oak

UW1315





UW0402

Dusty Balsa



UW2015



UW1816

Tasmanian Oak Rustic Pine



UW0615

Golden Oak



UW0120

African Teak





UW1813



Rich Mahogany Red Iroko









UW0103

Alaskan Cedar







UW1510

Meranti



UW2203

Cedar

Vancouver



Californian

Redwood



UW2503 Yukon Cedar

Nannup Jarrah



Bowral Bluegum



UW1120

Kontiki Balsa









UW1703


Cedar

Queensland

UW1580 Manjimup Karri African Ebony




### **Anodised Colours**















Comet Trail\*\*





UL0314 UL1519 UL1904 Constellation Orion Sky Stellar Distance

# **Powdercoat Excel Colours**





GK236A

Pale Eucalypt

GK298A

Wilderness

GK277A

GD274A

Cove Matt

(\*\*) Gold anodised colours will not be consistent and will have signifigant variation of colour and tone both between different lengths and within a single length.

GK274A

Mangrove Matt Cottage Green

GK030A

Hawthorn

Green Gloss

GK044A

Gloss

GL035A

Heritage Green Charcoal Gloss

# ULTRAWOOD

# **Colour Chart**

# **Powdercoat Living Colours**



### **Powdercoat Vivica Colours**

GN150A

Matt

Black Satin

GN248A

Custom

Black Matt



Gloss


Matt

Metallic Gloss

### Powdercoat Anodic Colours




### Powdercoat Sable Colours

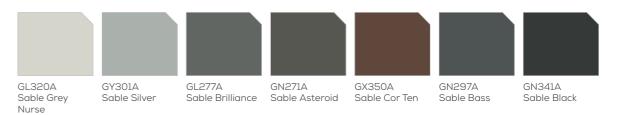

### Powdercoat Ultriva Colours



# **Powdercoat Vitality Colours**

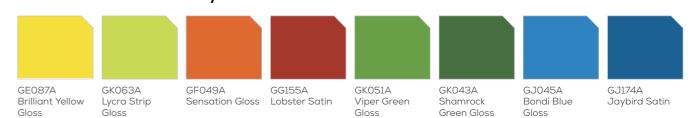

GY20BA

Matt

Dark Bronze

# **FUNDERMAX**

# **High Pressure Laminate Panel**

## Description

FUNDERMAX Max Exterior F-Quality is a duromer high pressure laminate cladding manufactured in Austria in accordance with EN-438-6 type EDF. It is factory produced using double hardened acrylic PUR resins for excellent consistency and outstanding durability. Produced in a high pressure laminate press under very high temperature, FUNDERMAX high pressure laminate cladding is extremely tough with high resistance to fading, scratching and denting making it ideal for all interior or exterior cladding applications where a low maintenance finish and long-term durability is required.

### **Product Benefits**



#### **GRAFFITI RESISTANT**

FUNDERMAX Max Exterior F-quality high pressure laminate cladding has a closed cell surface which prevents inks, paints and other graffiti materials from permanently harming





#### **DOUBLE SIDED COLOUR**

As standard all FUNDERMAX Max Exterior high pressure laminate cladding comes with the décor on both sides so that each side can be used. If one side is damaged during install simply flip to the other side.



#### **EXTREME DURABILITY**

FUNDERMAX Max Exterior high pressure laminate cladding is extremely durable even in the harshest external environments. A project installed in 1978 which was tested 33 years later had little change.



#### **UV RESISTANT**

FUNDERMAX Max Exterior high pressure laminate cladding is colourfast and offer exceptional resistance to UV light. According to EN ISO 4892-3 they are extremely lightfast with very minimal change.



#### FIRE RATED

FUNDERMAX Max Exterior high pressure laminate cladding has been tested to the Australian Standards by the NATA approved CSIRO achieving excellent results according to AS 3837 & AS 1530.3.



#### MAINTENANCE FREE

FUNDERMAX Max Exterior high pressure laminate cladding has a very high density surface finish preventing accumulation of any dirt build up allowing for virtually no maintenance if any.




#### **FULL WARRANTY**

FUNDERMAX Max Exterior high pressure laminate cladding is backed up with a 10 year warranty. However the life expectancy exceeds 33 years and has been proven to outlast many alternatives.



#### LARGE COLOUR RANGE

FUNDERMAX Max Exterior high pressure laminate cladding is available in a huge range of decors from solid, metallic, timber, metal, concrete, and graphic print options. The limit is your imagination.



# **Product Range**











FUNDERMAX Nature Decors

Material Decors

**FUNDERMAX** Metallic / Solid

FUNDERMAX Authentic Decor

FUNDERMAX Individual Decor

# **Availability**

DESCRIPTION	SHEET SIZES	LEAD TIME	MOQ
FUNDERMAX Nature Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Material Decors	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Metallic & Solid Colours	2800, 4100 x 1300mm 2800, 4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Authentic Decor	4100 x 1854mm	14-16 Weeks	100m²
FUNDERMAX Individual Decor	2800, 4100 x 1300mm	14-16 Weeks	100m²

# **System Components**











AS 1530.1 Sarking

Breathable Barriers

Steel Facade System

Specialist Tools

#### **INSTALL & TECHNICAL**

For installation and technical information, scan the QR code and view 'Downloads' tab.





# **FUNDERMAX**

# **Colour Chart**

## **Nature Decors**



## **Material Decors**



### **Metallic Colours**



# Black, Grey & White



### Neon






# **FUNDERMAX**

# **Colour Chart**

# Yellow

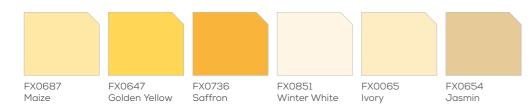

# Blue



# Green

FX0612

FX0056

Atlantis

FX0617


Petrol Green

FX0631

Turquoise




# Red

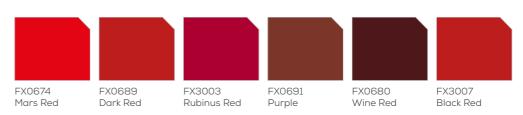

# Brown



### **Pastel**

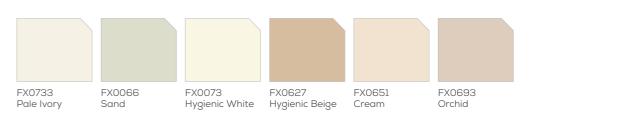

# Authentic

FXAU

# Individual Decor



FXID Individual Dec



# SELEKTA

# **Timber Composite Cladding**

## Description

Made in Germany, SELEKTA timber composite cladding is a unique, prefinished product with a beautiful timber grain embossed surface. Designed for stability and longevity with style, SELEKTA timber composite cladding is eco-friendly, maintenance free and incredibly easy to install. SELEKTA timber composite cladding has been subjected to extreme endurance tests, including swell tests and UV tests. After being subjected to a wide range of extreme environmental conditions and temperature fluctuations between -30° and +70° Celsius, the product responded brilliantly, outlasting wind and weather for 30 years.

### **Product Benefits**



#### NCC 2022 COMPLIANCE

SELEKTA timber composite cladding is compliant with NCC 2019 for use as external cladding on all type C\* construction projects ensuring you are specifying a compliant product tested to Australian standards.



### SECRET FIXING

SELEKTA timber composite cladding comes with a simple tongue and groove fixing system with machined screw slots for ease and speed of installation saving any need for pre-drilling each length.

SELEKTA timber composite cladding is the

only timber based cladding that cannot leach




#### **BAL 29 FIRE RATING**

**AS 5113 FIRE TESTING** 

MAINTENANCE FREE

SELEKTA timber composite cladding has been tested to AS fire standards and achieves a BAL 29 fire rating along with excellent group rating as per AS 3837 for exterior cladding.



#### profile allowing for a beautiful look that will last.

**NON LEACHING** 

**ACOUSTIC RATING** Laboratory acoustic testing results are available. SELEKTA timber composite cladding is the perfect material to use on multi-residential high

density developments to improve acoustics.




SELEKTA timber composite cladding has been tested as per the new AS 5113 full-scale facade fire test which is required for CV3 performance based solutions on all type A & B construction.

SELEKTA timber composite cladding is




#### **FULL WARRANTY**

SELEKTA timber composite cladding comes with a comprehensive 10 year warranty backed by the German based manufacturer. Guaranteed quality and peace of mind for your



Highly resistant to damage caused by termites and fungal decay and does not need any ongoing sealing, oiling or re-painting.





**Specification Code:** SK\*\*\*\* SELEKTA 155 x 18

### **Availability**

CODE	DESCRIPTION	LEAD TIME	моо
SK1560	SELEKTA 155 x 18mm White Birch, 5.4m Length		1 Length
SK0820	SELEKTA 155 x 18mm Cedar, 5.4m Length		1 Length
SK1520	SK1520 SELEKTA 155 x 18mm White Oak, 5.4m Length		1 Length
SK1570	SELEKTA 155 x 18mm Silver Oak, 5.4m Length	Stock	1 Length
SK1540	SELEKTA 155 x 18mm Dark Cedar, 5.4m Length	Stock	1 Length
SK1510	SELEKTA 155 x 18mm Meranti, 5.4m Length	Stock	1 Length
SK1580	SELEKTA 155 x 18mm African Ebony, 5.4m Length	Stock	1 Length
SKMISC	Group 1 Colours are Supplied to Order, 5.4m Lengths	10-12 Weeks	288 Lengths
SKMISC	MISC Group 2 Colours are Supplied to Order, 5.4m Lengths		288 Lengths
SKS****	SELEKTA Touch-up & End-sealer (Insert Colour)	Stock	1 Can

# System Components



AS 1530.1 Sarking



Breathable Barriers



Steel Facade System





\*For types A & B construction, use ULTRAWOOD non-combustible aluminium cladding - see page 40.

#### **INSTALL & TECHNICAL**

For installation and technical information, scan the QR code and view 'Downloads' tab.





# SELEKTA

# **Colour Chart**

(s) after colour names indicates stock colours. All other colours require lead times and minimum order quantities.

# **Timber Colours**



White Birch (s) Silver Oak (s)







Dark Cedar (s) Meranti (s)



# Solid Colours - Group 1



SK6360 SK2150 Coast White



Cream White Lava White



Stone White



SK6710





Dune White



SK6260 Arctic White



Soft Coast



Soft Arctic



SK6340



SK6390 Deep Coast



SK6140



Ashes White



Earth White

SK6790 Deep Earth

# Solid Colours - Group 2



SK6010 Dawn White

SK6330

Ocean



SK6060 Moss White

SK6290

Deep Arctic



SK6860 Moon White



SK6170 Soft Fog



SK6090 Deep Moss

SK6590

Deep Canyon



SK6210



SK6320 Soft Ocean



SK6800 Soft Dune

SK6820





Volcanic

Bright Earth



SK6650 SK6400 Bright Volcanic Royal Red





SK6740

SK6450



SK6730

SK6580

Canyon





















#### Blue Chip Group Pty Ltd

SYDNEY | MELBOURNE | BRISBANE | PERTH P 1300 945 123

E sales@bluechipgroup.net.au

#### www.bluechipgroup.net.au

DISCLAIMER No information or advice contained in this publication is binding in any way shape or form and is provided on a without prejudice basis. All photographs and colour swatches are indicative only. All dimensions are nominal and all product data and specifications are subject to change without notice. All pricing, sales, communications and transactions are subject to Blue Chip Group's terms of trading which are available on request.